
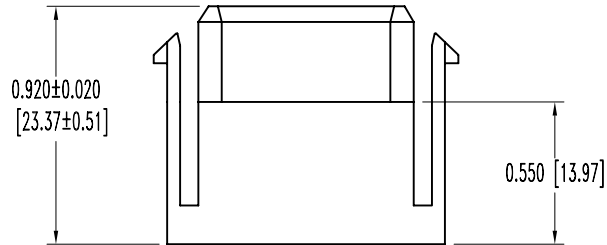



SK7494

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

| DATE    | REV | REVISION RECORD | APP | DR | CK |
|---------|-----|-----------------|-----|----|----|
| 5-30-06 | NC  | ECO 26017       |     | YK |    |
|         |     |                 |     |    |    |
|         |     |                 |     |    |    |

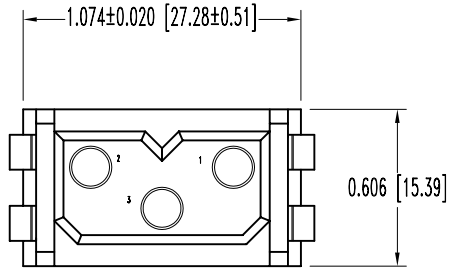

NOTES:

- MATERIALS AND FINISHES:  
INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.
- ELECTRICAL CHARACTERISTICS:  
INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a.  
WORKING VOLTAGE: 1,250 V r.m.s.
- WORKING TEMPERATURE: -55°C TO +125°C.
- CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

|   |                         |  |                 |
|---|-------------------------|--|-----------------|
|  |                         | <b>POSITRONIC INDUSTRIES INC.</b><br>www.connectpositronic.com |                 |
|   |                         | PCS SERIES   | SCALE<br>N.T.S. |
| DECIMAL TOL.<br>$\pm 0.015$ [0.38]  | TITLE<br>PLB3W3F0000/AA |  |                 |
| ANGULAR TOL.<br>$\pm 5^\circ$   | DATE<br>5-30-06         | DRAWING NUMBER<br>SK7494                                       | REV.<br>NC      |