

规格承认书

Specification For Approval

客户名称:

(Customer Name)

产品名称:

(Product Name)

客户料号:

(Customer part number)

科尼盛料号:

(KNSCHA number)

型号规格:

(Specifications)

日期:

DATE

Y安规电容

Y Safety Capacitance

AJTF222M2GF0200A082E

Y1 222M/400VAC P=10mm Y5V

2025.6.9

制 造 Manufacture	
核 准 APPROVAL	制 作 PREPARED
刘军军	陆美秀

客户承认栏 CUSTOMER APPROVED		
核 准 APPROVED	确 认 CHECKED	经 办 DESIGNED

广东科尼盛电子科技有限公司

KNSCHA ELECTRONICS CO., LIMITED.

No. 8th floor, A3 building, R&D center (Phase I),

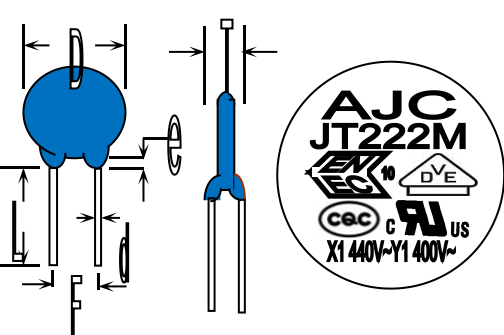
Songshan Lake Intelligent Valley, Liaobu Town, Dongguan City.

TEL: 0769-83698067 81035570 FAX: 0769-83861559

Email: sales@knscha.com Website: <http://www.knscha.com>



产品承认规格

产品名称		Y1 交流陶瓷电容器		执行标准		IEC 60384-14 2013-06 Edition 4				
规格描述		JT Y5V-222M/400V F10*L25		产品编码		70Y10014				
1.温度特性		(@-25℃~+85℃) △C/C ₂₅ : +22% ~ -56%								
2.工作温度范围		-25℃~+125℃								
3.外观、印字要求		产品本体表面光洁，无损坏；激光印字清晰、正确、完整；引脚无氧化，无异物。								
4.印字、尺寸标准(mm)				实测记录						
				D	8.0±1.0	7.79	7.82	7.75	7.86	7.89
				T	4.0±0.8	4.05	3.98	4.06	4.03	3.92
				F	10.0±0.8	10.05	10.00	10.06	10.11	10.15
				L	25.0±3.0	25.32	25.17	25.20	25.15	25.09
				d	0.55±0.05	0.55	0.55	0.55	0.55	0.55
				e	3.0max	1.07	1.24	1.10	1.15	1.21
5.性能标准				实测记录						
电 容 量	2200PF ±20%			2255	2334	2129	2226	2310		
损 耗 角	≤0.025			0.0027	0.0029	0.0036	0.0028	0.0032		
耐 电 压	无击穿，无飞弧(4000VAC60S)			PASS	PASS	PASS	PASS	PASS		
绝缘电阻	≥6000MΩ (100VDC 充电 60S)			PASS	PASS	PASS	PASS	PASS		
测试仪器	ZX6517 容量损耗测试仪 LK2672 耐压测试仪 TH2681A 绝缘电阻测试仪									
测试条件	1KHz 1.0V 25±3℃ 55±30%RH									
6.产品认证										
认证机构	符号			认证标准			证书号			
CQC				IEC 60384-14 2005			CQC15001132573			
UL				UL 60384-14 2014-07 CSA E60384-14 2014-10 CSA E60384-1 2014-10			E477850			
VDE				DIN EN 60384-14 (VDE 0565-1-1):2014-04 IEC 60384-14 (ed.4)			40043090			
7.环保标准	符合 RoHS2.0 REACH 无卤素标准									
8.包装标准	散装 1000PCS/包									