


RoHS





目錄
MAPX

設定內容
MODIFICATION

日期
DATE

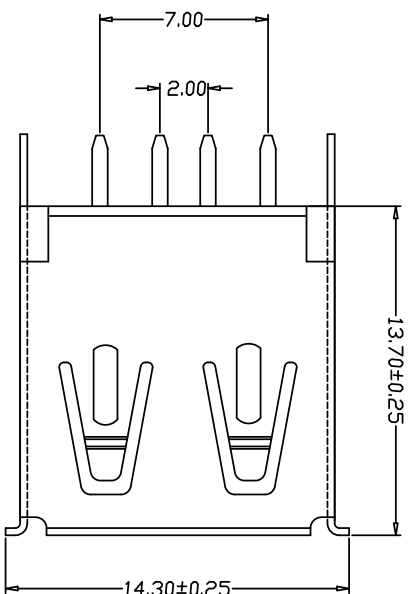

PCB LAYOUT

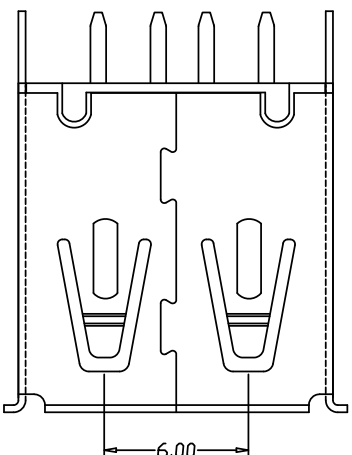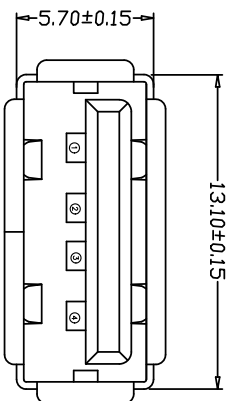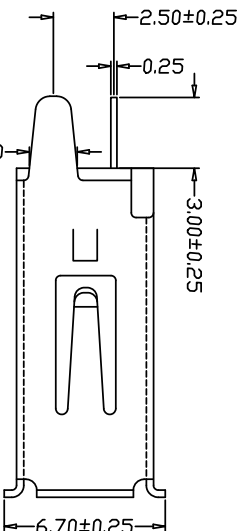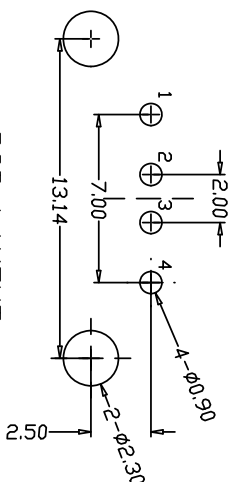

深圳市精拓金电子有限公司

产品图 PRODUCT CHART DWG				单位 UNITS			
PIN NUMBER	SIGNAL NAME	公差一览表 TOLERANCE UNLESS OTHERWISE		比例 SCALE	日期 DATE	审核 CHKD	角法 NEW
1	VBUS	X	±0.35	X	±9°	1:1	审核
2	D-	X	±0.30	X	±2°	G Z F	产品料号
3	D+	.XX	±0.25	.XX	±1°	2021/03/10	产品名称
4	GND	.XXX	±0.10	.XXX	±0.5°	黄国荣	AF13.7直脚180度有边锡完T8T黑胶

- 电气特性:Electrical:
- 额定电流: Current Rating
1.5A/contact terminal
 - 额定电压: Voltage Rating
30V DC
 - 接触阻抗: Contact Resistance
30 milliohms MAX
 - 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
 - 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN
- 物理性能: Mechanical:
- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
 - 端子保持力: Terminal Retention
1.0kgf (MIN)
 - 寿命: 1500 次
- 原材料: Material:
- 塑胶: Housing: pbt bk
 - 端子: Contact: Copper Alloy C2680
 - 外壳: Shell: c2680
- 电镀: Finish:
- 端子Contact: Au G/F u" Plated on contact area
Tin50u" Plated on solder area
Nickel 50u" Plated underplating over all.
 - 外壳Shell: Nickel 50u" Min plating over all.