


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A			2025.12.22	

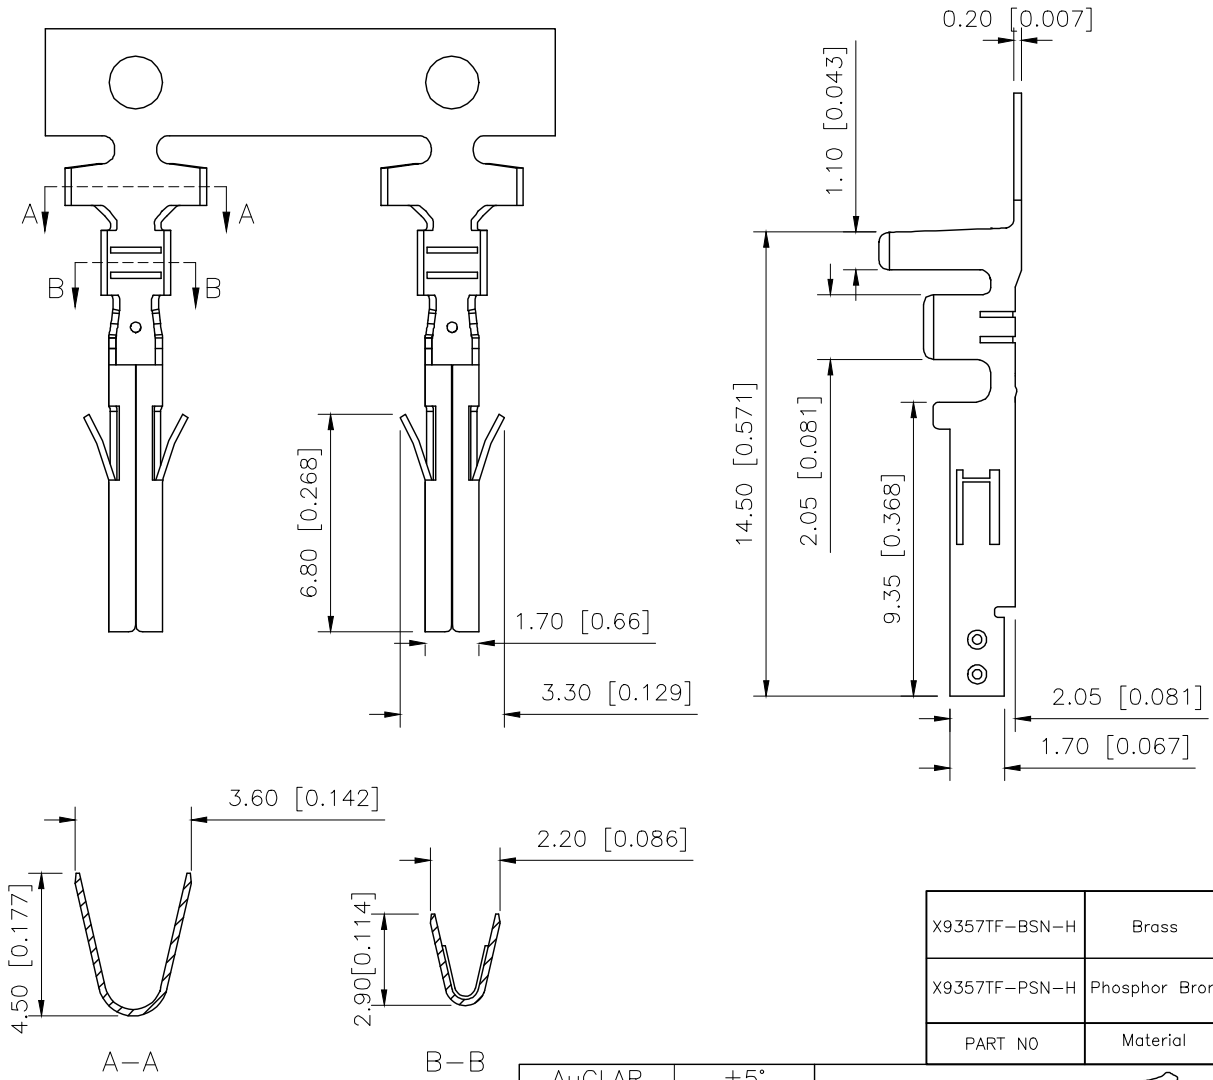

- Specifications
- Voltage rating: 600V AC/DC
 - Current rating: 9A AC/DC
 - Withstanding voltage: 1500V AC/minute
 - Temperature range: -45° to +125°
 - Insulation resistance: $\geq 1000\text{M}\Omega$ Min
 - Contact resistance: $\leq 10\text{m}\Omega$ Max
 - After environmental testing: $\leq 20\text{m}\Omega$

PART NO.:
X9357 I F-B SN-H

Series No
Category: T-terminal
Shape: F-Female
Material: P-Phosphor bronze; B-Brass
Plating style: SN-Bright tin plating
Special No: H-High Leads

X9357TF-BSN-H	Brass	AWG#16-24	3.10mm(Max)	Stamping Before Plating :30u" MIN. Ni70u"Sr MIN.	X9357HM
X9357TF-PSN-H	Phosphor Bronze				
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	VIEW:	MODEL TYPE: 4.20 mm Crimp Style Connector
CHECKED	UNIT: mm/in	PART NO.: X9357TF-BSN-H
APPROVED	SIZE: A4	DWG NO.: