

标 记  
MARKECN编号/变更内容  
ECN NO/DEFINITION修 改  
REVISE日 期  
DATE核 准  
APPROVE

A

B

C

D

E

F

G

A

B




C

D

E

F

G

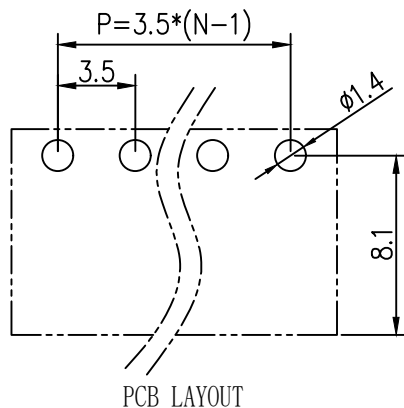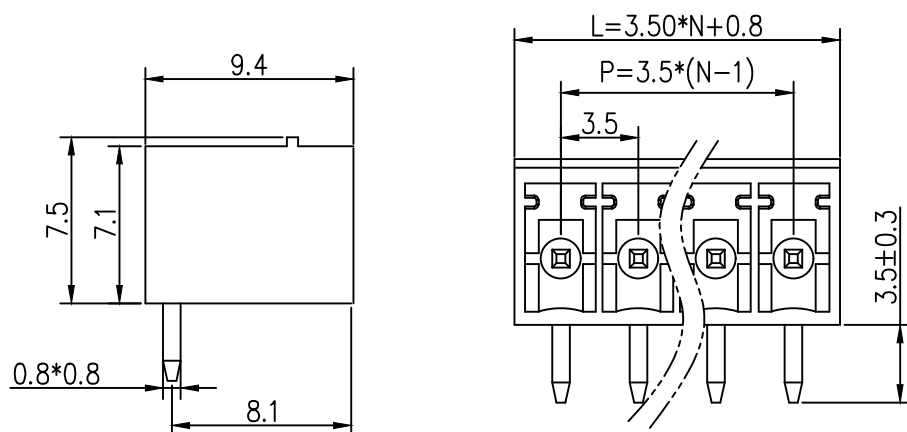

## Materials and Electroplating

- ①. Plastic body: PA66,
- ②. Solder pin: copper, Nickel tin plating

## Electrical performance

Rated voltage: 300V

Rated current: 8A

Contact resistance: 20m Ω (Max)

Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1min

## mechanical properties

Temperature range: -40 ℃~+105 ℃

Instantaneous temperature: +250 ℃, 5 seconds

|    |    |      |       |    |
|----|----|------|-------|----|
| 2  | 插针 | 铜    | 镀镍锡   |    |
| 1  | 底座 | PA66 | 绿色    |    |
| 序号 | 品名 | 材质   | 电镀/颜色 | 备注 |

|                                                                                       |             |               |               |                                                                                       |
|---------------------------------------------------------------------------------------|-------------|---------------|---------------|---------------------------------------------------------------------------------------|
|  | 深圳市虹成电子有限公司 |               | 品名<br>TITLE   | 接线端子                                                                                  |
|                                                                                       |             |               | 料号<br>PART NO | HC-JXDZRC-3.5-8P                                                                      |
| GENERAL TOLERANCES<br>(UNLESS SPECIFIED)                                              |             | 比列<br>SCALE   | 1:1           |  |
| 公差参数                                                                                  |             | 单位<br>UNIT    | MM            | 制图<br>DRAW                                                                            |
| 2-6P ±0.10 ±0.20 X.X ±0.35                                                            |             | 张数<br>PART NO | 1 OF 1        | 审核<br>CHECKED                                                                         |
| 7-12P ±0.20 ±0.30 X.XX ±0.25                                                          |             | 版本<br>REV     | A             | 批准<br>APPROVE                                                                         |
| 13-18P ±0.25 ±0.40 X.XXX ±0.15                                                        |             |               |               | 夏操云                                                                                   |
| 19-24P ±0.30 ±0.50 X.XXX ±0.15                                                        |             |               |               | 赵亮亮                                                                                   |