


代码: KH-FS1500-SMA11L

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

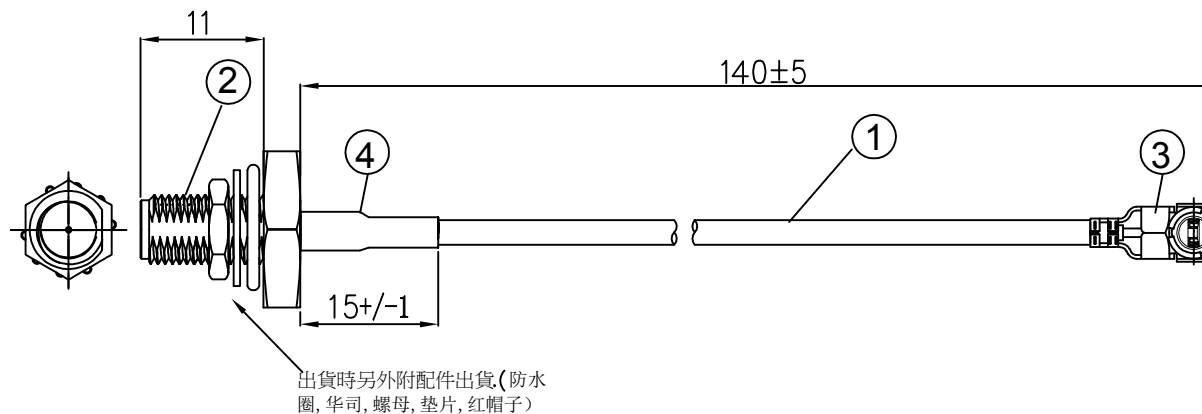

NOTES:

- ELECTRICAL:
 - VOLTAGE RATING:DCV 300V 10MS
 - CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - INSULATION RESISTANCE: 5.0M OHM/MIN.
 - THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
- MATERIAL:
 - SEE TABLE
- ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿I-PEX ,1.13端子, 镀金	1
②	接头	SMA防水母头母针, 后塞, 11牙, 镀金	1
①	同轴线	RF 1.13灰色线,OD:1.13mm	AS

Kinghelm® 深圳市金航标电子有限公司

ALL DIMENSION ARE IN MM	DRAWN Jamy	DATE 2022-06-06	I-PEX 1.13 TO SMA 11牙防水母头 L=140mm	
	ENG.			
COMPUTER GENERATED IN SOLIDWORKS	MFG.			
DO NOT SCALE THIS DRAWING	Q.A.			
PROJECTION	GENERAL TOLERANCE FOR ANGLES X.X X.XX ± 1° ± 0.3 0.25 0.150		SIZE Number B X.XXX	REV A
CUSTOMER P/N:		SCALE: Free	TYPE	SHEET 1 OF 1