

AudioLarm II

CH-V09-301-W(M)



More Information

Chime Tone



[Spec Sheet](#)




[UL Recognized](#)



RoHS Compliant

OUTPUT SOUND and CURRENT CONSUMPTION
vs. INPUT VOLTAGE PERFORMANCE.

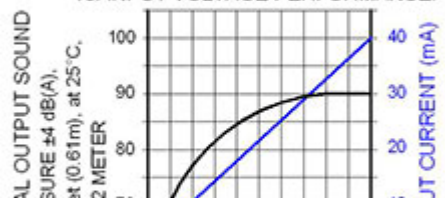

Specifications

Revision: 7.18

Medium Loud Chime Tone; Moderate Rate; Panel Mount with Volume Control Case and Wires Termination

Mounting:	Panel Mount with Volume Control
Operating Mode:	Medium Loud Moderate Chime Tone
Operating Voltage:	220 Vac
Operating Frequency:	
Typical Operating Current:	40 mA at 220 Vac
Typical Sound Pressure:	93±5 dB(A), at 220 Vac, at 24 inches (61 cm), at 25°C
Termination:	Wires
Termination Strength:	Pull test with a maximum of 22 pounds (10 kg) load
Operating Temperature:	-20_C to +65_C
Storage Temperature:	-40_C to +85_C
Surge Voltage:	20% over maximum rated voltage for less than 5 minutes
Reverse Voltage Protection:	To the maximum operating voltage
Construction Materials:	

Internal Circuit- Audio-oscillator and piezoelectric driver
Potting- 2 parts epoxy resin or silicone, black
Diaphragm- Stainless Steel 304

Gasket:

Environmental Durability: ASTM B117 Certified - Withstands exposure to salt spray for 300 hours
IP 68 Certified - Withstands water submergence and dust exposure
Humidity- 95% relative humidity at +40_C continuously for 100 hours.
Vibration- Withstands vibration between 0 and 55 Hz. on all axes.

Life Expectancy: 10 years under normal operating conditions.

Warranty: For a period of two years from the date of manufacture under normal operating conditions.

[View Terms and Conditions of Sale](#)

Dimensions

