

Pitch:2.00mm(0.079 ")
Female Header Single Row Right Angle Type

ELETE
—Professional Connecting Solutions—
HFLSR63 Series




Specifications

Current Rating:2.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials



Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

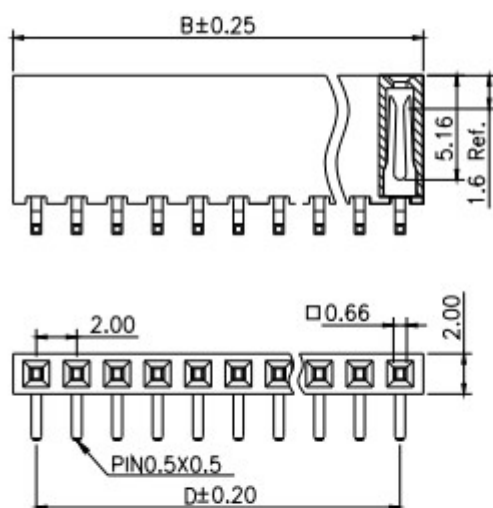


PS:Suggested Mating Pin Length:3.0~4.9mm


Mating with




HMLSSXX



HMLSNXX




HMLSRH20




HMLSNH15/
HMLSVH15



HMLSSH20



HMLSR20



HMLSP15

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	D	B		D	B		D	B		D	B
02	2.00	4.30	12	22.00	24.30	22	42.00	44.30	32	62.00	64.30
03	4.00	6.30	13	24.00	26.30	23	44.00	46.30	33	64.00	66.30
04	6.00	8.30	14	26.00	28.30	24	46.00	48.30	34	66.00	68.30
05	8.00	10.30	15	28.00	30.30	25	48.00	50.30	35	68.00	70.30
06	10.00	12.30	16	30.00	32.30	26	50.00	52.30	36	70.00	72.30
07	12.00	14.30	17	32.00	34.30	27	52.00	54.30	37	72.00	74.30
08	14.00	16.30	18	34.00	36.30	28	54.00	56.30	38	74.00	76.30
09	16.00	18.30	19	36.00	38.30	29	56.00	58.30	39	76.00	78.30
10	18.00	20.30	20	38.00	40.30	30	58.00	60.30	40	78.00	80.30
11	20.00	22.30	21	40.00	42.30	31	60.00	62.30			