



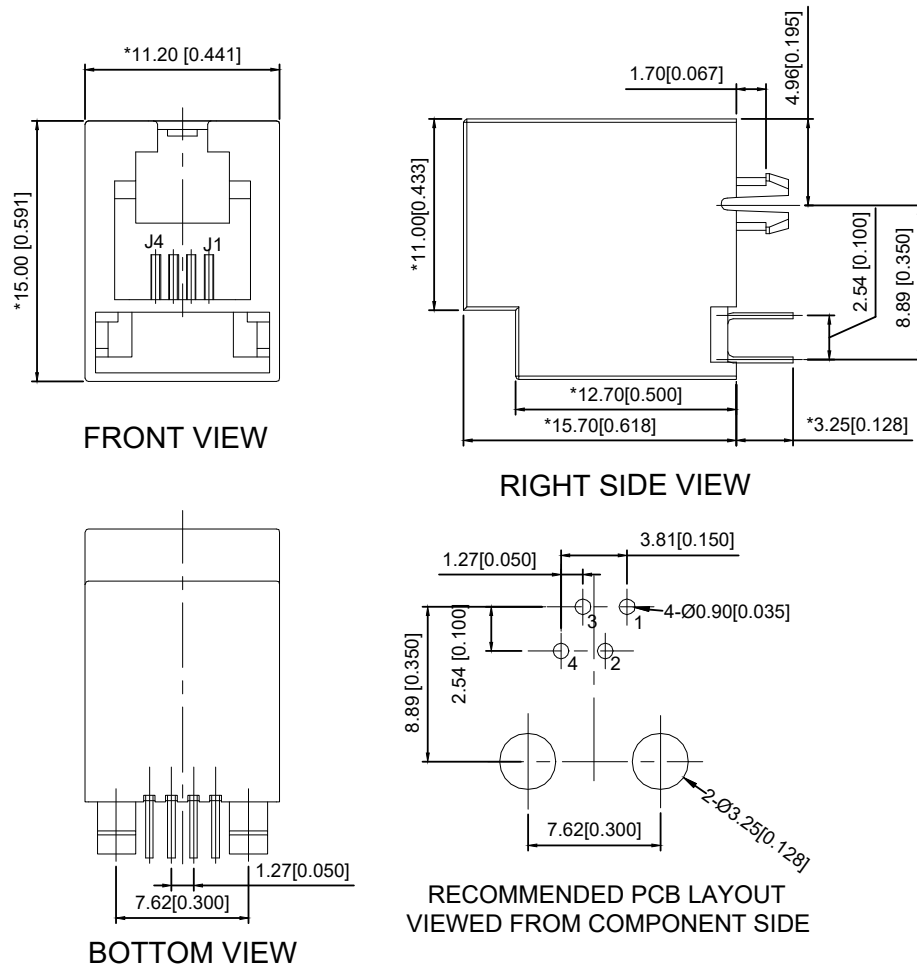

PCB SIDE TO PHY

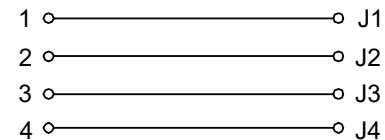

CABLE SIDE

XKB Connectivity

MATERIAL 材料:

HOUSING 外壳: PBT,UL94V-0,BLACK.

TERMINALS BRACKET 端子支架: PBT,UL94V-0,RED.

TERMINAL 端子: PHOSPHOR BRONZE T=0.30MM

GOLD PLATING ON CONTACT AREA.

MECHANICAL 机械:

DURABILITY 耐用性: 750 CYCLES MIN,12.5MM/MINUTE.

INSERTION FORCE 插入力:2.2KG.F MAX

RETENTION STRENGTH 保持力:7.7KG.F BETWEEN JACK AND PLUG.

OPERATING TEMPERATURE 工作温度: -40°C~+85°C.

STORAGE TEMPERATURE 储存温度: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH ""

ELECTRICAL 电气:

VOLTAGE 电压: 125 VOLTS AC.

CURRENT RATING 电流额定值: 1.5AMP.

DIELECTRIC STRENGTH 介电强度: 1000 VAC RMS 50HZ OR 60HZ,1 MIN

INSULATION RESISTANCE 绝缘电阻: 500 MEGA OHMS MIN.INITIAL

AFTER 500V DC FOR 1 MINUTE.

CONTACT RESISTANCE 接触电阻:SINGLE TERMINAL 30 MILLIOHMS MAX.

INITIAL 50 MILLIOHMS MAX. AFTER

DURABILITY TEST.

						DSND		SCALE: N/A	MODEL TYPE: RJ JACK		
ΔX					ANGLAR	±5°		DWN	VIEW: 	PART NO.: X02AKIWA1DB4134	
ΔX					L≤ 4	±0.2		CHKD	UNIT: mm/in	DWG NO.: X02AKIWA1DB4134	
ΔX					4<L≤ 16	±0.3					
ΔX					16<L≤ 63	±0.4					
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5		APPD	SIZE: A4		
						UNSPECIFIED TOLERANCES					
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
										1/1	A0