
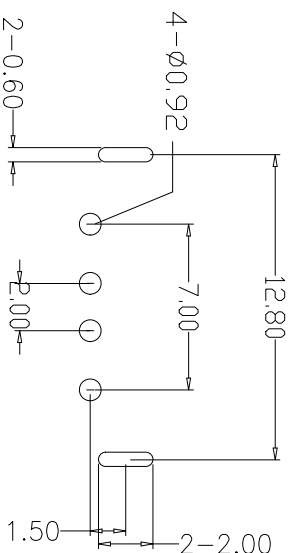
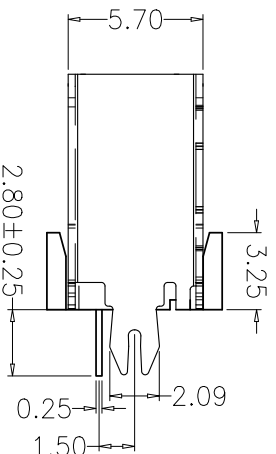
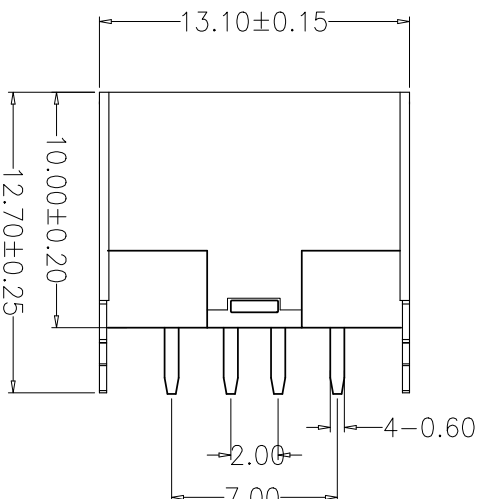


RoHS

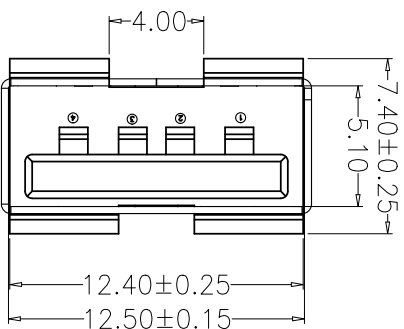

电气特性:Electrical:

1. 额定电流: Current Rating

1. 5A/contact terminal

2. 额定电压: Voltage Rating

30V DC

3. 接触电阻:Contact Resistance

30 milliohms MAX

4. 耐电压:Dielectric Withstanding Voltage:

500 V AC AT Sea Level

5. 绝缘电阻:Insulation Resistance:

1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Cnector Mate and Unmate Force

Mate force:3. 57kgf (MAX)

Unmate force:0. 1kgf (MIN)

2. 端子保持力: Terminal Retention

1. 0kgf (MIN)

3. 寿命: 1500次

原材料:Matorial:

1. 塑胶:Housing:LCP /pbt

2. 端子:Contact:Copper Alloy C2680

3. 外壳:Shell:SPCC/c2680

电镀:Finish:

1. 端子Contact: Au G/F u" Plated on contact area

Tin50u" Plated on solder area

Nickel 50u" Plated underplating over all.

2. 外壳Shell: Nickel 50u" Min plating over all.

Pin NUMBER	SIGNAL NAME
1	VBI5
2	D-
3	D+
4	GND

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

单位

MM

制图

L S S

产品料号

916-362A1014Y10203

比例

1:1

审核

G Z F

产品名称

AF100摄像头180度鱼叉脚无磁无弹脚穿BT白胶

日期

2021/03/10

核准

黄国荣

角法

版本

AO

VER

AO