

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20


© COPYRIGHT 20

BY -



ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	09MAR2015	DL	CW
	B	ECR-15-014907	14OCT2015	DL	CW
	B1	ECR-16-015492	18NOV2016	QY	CW

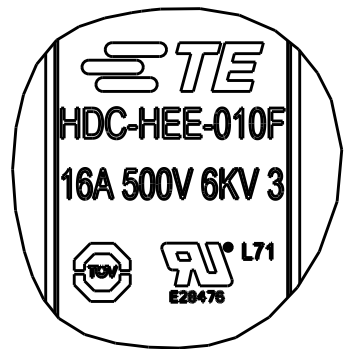




DETAIL A
4:1

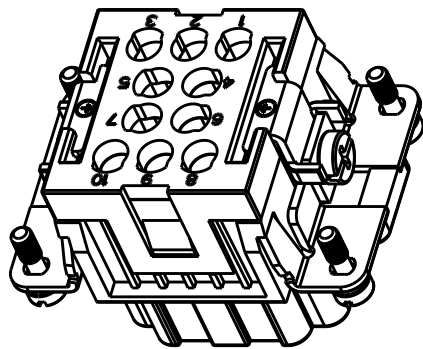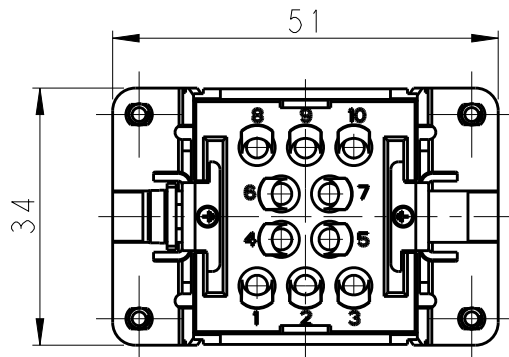

TYPE-1, T2050102201-000, TE LOGO
类型-1, T2050102201-000, TE LOGO



- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500 V
RATED CURRENT: 16 A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6 KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-4 mm² (26-12 AWG)
CONTACT TYPE: CRIMP CONTACT
 - CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. T20300X20XX-000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6 KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-4 mm² (26-12 AWG)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号 T20300X20XX-000)

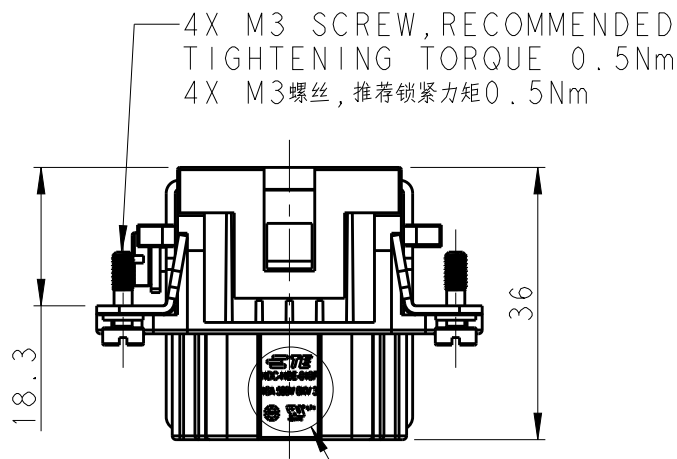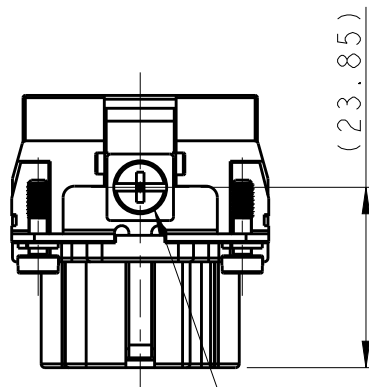

M4 SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4螺丝, 推荐锁紧力矩1.2Nm

DETAIL A

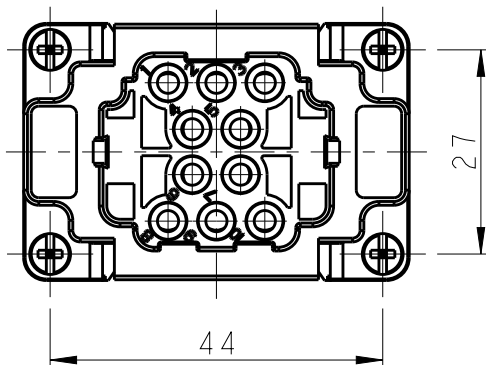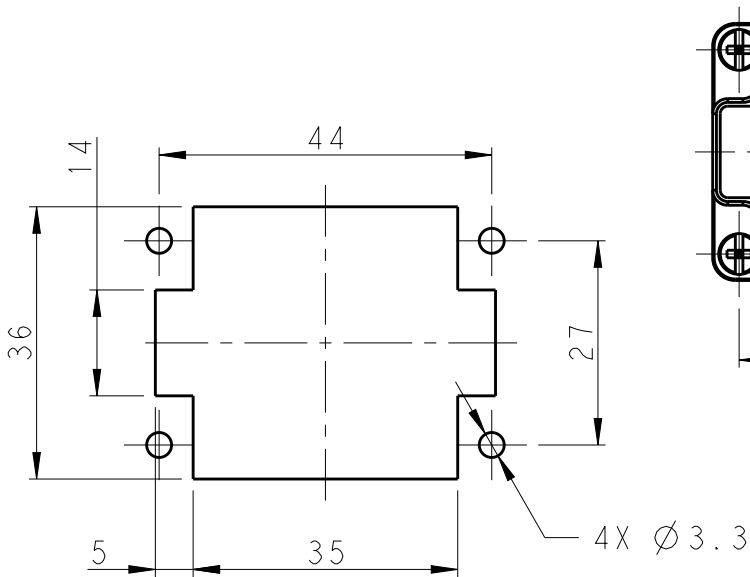

PANEL CUT FOR INSERTS FOR USING
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 09MAR2015	 TE Connectivity		
		CHK CHRIS WANG 09MAR2015			
		APVD XU XIANG 09MAR2015			
		PRODUCT SPEC 108-106137			
		APPLICATION SPEC 114-106137	NAME HEE-010-F		
MATERIAL -		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO C-T2050102201000
Customer Drawing		SCALE 1:1	SHEET 1 OF 3	RESTRICTED TO -	
				REV B1	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20


© COPYRIGHT 20

BY -






ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-




DETAIL B
4:1

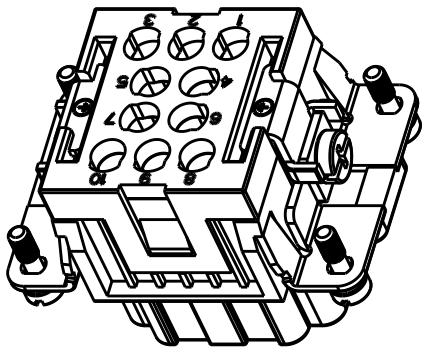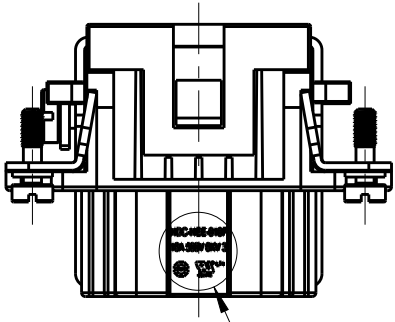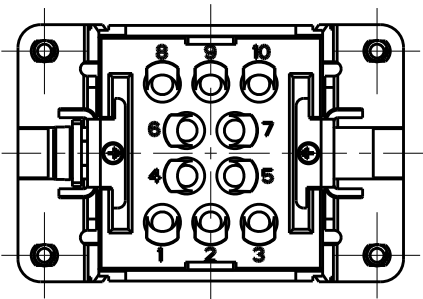


DETAIL B

TYPE-2, T2059102201-000, NO TE LOGO
类型-2, T2059102201-000, 无TE LOGO

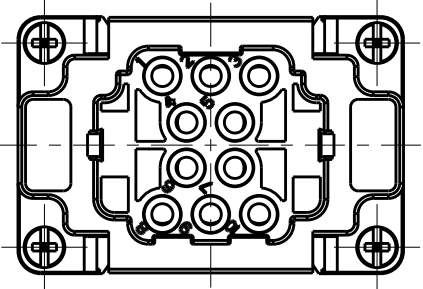


ALL SPEC DIMENSION REFER TO TYPE I
所有产品规格尺寸参照 TYPE I

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 09MAR2015	 TE Connectivity		
		CHK CHRIS WANG 09MAR2015			
		APVD XU XIANG 09MAR2015	NAME HEE-010-F		
		PRODUCT SPEC 108-106137			
		APPLICATION SPEC 114-106137			
		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO T2050102201000
		Customer Drawing	SCALE 1:1	SHEET 2 OF 3	REV B1






DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC ±-	
		1 PLC ±-	
		2 PLC ±-	
		3 PLC ±-	
		4 PLC ±-	
		ANGLES ±-	
MATERIAL -		FINISH -	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

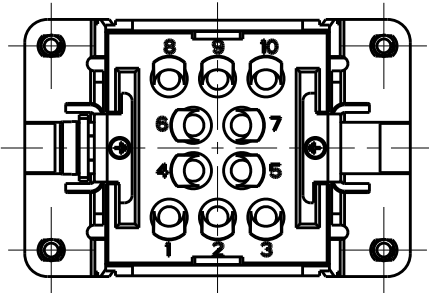

NOTE:
SEE SHEET 1

注释:
见页 1

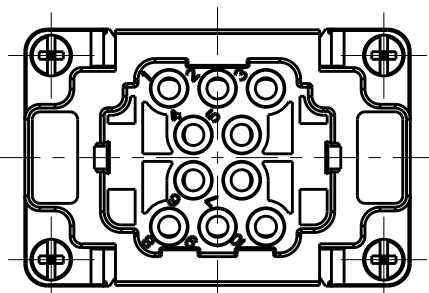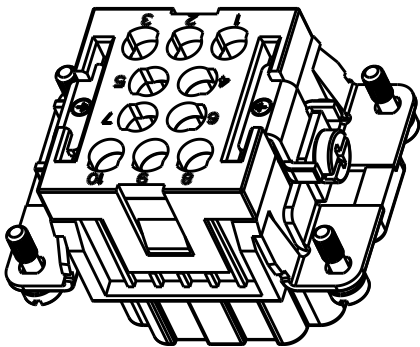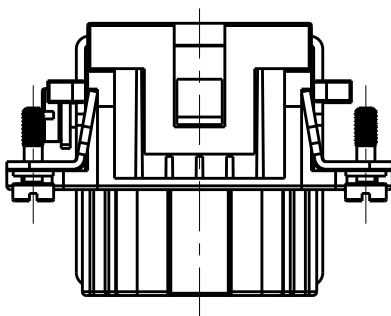

TYPE-3,T2050102201-001,STAINLESS STEEL SCREW,NO LOGO
类型-3,T2050102201-001,不锈钢螺丝,无LOGO

T2050102201-001	HEE-010-F	HEE-010 FEMALE INSERT, STAINLESS STEEL SCREW,NO LOGO HEE-010 母插,不锈钢螺丝,无LOGO	TYPE-3 类型-3
T2059102201-000	HEE-010-F	HEE-010 FEMALE INSERT,NO TE LOGO HEE-010 母插,无TE LOGO	TYPE-2 类型-2
T2050102201-000	HEE-010-F	HEE-010 FEMALE INSERT HEE-010 母插	TYPE-1 类型-1
PART NUMBER 料 号		PART DESCRIPTION 描 述	TYPE 类 型

ALL SPEC DIMENSION REFER TO TYPE 1
所有产品规格尺寸参照 TYPE 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 09MAR2015	TE Connectivity		
		CHK CHRIS WANG 09MAR2015			
		APVD XU XIANG 09MAR2015			
		PRODUCT SPEC 108-106137			
		APPLICATION SPEC 114-106137	NAME HEE-010-F		
		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO T2050102201000
		Customer Drawing	SCALE 1:1	SHEET 3 OF 3	REV B1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T2050102201-000](#)