
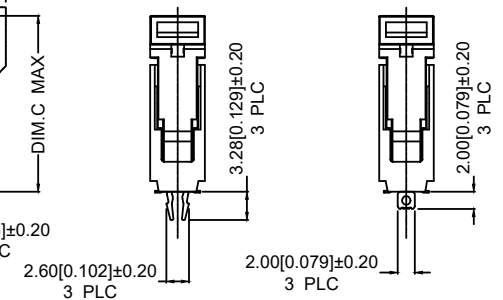
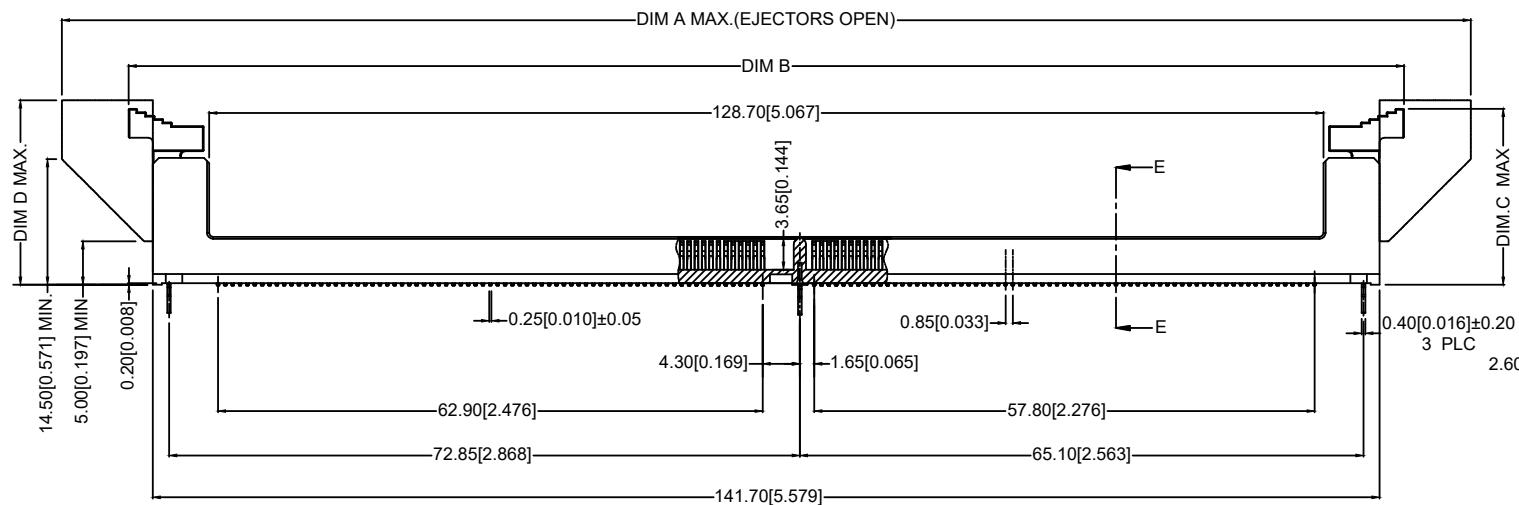



TAB TYPE

					ANGLAR	±5°
ΔX					L ≤ 4	±0.2
ΔX					4 < L ≤ 16	±0.3
ΔX					16 < L ≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						




XKB INDUSTRIAL PRECISION CO.,LIMITED


DSND		SCALE: N/A	MODEL TYPE:		
DWN		VIEW: 	PART NO.:		
CHKD		UNIT: mm/in	X9413WVS-288T2-9TV15		
APPD		SIZE: A4	DWG NO.:		
			X-X9413WVS-288T2-9TV15		
PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0

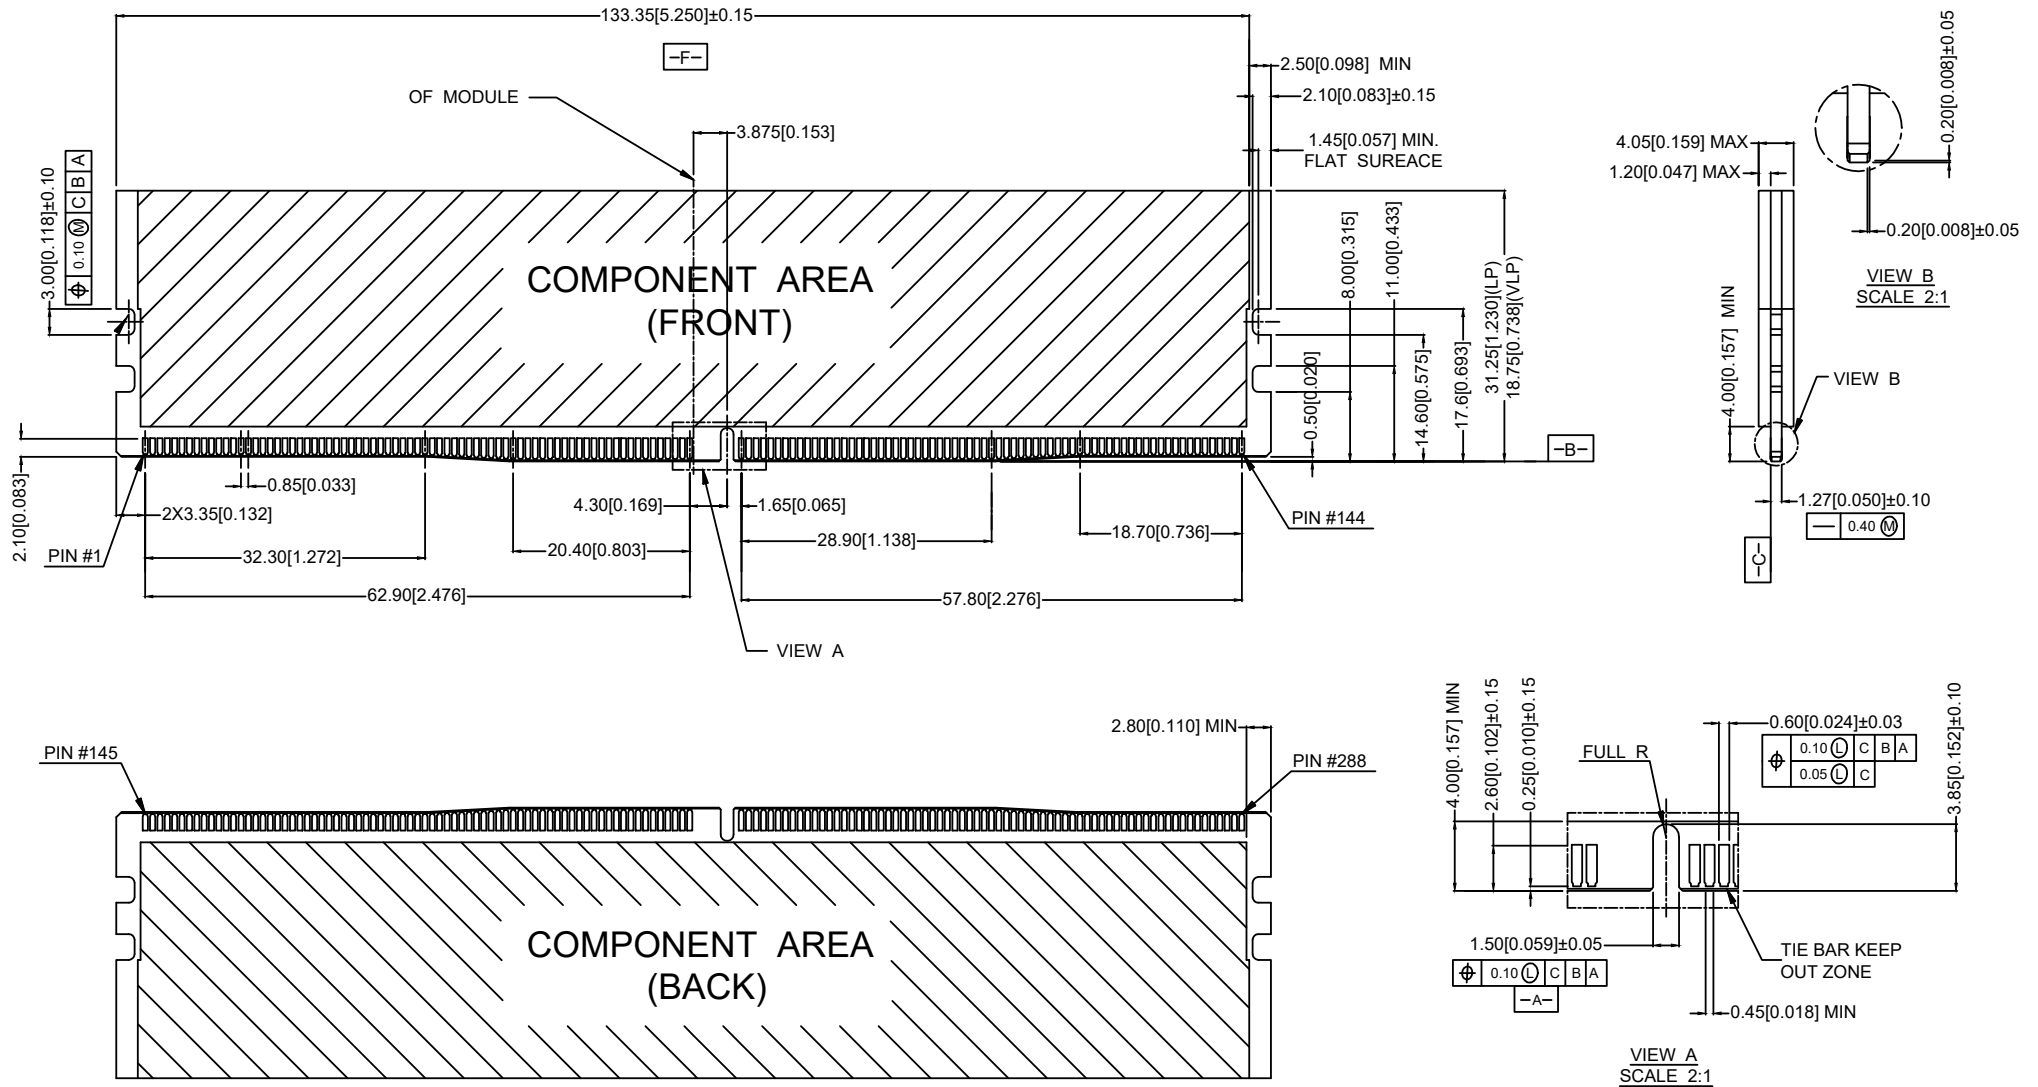

						DSND		SCALE: N/A	MODEL TYPE:			
Δx					ANGLAR		DWN	VIEW: 	PART NO.:			
Δx					L≤ 4		±0.2	CHKD	UNIT: mm/in	X9413WVS-288T2-9TV15		
Δx					4<L≤ 16		±0.3			DWG NO.:		
Δx					16<L≤ 63		±0.4			X-X9413WVS-288T2-9TV15		
MARK	DESCRIPTION			DATE	REVISED	APPROVED	APPD		SIZE: A4			
						UNSPECIFIED TOLERANCES						

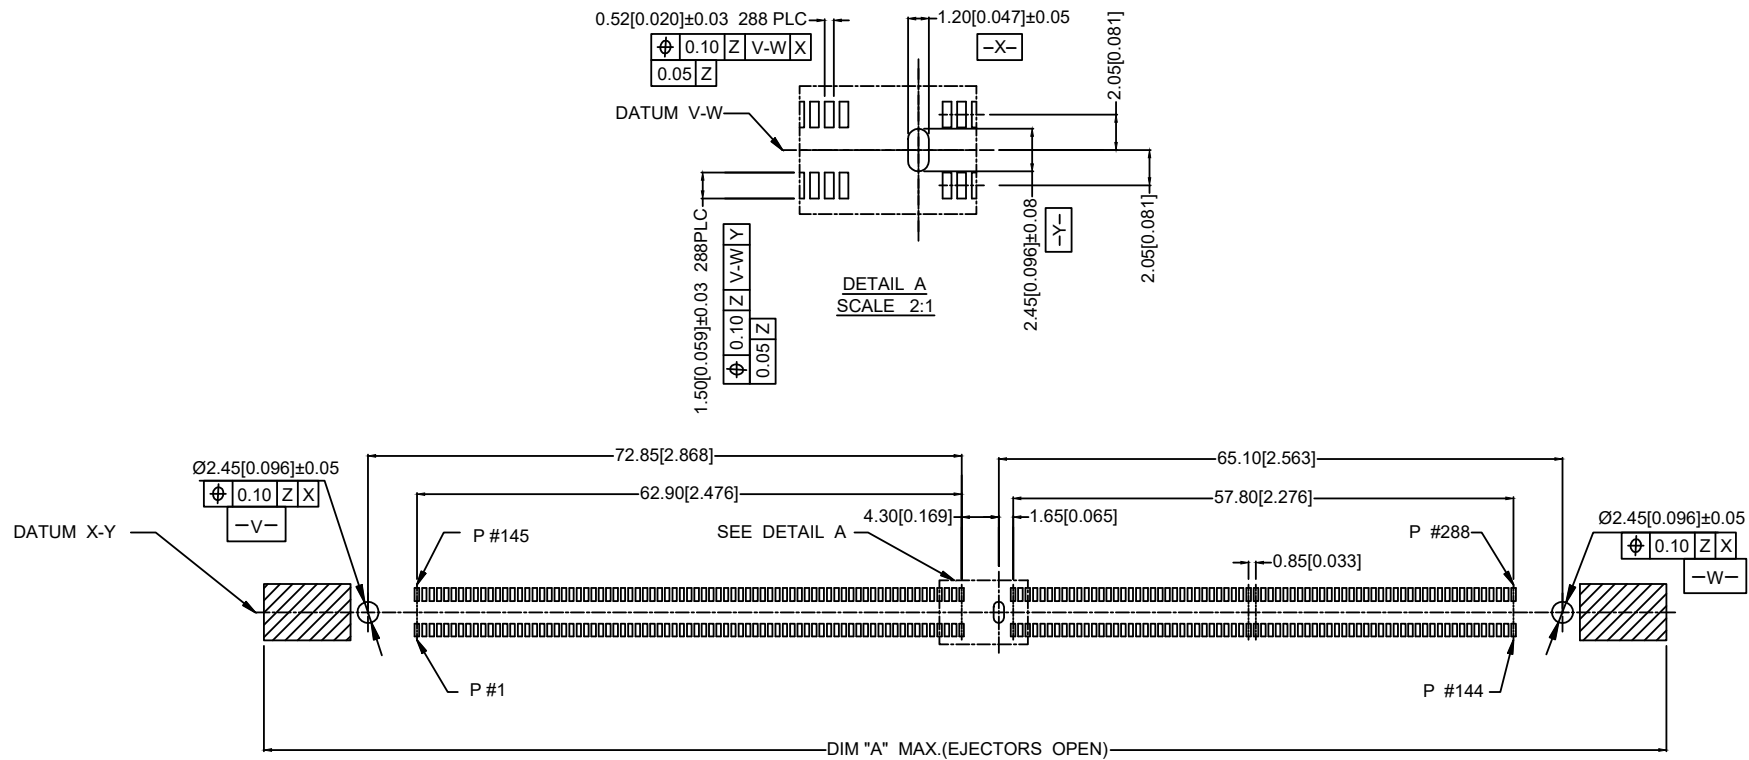


RECOMMENDED PCB LAYOUT (TOP VIEW)
FOR 3 BOARDLOCKS

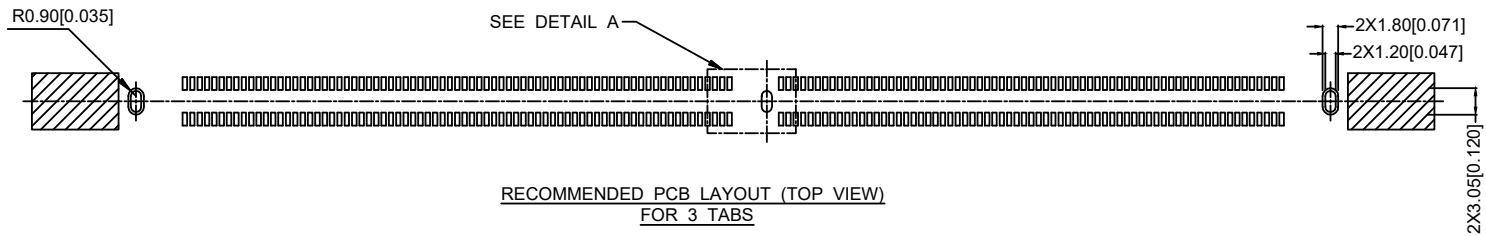

RECOMMENDED PCB LAYOUT (TOP VIEW)
FOR 3 TABS

-Z-

						DSND		SCALE: N/A	MODEL TYPE:			
Δx					ANGLAR		DWN	VIEW: 	PART NO.:			
Δx					L≤ 4		±0.2	CHKD	UNIT: mm/in	X9413WVS-288T2-9TV15		
Δx					4<L≤ 16		±0.3			DWG NO.:		
Δx					16<L≤ 63		±0.4					
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5	APPD	SIZE: A4	X-X9413WVS-288T2-9TV15			
REVISIONS					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn											1/1	A0

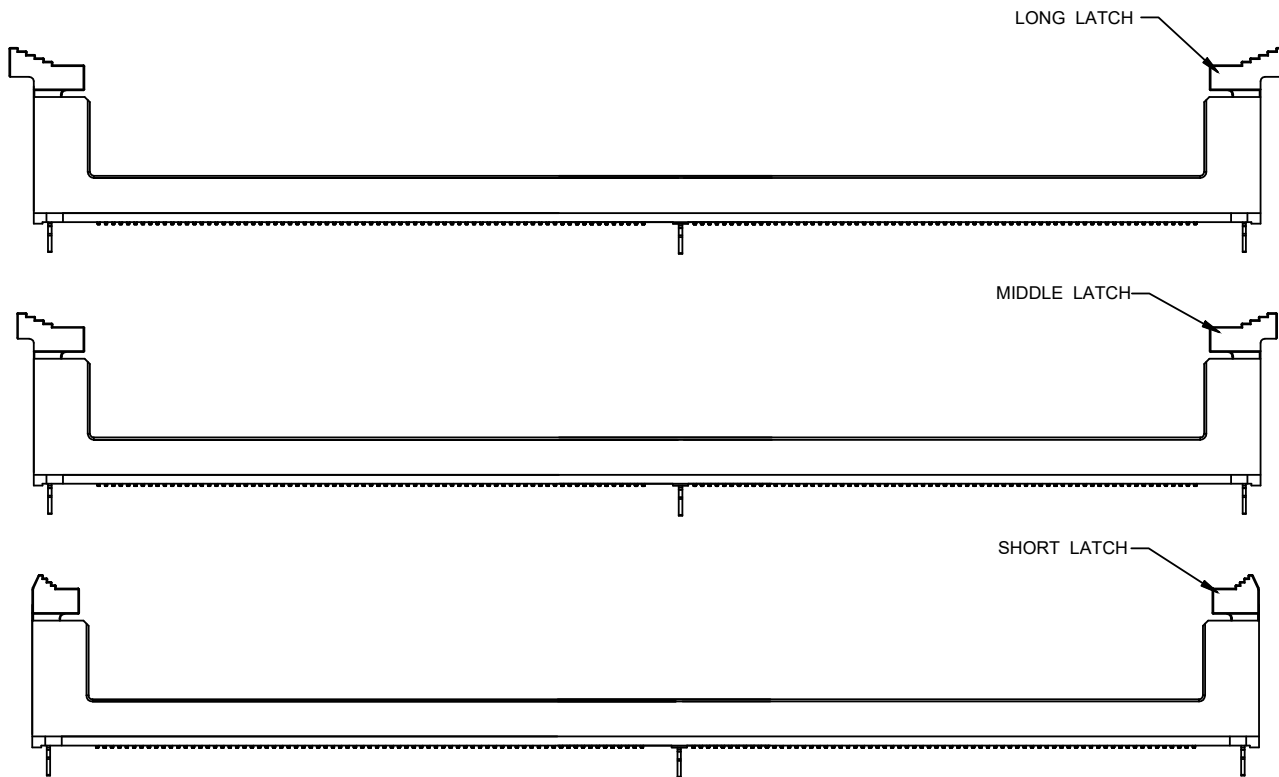

21.75	20.70	147.30	162.00	LONG
21.00	20.30	142.35	156.00	MIDDLE
20.50	20.20	140.80	152.00	SHORT
DIM.D	DIM.C	DIM.B±0.30	DIM.A	LATCH TYPE

X9413 W V S - 288 T 2 -9T V15
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- 1.Series Nunber
- 2.Terminal form: W-Wafer
- 3.Welding Board Angle : V-Stright Angle 180°
- 4.Welding Way:S-SMT
- 5.No.of Pins: XX-288 Pin
- 6.Board Lock Type: B-Board Locks Type;T-TAB type
- 7.Latch Type: 1.short latch;2.long latch;3.middle Latch
- 8.Special No:M-With Mylar ; Blank-without Mylar
- 9.latchPlastic material: PA46 /PA9T UL94V-0
- 10.Contact Plating:V01-Gold Flash
V15-Gold 15u"
V30-Gold 30u"

NOTES 注释:

1. MATERIAL材料:

- 1.1 HOUSING外壳: HIGH PERFORMANCE RESINS, GLASS FILBER,UL94V-0;COLOR:SEE PART NO.
- 1.2 LATCH锁: HIGH PERFORMANCE RESINS, GLASS FILBER, UL94 V-O, COLOR: SEE PART NO.
- 1.3 CONTACTS触点: COPPER ALLOY.
- 1.4 BOARDLOCK针脚: STAINLESS STEEL.
- 1.5 TABS标签: STAINLESS STEEL.

2. FINISH饰面:

2.1 CONTACT触点:

[SEE PART NO..] GOLD PLATING ON THE CONTACT AREA.

2.54um [100u"] MIN. MATTE-TIN PLATING ON THE SOLDERING AREA

1.27um [50u"] MIN. NICKEL UNDERPLATING OVERALL.

							DSND		SCALE: N/A	MODEL TYPE:			
					ANGLAR	±5°		DWN		VIEW: 	PART NO.:		
ΔX					L≤ 4	±0.2					X9413WVS-288T2-9TV15		
ΔX					4<L≤ 16	±0.3					DWG NO.:		
ΔX					16<L≤ 63	±0.4			CHKD		UNIT: mm/in	X-X9413WVS-288T2-9TV15	
MARK		DESCRIPTION	DATE	REVISED	APPROVED	L> 63		±0.5	APPD		SIZE: A4		
REVISIONS							UNSPECIFIED TOLERANCES						
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn							XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION	
											1/1	A0	