
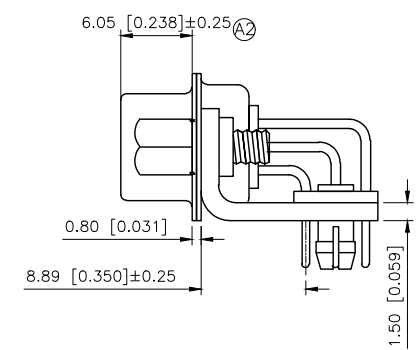


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.12	阿树
A2	ECN-P-2025110504	A2X6	产品尺寸及电气性能变更	2025.11.05	阿树

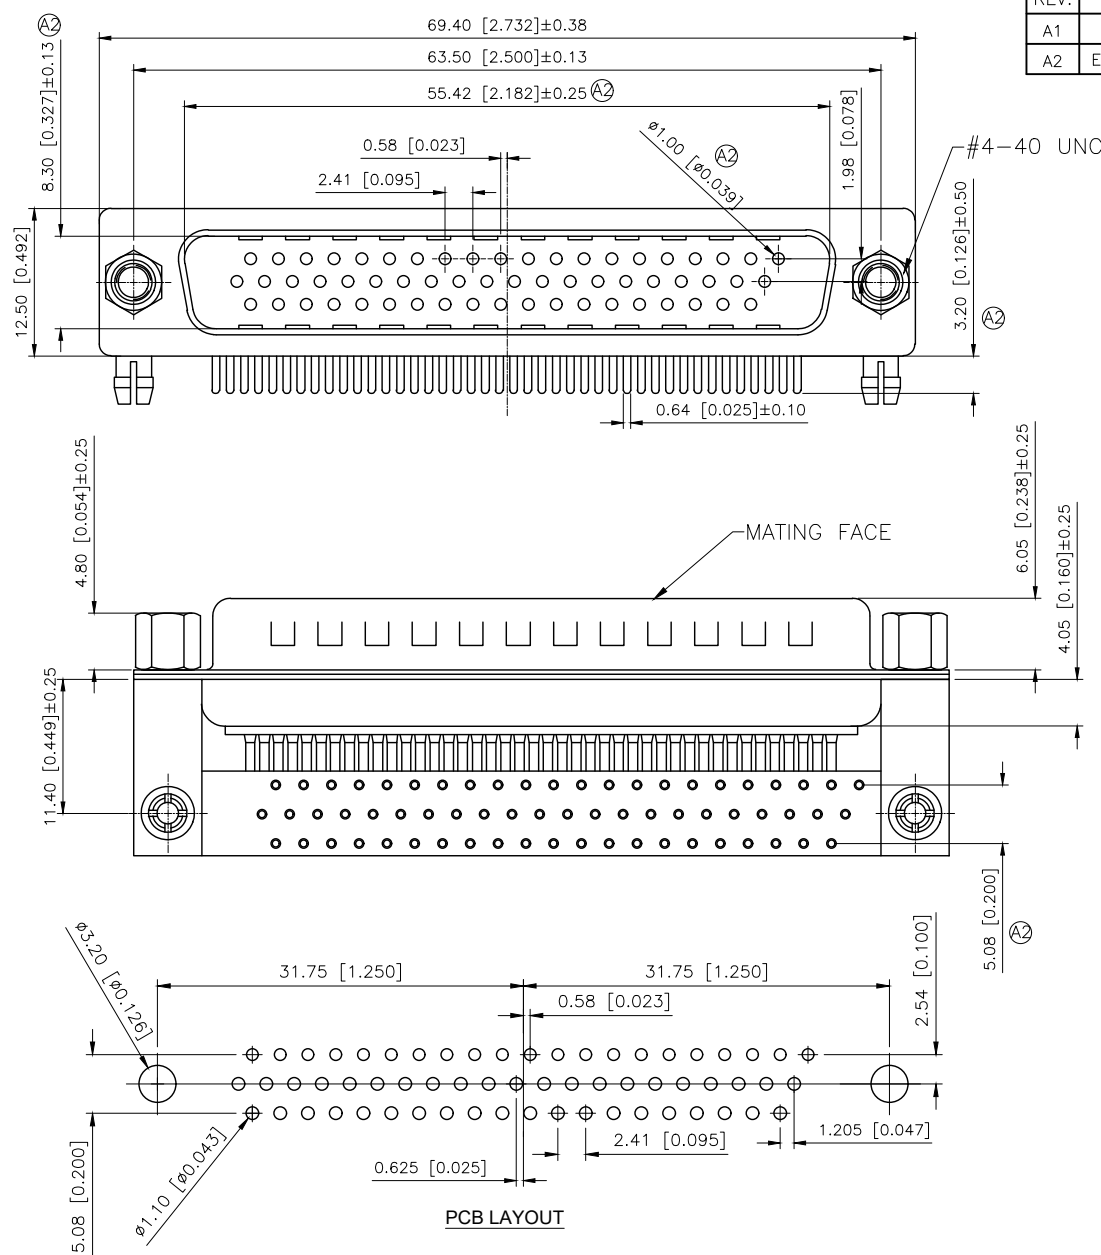

Specifications:
规格:
Current rating:5A AC/DC
额定电流: 5A AC/DC
Voltage rating:500V AC
额定电压: 500V AC
Withstanding voltage:1000V AC/MIN
耐受电压: ≥1000V AC/分钟
Temperature range:-55℃~+105℃
温度范围: -55℃~+105℃
Insulation resistance:5000MΩMIN
绝缘电阻: ≥5000MΩ
Contact resistance:30mΩMAN
接触电阻:≤30mΩ
Material And FINISHED:
材料和成本:
INSULATOR:PBT+30% GLASS FILLED UL 94V-0
绝缘体: PBT+30% 玻璃填充 UL 94V-0
SHELL: Steel Plated Tin
外壳: 钢 镀锡
CONTACT MATERIAL:Brass
触点材料: 黄铜
CONTACT FINISH:FULL GOLD FLASH
触点电镀: 镀金


PART NO.:

X06 62 F C 2 B 2
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Pin No.:62PIN
- ③Welding Board Angle :F-Female
- ④C: Car-pin
- ⑤Planting Category:
1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:AuSn
- ⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
- ⑦1:TYPE-1; 2:TYPE-2

铆合方式	TYPE-1: 铆合	TYPE-2: 铆合锁螺丝
图式		

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

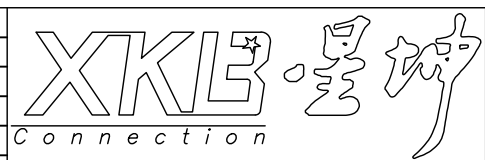

DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0662FC2B2
APPROVED		SIZE: A4	DWG NO.: X-X0662FC2B2