

SAW Components

SAW Duplexer

Cellular / LTE / Band 5

Series/type: QGSA836MBASP3

Ordering code: QGSA836MBASP3

Date: October 2021

Version: 1.0



These materials, including the information contained herein, may be used only for informational purposes by the customer. QuantGrav assume no responsibility for errors or omissions in these materials or the information contained herein. QuantGrav reserve the right to make changes to the product(s) or information contained herein without notice. The materials and information are provided on an AS IS basis, and QuantGrav assume no liability and make no warranty or representation, either expressed or implied, with respect to the materials, or any output or results based on the use, application, or evaluation of such materials, including, without limitation, with respect to the non-infringement of trademarks, patents, copyrights or any other intellectual property rights or other rights of third parties.

No use of this documentation or any information contained herein grants any license, whether express, implied, by estoppel or otherwise, to any intellectual property rights, including, without limitation, to any patents owned by Hubei QuantGrav Technology Co., Ltd.

Not to be used, copied, reproduced, or modified in whole or in part, nor its contents revealed in any manner to others without the express written permission of Hubei QuantGrav Technology Co., Ltd.

QuantGrav is trademarks of Hubei QuantGrav Technology Co., Ltd., registered in the people's Republic of China.

Contents

1 Applications	3
2 Features	3
3 Package	4
4 Pin configuration	4
5 Matching circuit	5
6 Absolute Maximum Ratings	5
7 Characteristics	6
7.1 TX-ANT	6
7.2 ANT-RX	7
7.3 TX-RX	7
8 Transmission coefficients	8
9 Soldering profile	10
10 Tape and Reel	11
10.1 Tape	11
10.2 Reel with diameter of 178 mm	11

1 Applications

- Multimode SAW duplexer for mobile telephone Cellular / LTE / WCDMA Band 5 systems
- Low Insertion Attenuation
- Low Amplitude Ripple





Figure 1: Picture of component with example of product marking.

2 Features

- Package size 1.8 mm x 1.4 mm
- Package height 0.6 mm (max.)
- RoHS compatible
- Package for Surface Mount Technology (SMT)
- Ni/Au-plated terminals
- Electrostatic Sensitive Device (ESD)
- Moisture Sensitivity Level 3 (MSL3)

3 Package

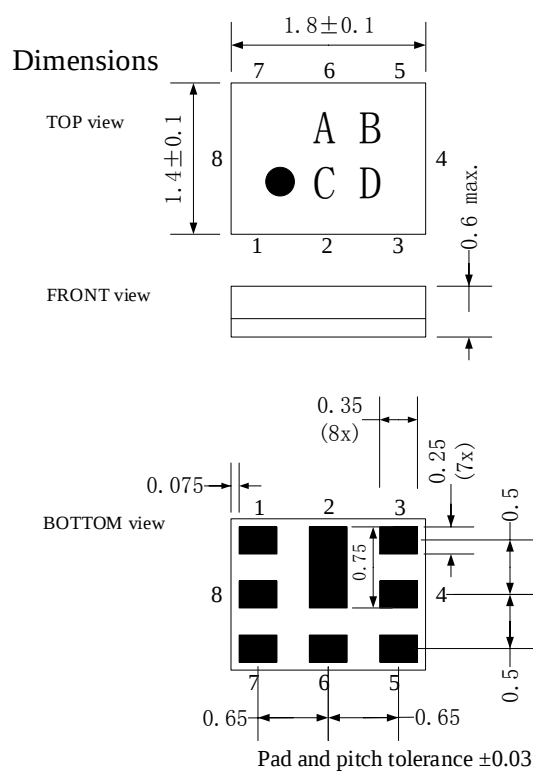

Land Pattern

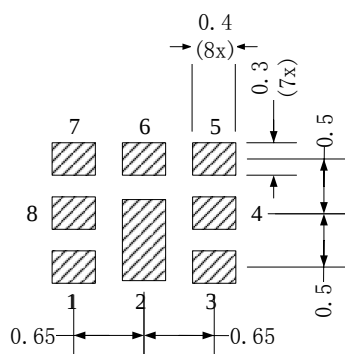


Figure 2: Drawing of package with package height A = 0.6 mm (max.)

4 Pin configuration

- 1 Rx
- 3 Tx
- 6 ANT
- 2,4,5,7,8 Ground

5 Matching circuit

- $R_1 : 50\Omega$ $R_2 : 50\Omega$ $R_3 : 50\Omega$
- $L_{p1} : 8.2nH$ $L_{p2} : NC$ $L_{p3} : 25nH$

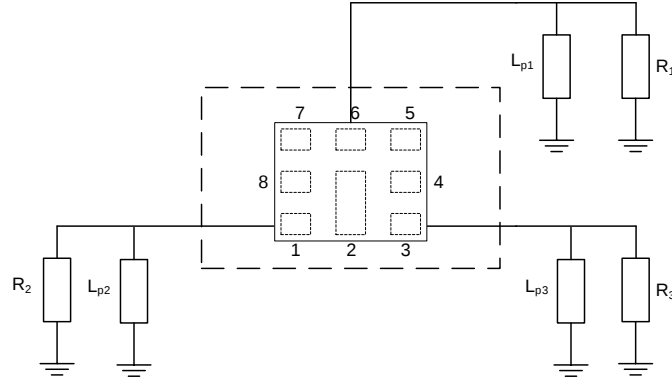


Figure 3: Schematic of matching circuit.

6 Absolute Maximum Ratings

Table 1: Absolute Maximum Ratings of Example Data Sheet

Parameter	Rating
Storage temperature	$T_{STG} = -40^{\circ}C$ to $+85^{\circ}C$
DC voltage	$V_{DC} = 3.0V(max)$
Input power ¹	$P_{IN} = +30dBm$ 5000h $+55^{\circ}C$

¹Input signal shall be applied to Terminal number(1).

7 Characteristics

Temperature range for specification $T_{SPEC} = -20^{\circ}C \dots +85^{\circ}C$

ANT terminating impedance $Z_{ANT} = 50\Omega$ with par. L_{p1}

RX terminating impedance $Z_{RX} = 50\Omega$ with par. L_{p2}

TX terminating impedance $Z_{TX} = 50\Omega$ with par. L_{p3}

7.1 TX-ANT

Item		min.	typ.	max.	Unit	Note
Center Frequency		836.5			MHz	
Insertion Loss	824 to 849 MHz		1.6	2.2	dB	
Ripple Deviation	824 to 849 MHz		0.7	1.3	dB	
VSWR	824 to 849 MHz		1.5	2.0		TX
	824 to 849 MHz		1.5	2.0		ANT
Absolute Attenuation	450 to 804 MHz	30	35		dB	
	860 to 869 MHz	5	10		dB	
	869 to 894 MHz	44	56		dB	
	1559 to 1606 MHz	30	33		dB	
	1638 to 1708 MHz	29	32		dB	
	1606 to 1805 MHz	25	32		dB	
	1845 to 1920 MHz	26	30		dB	
	1920 to 1980 MHz	26	30		dB	
	2110 to 2170 MHz	26	30		dB	
	2400 to 2496 MHz	26	30		dB	
	3286 to 3406 MHz	5	12		dB	
	4110 to 4255 MHz	5	10		dB	
	4900 to 5950 MHz	3	10		dB	

7.2 ANT-RX

Item		min.	typ.	max.	Unit	Note
Center Frequency		881.5			MHz	
Insertion Loss	869 to 894 MHz		1.6	2.2	dB	
Ripple Deviation	869 to 894 MHz		0.7	1.0	dB	
VSWR	869 to 894 MHz		1.5	2.0		ANT
	869 to 894 MHz		1.5	2.0		RX
Absolute Attenuation	450 to 824 MHz	40	51		dB	
	824 to 849 MHz	45	58		dB	
	849 to 854 MHz	30	56		dB	
	909 to 979 MHz	12	19		dB	
	1693 to 1743 MHz	40	60		dB	
	1710 to 1785 MHz	50	60		dB	
	1850 to 1920 MHz	40	60		dB	
	1920 to 1980 MHz	40	55		dB	
	1980 to 2400 MHz	35	55		dB	
	2400 to 2500 MHz	40	53		dB	
	3476 to 3576 MHz	35	50		dB	
	4345 to 4470 MHz	35	59		dB	
	4900 to 5950 MHz	37	47		dB	

7.3 TX-RX

Item	Tx to Rx	min.	typ.	max.	Unit	Note
Isolation	824 to 849 MHz	54	57		dB	
	869 to 894 MHz	52	55		dB	

8 Transmission coefficients

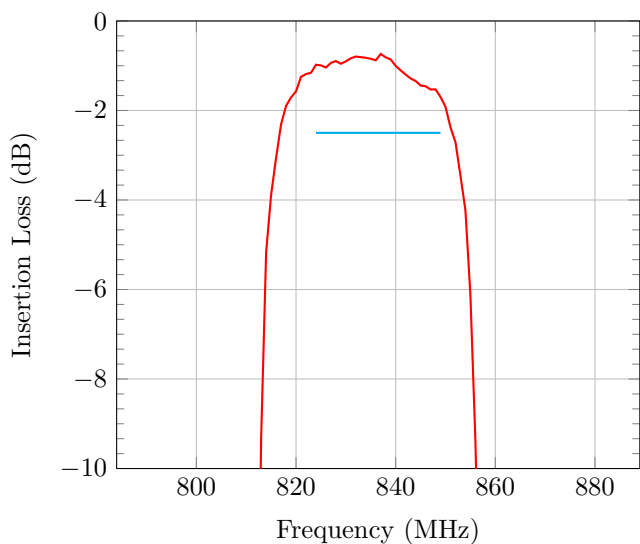


Figure 4: Tx-Ant Insertion Loss

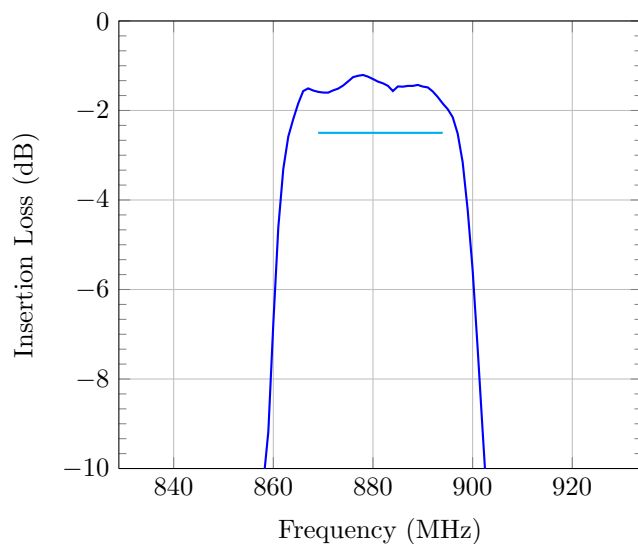


Figure 5: Ant-Rx Insertion Loss

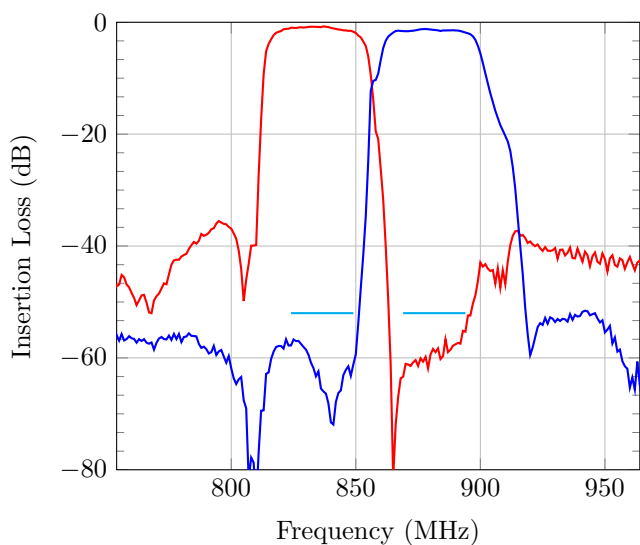


Figure 6: Tx Rejection in Rx Band and Rx Rejection in Tx Band

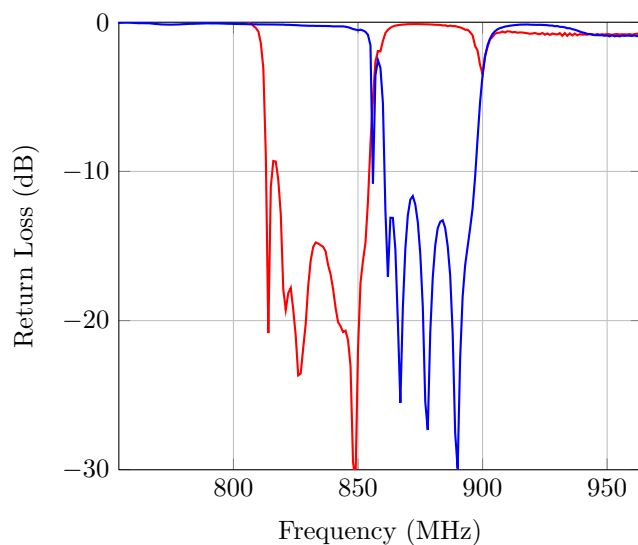


Figure 7: Tx and Rx Port Return Loss

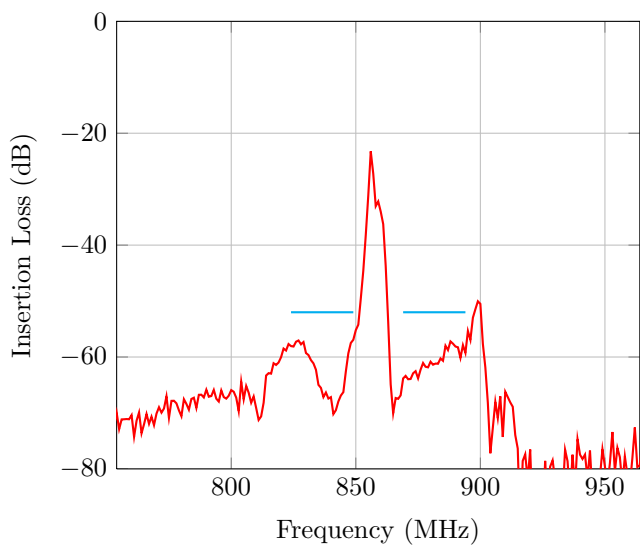


Figure 8: Tx-Rx Isolation

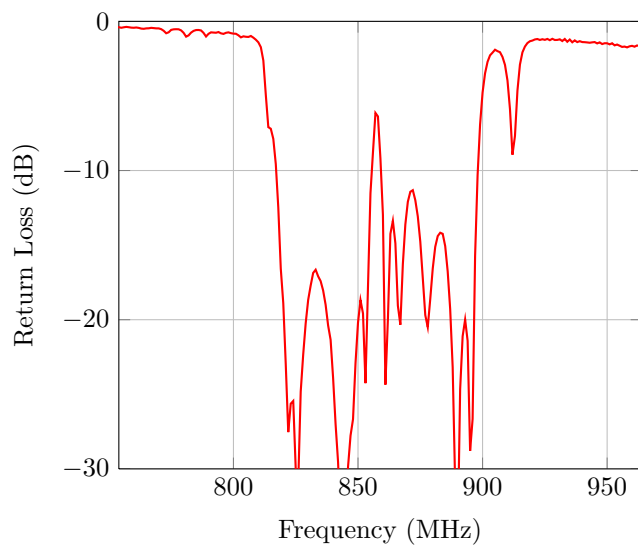


Figure 9: Antenna Port Return Loss

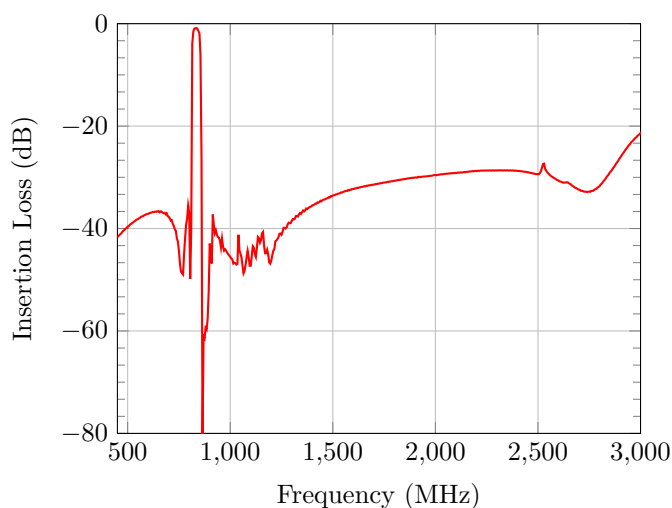


Figure 10: Tx-Ant Wideband Insertion Loss

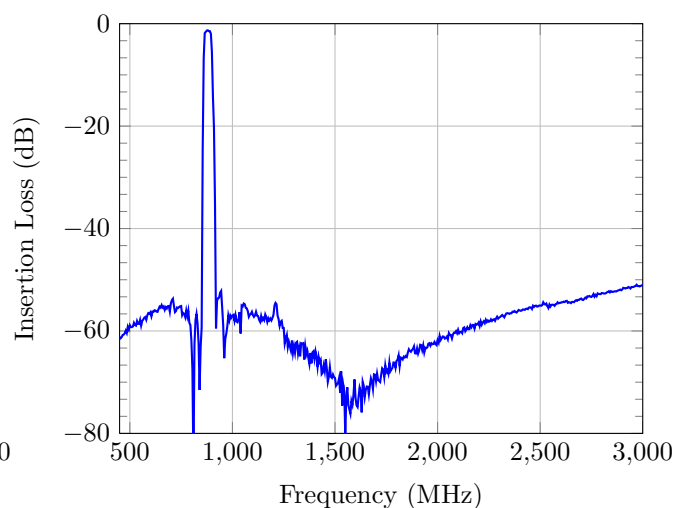
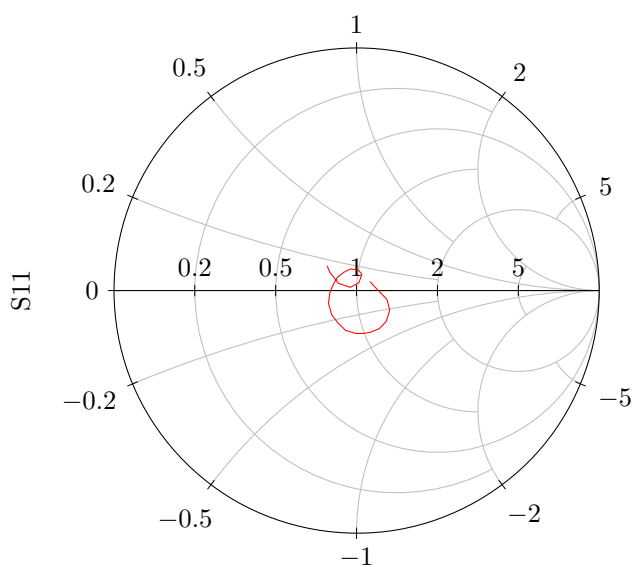
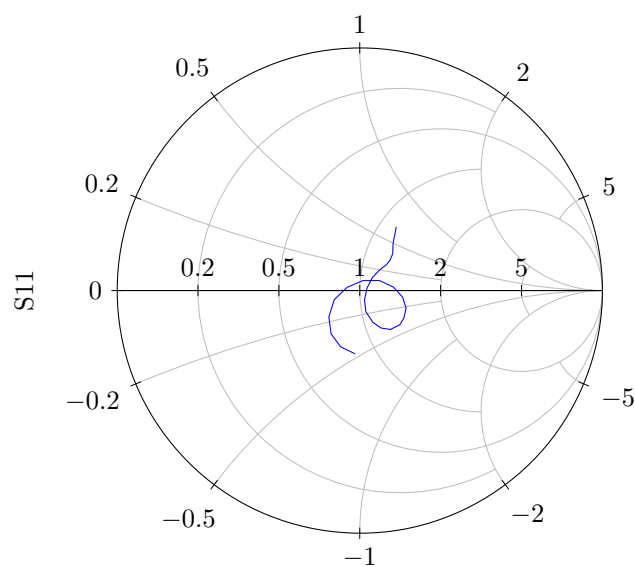
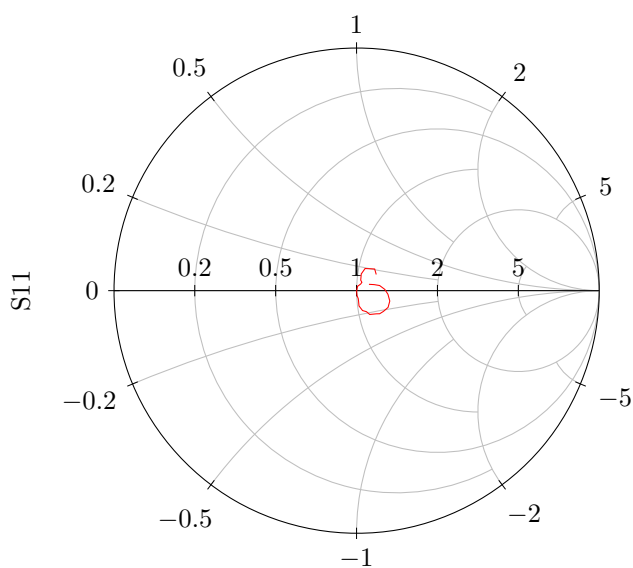
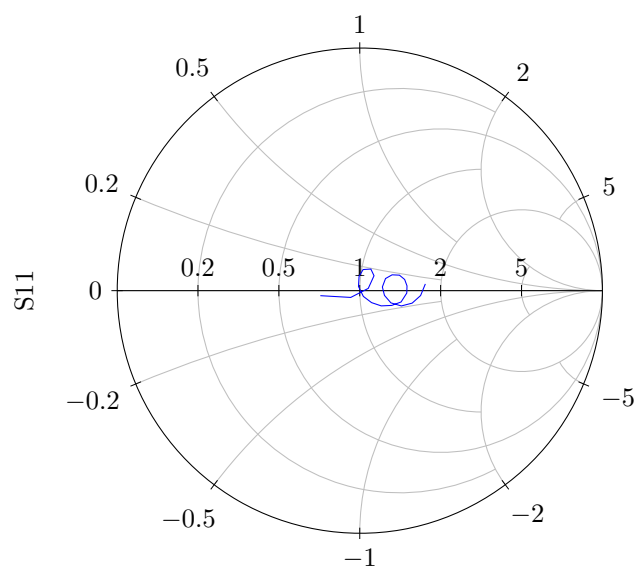


Figure 11: Ant-Rx Wideband Insertion Loss

Figure 12: Tx Port Impedance in Tx Band ($Z_0 = 50\Omega$)Figure 13: Rx Port Impedance in Rx Band ($Z_0 = 50\Omega$)Figure 14: Ant Port Impedance in Tx Band ($Z_0 = 50\Omega$)Figure 15: Ant Port Impedance in Rx Band ($Z_0 = 50\Omega$)

9 Soldering profile

The recommended soldering process is in accordance with IEC 60068-2-58-3rd edit and IPC/JEDECJ-STD-020B.

Table 2: Characteristics of recommended soldering profile for lead-free solder (Sn95.5Ag3.8Cu0.7).

Parameter	Rating
Ramp rate	≥ 3 K/s
Preheat	125 °C to 220 °C, 150 s to 210 s, 0.4 K/s to 1.0 K/s
T >220 °C	30 s to 70 s
T >230 °C	Min. 10 s
T >245 °C	Max. 20 s
T $\leq$ 255 °C	-
Peak temperature T_{peak}	220 °C $\pm$ 5°C
Wetting temperature T_{min}	230 °C $\pm$ 5°C for 10s $\pm$ 1s
Cooling rate	≥ 3 K/s
Soldering temperature T	Measured at solder pads

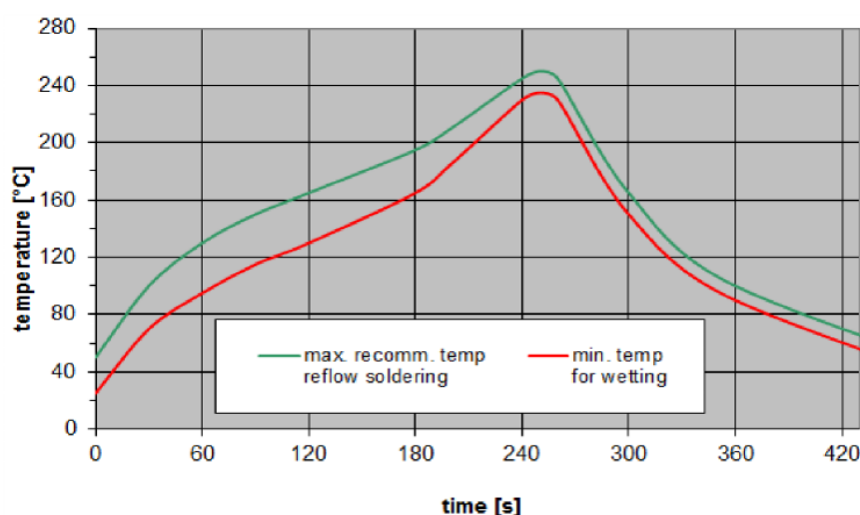


Figure 16: Drawing of reel (Recommended reflow profile for convection and infrared soldering – lead-free solder)

10 Tape and Reel

10.1 Tape

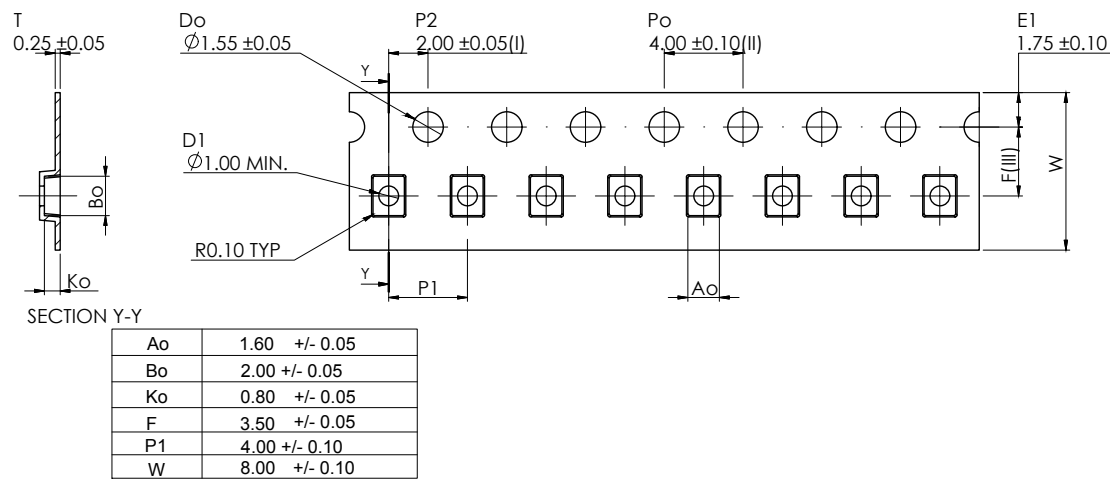


Figure 17: Drawing of tape (first-angle projection) with tape dimensions

10.2 Reel with diameter of 178 mm

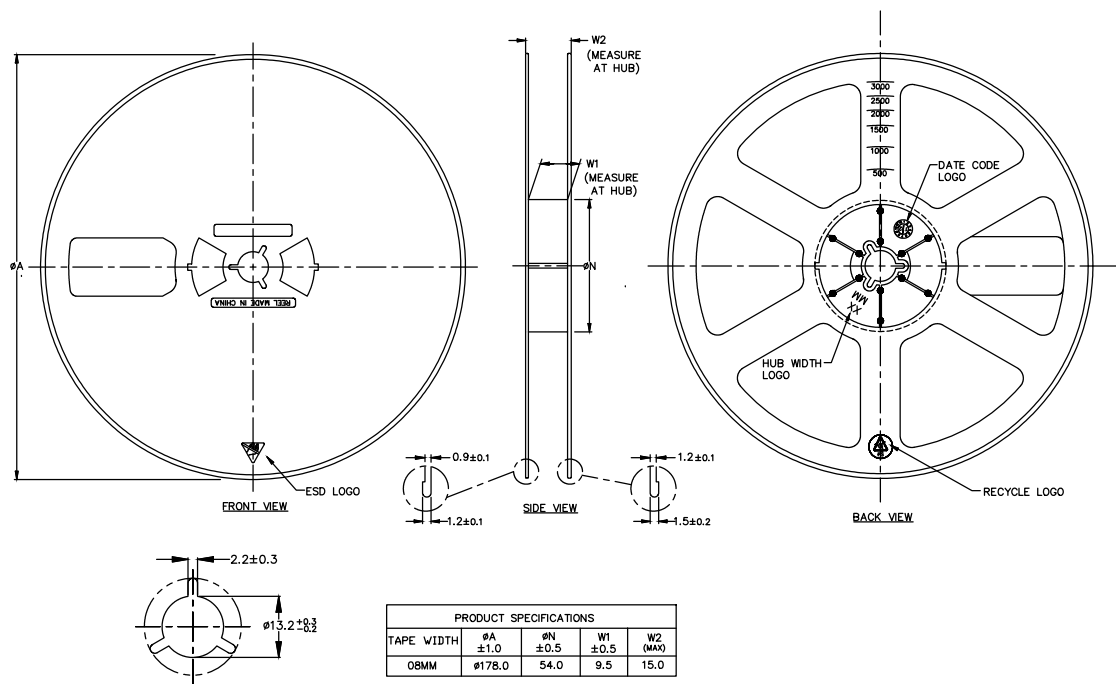


Figure 18: Drawing of reel (first-angle projection) with diameter of 180 mm