
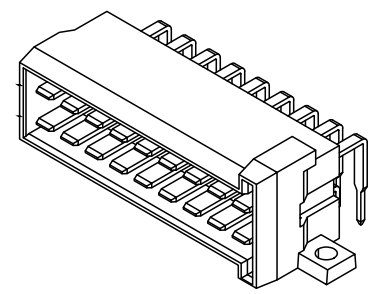
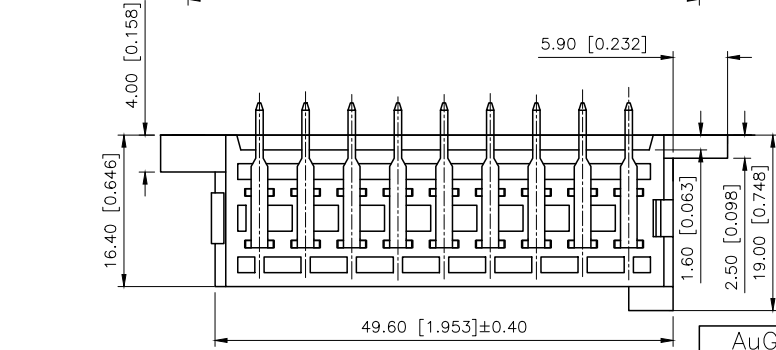
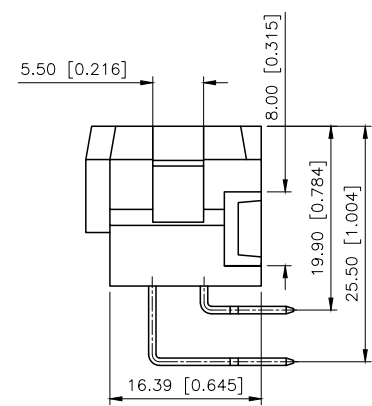
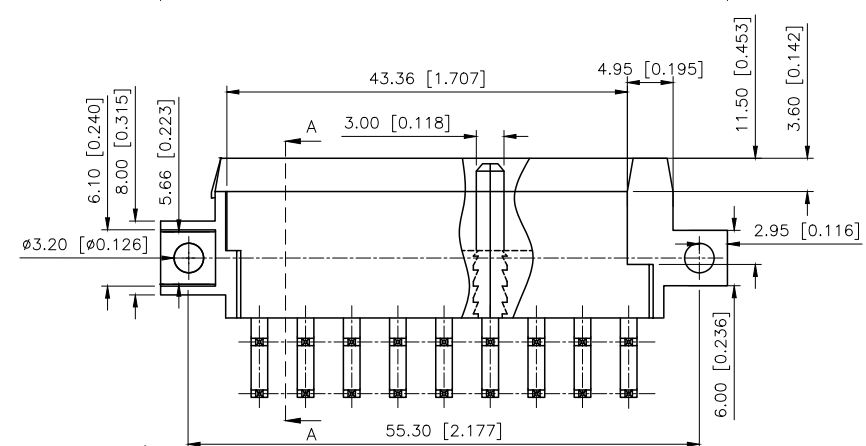
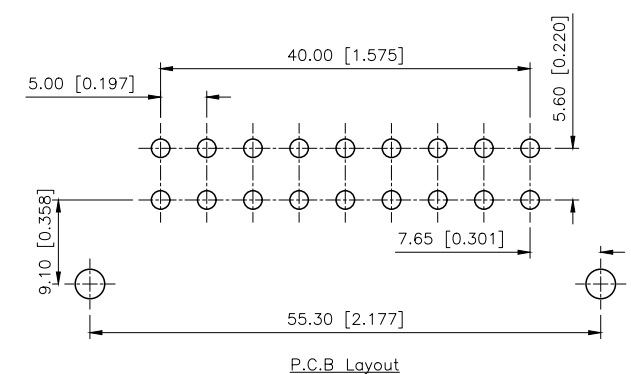
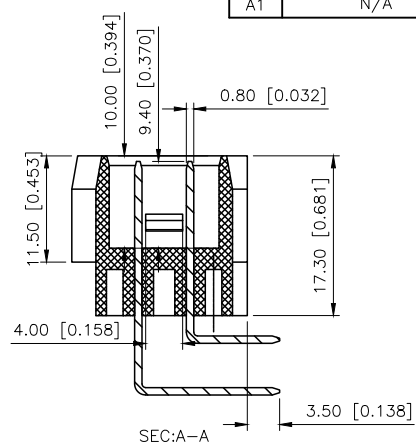


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.24	阿树

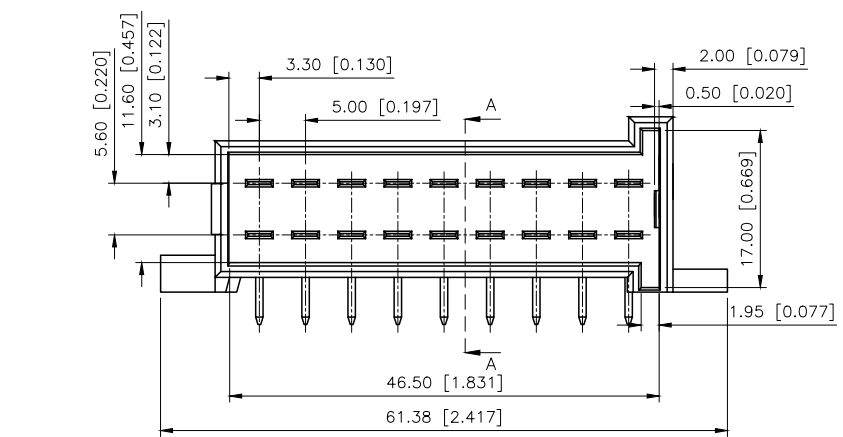

Current rating:25A AC/DC
额定电流: 25A AC/DC
Temperature range:-40℃-+125℃
温度范围: -40℃-+125℃

PART NO.:
K 828801 W R-2x09-PT SN
① ② ③ ④ ⑤ ⑥ ⑦
①K:XKBTEK-Car Connector
②XKB Series No
③Category:W-Wafer
④Welding Board Rangle:R-Stright 90°
⑤Row No.Pin No:2x09 Pin
⑥Material:PT-PBT+GF15+GF30
⑦Palting:SN-Plated Tin

K828801WR-2x09-PTS	PBT	Brass	K828801H
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	5.00mm Automobile connector
CHECKED		UNIT:	mm/in	PART NO.:	K828801WR-2x09-PTS
APPROVED		SIZE:	A4	DWG NO.:	