

Pitch:1.27mm(0.05") 0.40 SQ Pin
Pin Header Single Row S.M.T Type

ELETE
—Professional Connecting Solution—
HMISVXX /HMISNXX




Specifications

Current Rating:1.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:300V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials

Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

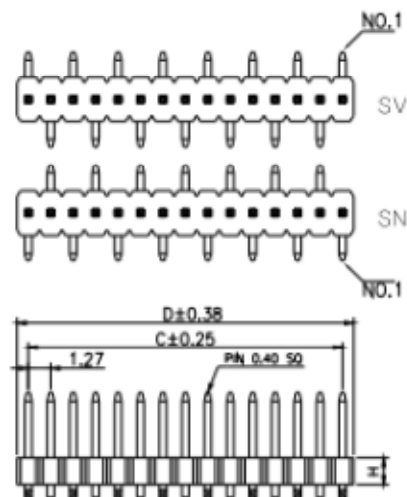

Mating with



No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	1.27	2.54	10	11.43	12.70	18	21.59	22.86	26	31.75	33.02
03	2.54	3.81	11	12.70	13.97	19	22.86	24.13	27	33.02	34.29
04	3.81	5.08	12	13.97	15.24	20	24.13	25.40	28	34.29	35.56
05	5.08	6.35	13	15.24	16.51	21	25.40	26.67	29	35.56	36.83
06	6.35	7.62	14	16.51	17.78	22	26.67	27.94	30	36.83	38.10
07	7.62	8.89	15	17.78	19.05	23	27.94	29.21	31	38.10	39.37
08	8.89	10.16	16	19.05	20.32	24	29.21	30.48	32	39.37	40.64
09	10.16	11.43	17	20.32	21.59	25	30.48	31.75	33	40.64	41.91