
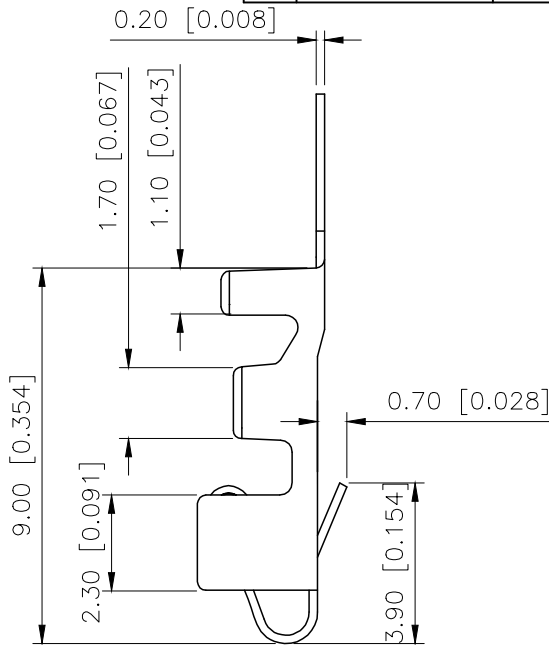


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.01	阿树

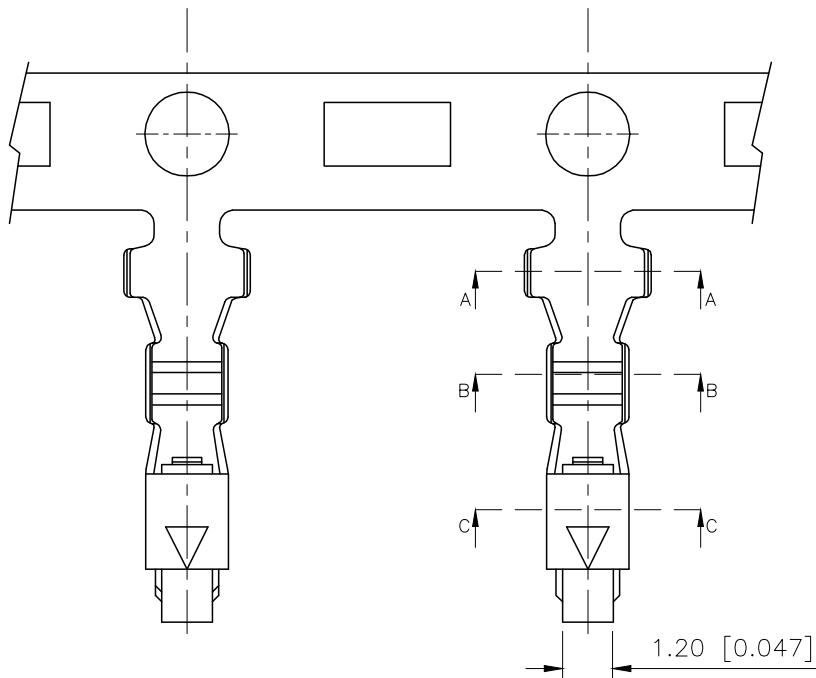


规格 Specifications:
额定电压 Votage rating:250V AC/DC
额定电流 Current rating:3A AC/DC
耐电压 Withstanding voltage:1500V AC/minute
温度区间 Temperature range:-40℃~+105℃
绝缘电阻 Insulation resistance:≥500MΩ
接触电阻 Contact resistance:≤10mΩ
环境测试后 After environmental testing:≤20mΩ


PART NO.:

X2521 I F-P SN-G
① ② ③ ④ ⑤ ⑥


- ①Series Number.
②Category: T-terminal
③Welding Board Angle: F-Female
④Material: P-Phosphor bronze
⑤Plating Category:SN-Bright Tin Plating
⑥G:mating-G



SECTION:A-A
SCALE:1:1

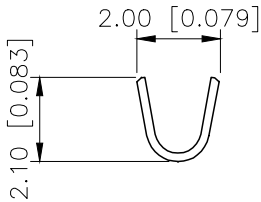

SECTION:B-B
SCALE:1:1

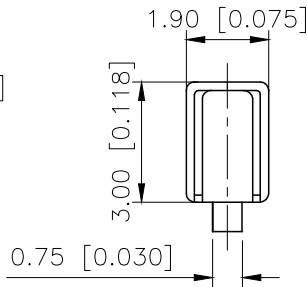

SECTION:C-C
SCALE:1:1

X2521TF-PSN-G	Phosphor Bronze	AWG#22-28	X2521HM
PART NO	Material	Wire Range	Suitable XKB Housing
DESIGN	阿树	VIEW:	MODEL TYPE: 2.50mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2521TF-PSN-G
APPROVED		SIZE: A4	DWG NO.: X-X2521TF-PSN-G
SCALE			PAGE
N/A			1/1
REVISION			A1

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



Connection

XKB INDUSTRIAL PRECISION CO.,LIMITED