

General Specifications

Electrical Capacity (Resistive Load)

Logic Level: 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
See Supplement section to find explanation of operating range

Other Ratings

Contact Resistance: 80 milliohms maximum
Insulation Resistance: 100 megohms minimum @ 500V DC
Dielectric Strength: 500V AC minimum for 1 minute minimum
Mechanical Life: 30,000 cycles minimum
Electrical Life: 10,000 cycles minimum
Nominal Operating Torque: .026Nm (.234 lb•in) for momentary action models
.020Nm (.182 lb•in) for maintained action models
Contact Timing: Break-before-make
Angle of Throw: 90° for 2-position & 45° for 3-position

Materials & Finishes

Boot: Polyvinyl chloride
Key: Brass alloy with bright nickel plating;
brass alloy with bright nickel plating & ABS resin handle
Tumbler Barrel: Polyacetal
Bushing: Zinc alloy with nickel plating
Bracket: Steel with tin plating
Base: Glass fiber reinforced polyamide
Movable Contactor: Beryllium copper with gold plating
Stationary Contacts: Copper with gold plating
Terminals: Brass with tin plating

Environmental Data

Operating Temperature Range: -25°C through +70°C (-13°F through +158°F)
Humidity: 90 ~ 95% humidity for 240 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

PCB Processing

Soldering: Wave Soldering recommended: See Profile B in Supplement section.
Manual Soldering: See Profile B in Supplement section.
Cleaning: Automated cleaning. Boot must be on switch during processing.
See Cleaning specifications in Supplement section.

Standards & Certifications

These SK Series devices have not been tested for UL recognition or CSA certification.
These switches are designed for use in a low-voltage, low-current, logic-level circuit.
When used as intended in a logic-level circuit, the results do not produce hazardous energy.

Distinctive Characteristics

Sealed body construction plus disposable boot protect contacts and allow automated processing.

Molded-in terminals seal out flux, solvents, and other contaminants.


Short body size for space-saving, behind panel dimensions.

Detent mechanism, with its spring-operated steel ball, gives crisp, positive action for accurate switch setting.


Bifurcated, self-wiping contact mechanism provides unequalled logic-level reliability and smoother, positive detent actuation.

Crimped bracket legs ensure secure PCB mounting and prevent dislodging during automated wave soldering.

.100" x .100" (2.54mm x 2.54mm) terminal spacing conforms to standard PC board grid spacing.

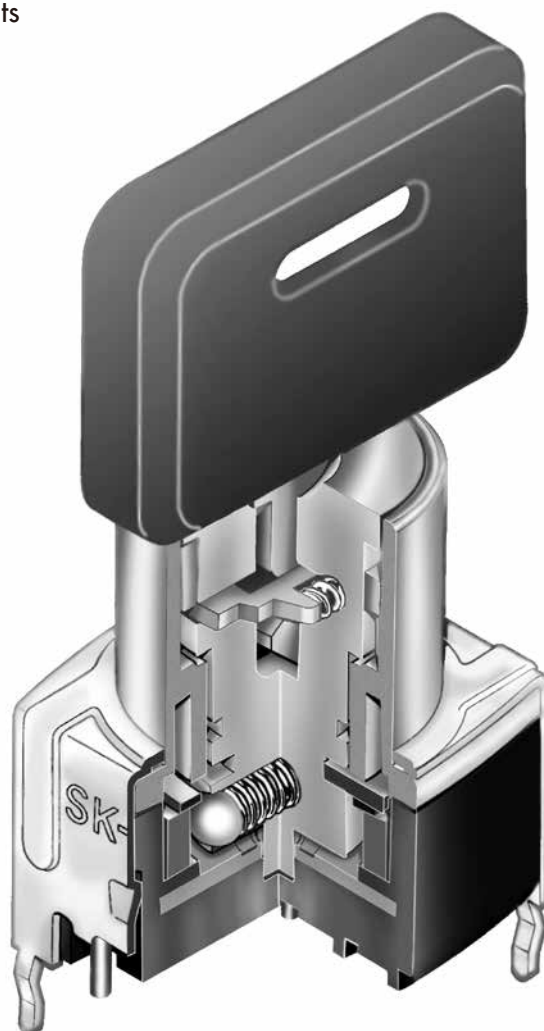

Actual Size

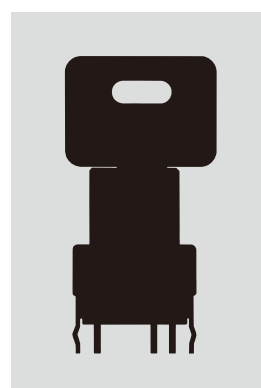

TYPICAL SWITCH ORDERING EXAMPLE

SK

2

4E

G

30

Poles	
1	SPDT SP3T
2	DPDT DP3T

Contact Material	
G	Gold Rated 0.4VA @ 28V AC/DC

Circuits & Key-Removable Positions				
Code	Pos. 1	Pos. 2	Pos. 3	Key Removes
2A	ON	NONE	ON	Positions 1 and 3
2B	ON	NONE	ON	Position 1
5B	ON	NONE	(ON)	Position 1
*4D	ON	ON	ON	Positions 1, 2, 3
*4E	ON	ON	ON	Position 2

() = Momentary
*Can be used as ON-OFF-ON circuit

PC Terminals	
13	Straight with Bracket
30	Right Angle

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

SK24EG30



Toggle

Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch

Indicators

Accessories

Supplement

POLES, CIRCUITS & KEY-REMOVABLE POSITIONS									
Pole & Throw	Model	Key Positions			Connected Terminals (Terminal numbers are not on switch)			Schematic	● = Key Removable ● = Not Removable ✓ = Maximum Arc
		Pos 1	Pos 2	Pos 3	Pos 1	Pos 2	Pos 3		
SPDT	SK12A	ON	NONE	ON	C1-1	—	C1-2		
SPDT SPDT	SK12B SK15B	ON ON	NONE NONE	ON (ON)	C1-1	—	C1-2		
DPDT	SK22A	ON	NONE	ON	C1-1 C2-4	—	C1-2 C2-5		
DPDT DPDT	SK22B SK25B	ON ON	NONE NONE	ON (ON)	C1-1 C2-4	—	C1-2 C2-5		
SP3T	SK14D	ON	ON	ON	C1-1	C1-2	C1-3		
SP3T	SK14E	ON	ON	ON	C1-1	C1-2	C1-3		
DP3T	SK24D	ON	ON	ON	C1-1 C2-4	C1-2 C2-5	C1-3 C2-6		
DP3T	SK24E	ON	ON	ON	C1-1 C2-4	C1-2 C2-5	C1-3 C2-6		

KEY REMOVABLE

- A

Positions 1 & 3
90° Angular Throw
- B

Position 1
90° Angular Throw
- D

Positions 1, 2 & 3
45° Angular Throw
- E

Position 2
45° Angular Throw

CONTACT MATERIAL & RATING

- G

Gold over Copper
- Logic Level
- 0.4VA maximum @ 28V AC/DC maximum

TERMINALS

13

Straight PC Terminals with Bracket

Double Throw Model

Three Throw Model

30

Right Angle PC Terminals

Double Throw Model



Three Throw Model

KEYS

AT4080 Standard Antistatic Plastic Handle

Brass Alloy with Bright Nickel Plating
& ABS Resin Handle

2 keys supplied with each switch

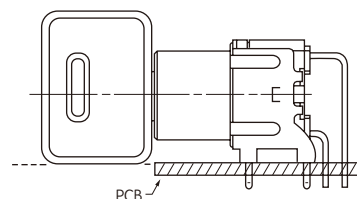



Suitable for all Straight PCB mount and for Right Angle PCB mount where clearance for key is obtainable.

AT4079 for Right Angle Mid-board Mounting (Optional) All Metal

Brass Alloy with Bright Nickel Plating

Contact factory if metal keys needed

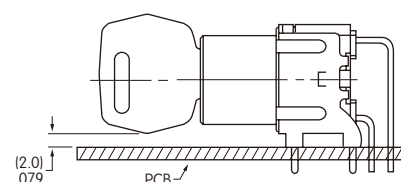

Disposable Boot



Each switch is supplied with a boot that provides protection from automated soldering and the cleaning process. Attach the boot without the key installed in the switch.



The boot is not reusable; discard after the washing procedure.

Polyvinyl Chloride




TYPICAL SWITCH DIMENSIONS

Single & Double Pole

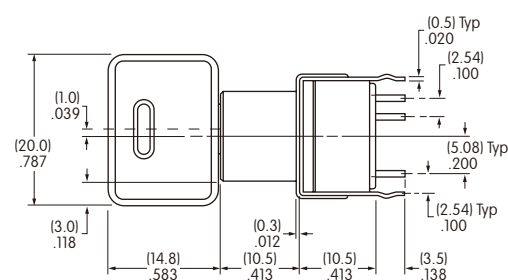



Single Pole models have only terminals 1, 2 & C1

Straight PC with Bracket • Double Throw




SK12AG13

Single & Double Pole

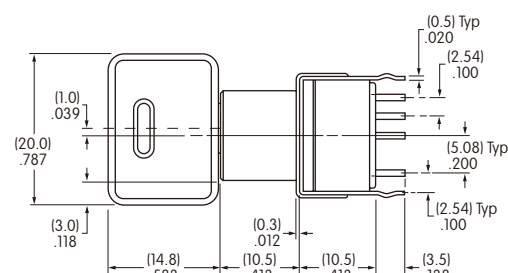

Single Pole models have only terminals 1, 2, 3 & C1


Straight PC with Bracket • Three Throw




SK24DG13

TYPICAL SWITCH DIMENSIONS


Right Angle PC Terminals Double Throw



Key in Position 1

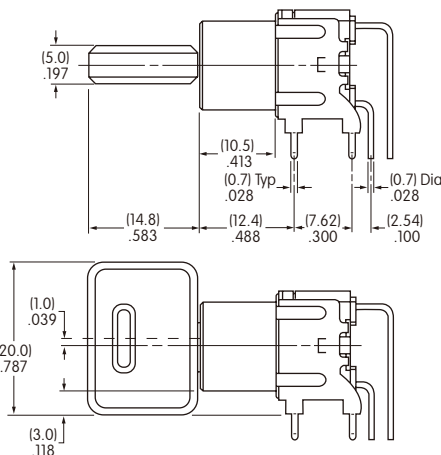


Single Pole

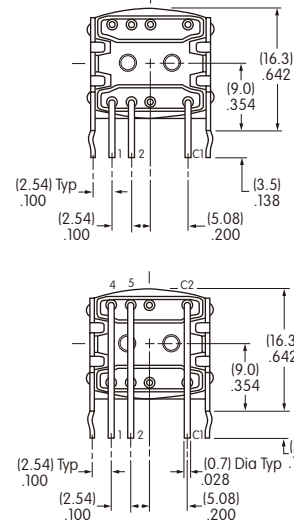


SK15BG30

Key in Position 3


Right Angle PC Terminals Three Throw



Key in Position 2

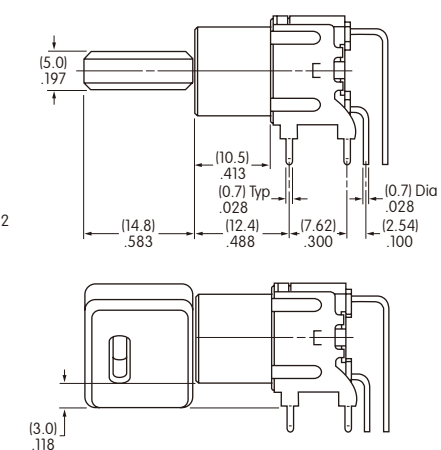




Single Pole

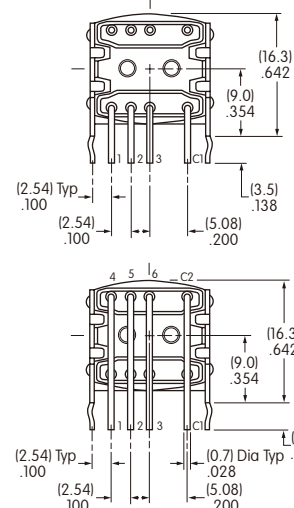





SK24EG30

Key in Position 1

Double Pole



Straight PC Footprints



Right Angle PC Footprints

