


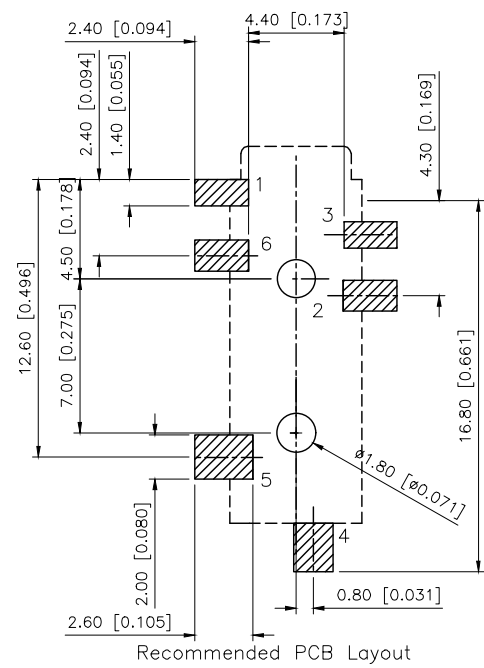
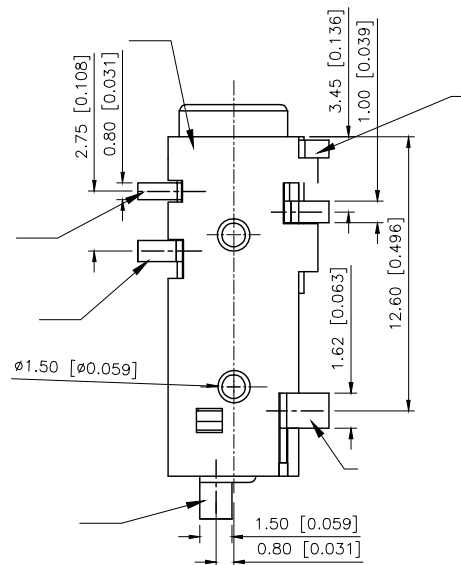


| REVISIONS |         |          |                 |            |        |
|-----------|---------|----------|-----------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION     | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE | /          | /      |
| A1        | N/A     |          |                 | 2025.10.13 |        |

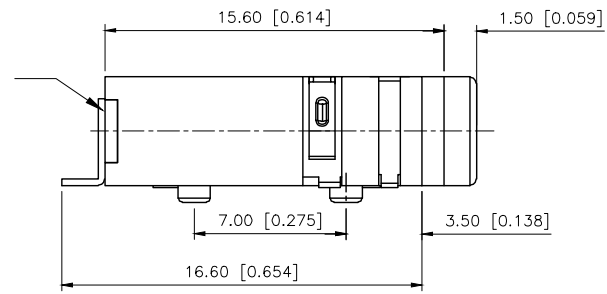

- Main technical performance
- 1. Rated electric load: 30V · 0.5A  
: 30V · 0.5A;
  - 2. Contact resistance: ≤ 0.03 Ω  
: ≤0.03Ω;
  - 3. Insulation resistance: ≥ 100m Ω  
: ≥100MΩ;
  - 4. Withstand voltage: AC500V (50Hz) / min  
: AC500V(50Hz)/min;
  - 5. Plugging force: 3 ~ 20n  
: 3~20N;
  - 6. Service life: 5000 times  
: 5,000

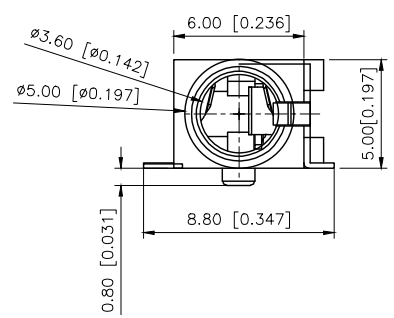

|    |               |     |                 |         |
|----|---------------|-----|-----------------|---------|
| 7  | Back cover    | 1   | PA              | Black   |
| 6  | Fixed film    | 1   | Phosphor Bronze | Ag      |
| 5  | Bending piece | 1   | Brass           | Ag      |
| 4  | Reed          | 1   | Phosphor Bronze | Ag      |
| 3  | Reed          | 2   | Phosphor Bronze | Ag      |
| 2  | Fixed film    | 1   | Brass           | Ag      |
| 1  | Pedestal      | 1   | PA              | Black   |
| NO | Name          | PCS |                 | Remarks |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



|          |  |             |                            |
|----------|--|-------------|----------------------------|
| DESIGN   |  | VIEW:       | MODEL TYPE: 3.5 PHONE JACK |
| CHECKED  |  | UNIT: mm/in | PART NO.: PJ-328B0-SMT     |
| APPROVED |  | SIZE: A4    | DWG NO.:                   |