
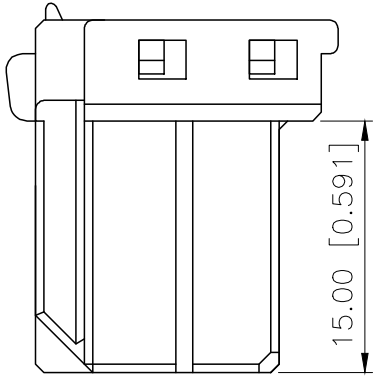
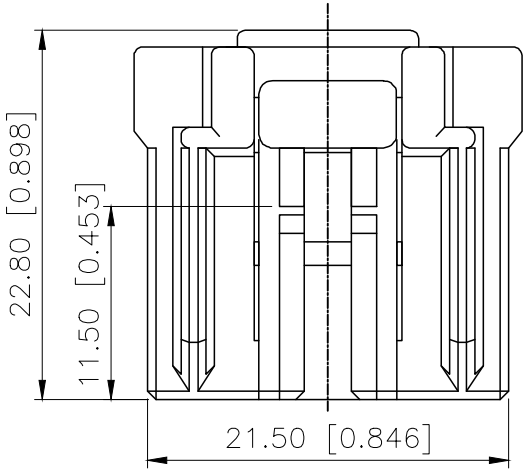


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.28	阿树

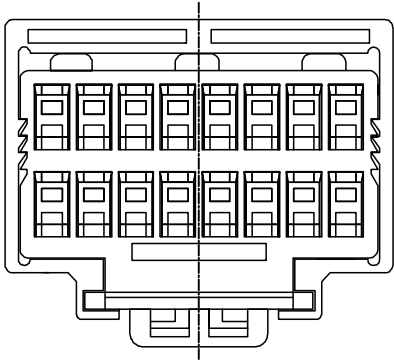


Current rating:3A AC/DC
额定电流: 3A AC/DC
Temperature range:-40℃-+125℃
温度范围: -40℃-+125℃

PART NO.:

K 175977 H-2x08-N0
① ② ③ ④ ⑤

- ①K:XKBTEK-Car Connector
②XKB Series No
③Category:H-Housing
④Row No.Pin No:2x08 Pin
⑤Material:N0-PA66 UL94V-0

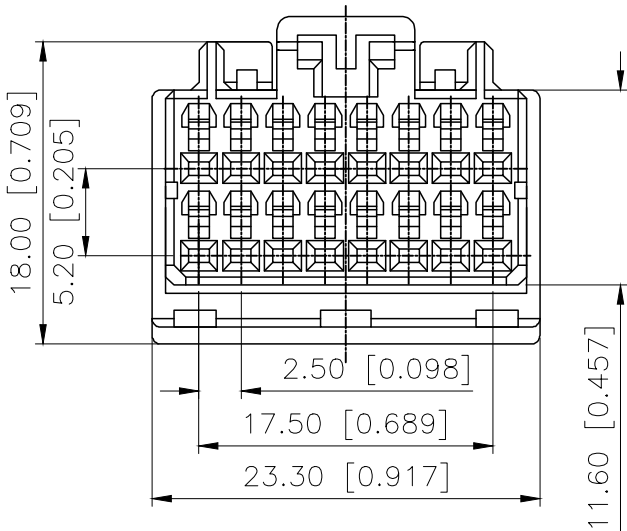

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



K175977H-2xXX-N0	PA66	K175977W	K175977T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal
DESIGN	阿树	VIEW:	MODEL TYPE: 2.5mm Automobile connector
CHECKED		UNIT: mm/in	PART NO.: K175977H-2x08-N0
APPROVED		SIZE: A4	DWG NO.:
SCALE			PAGE
N/A			1/1
REVISION			A1