
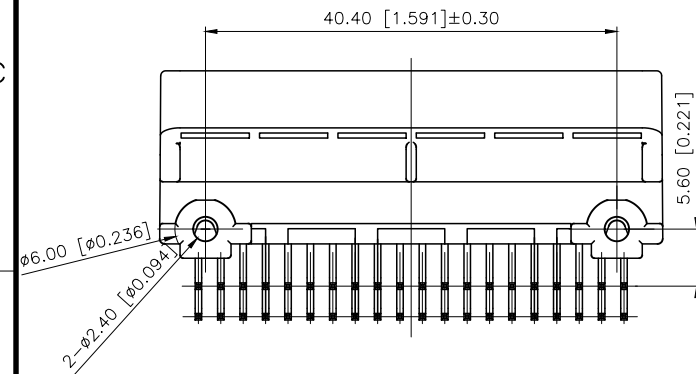
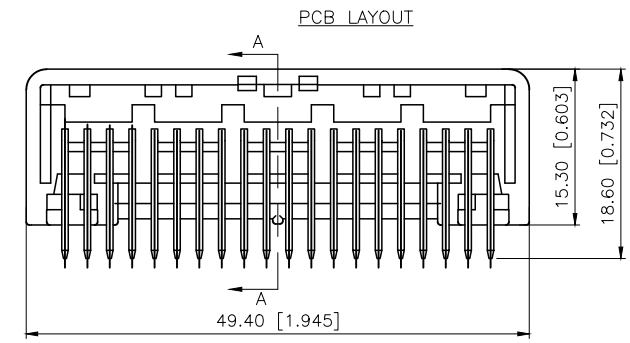
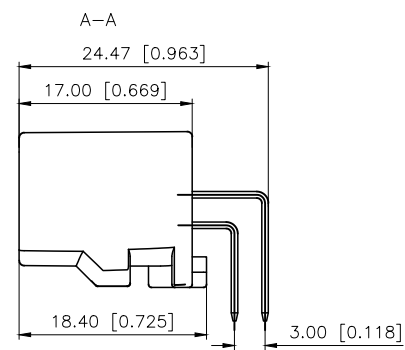
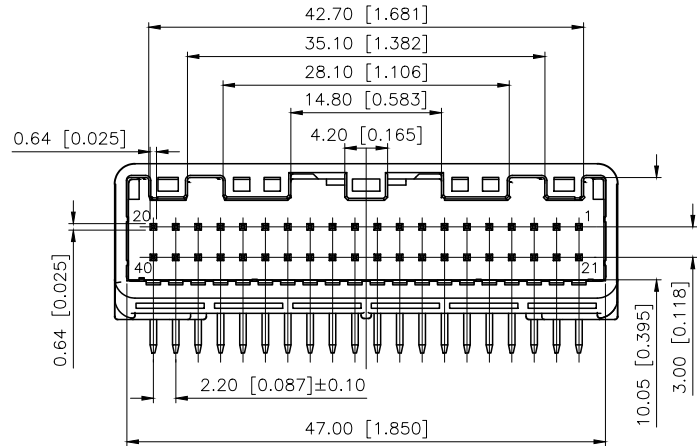
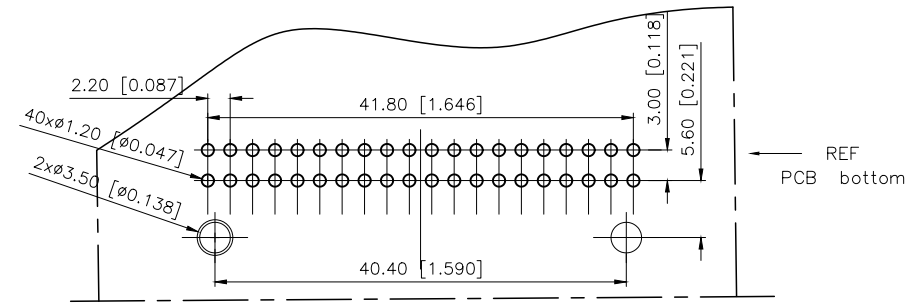
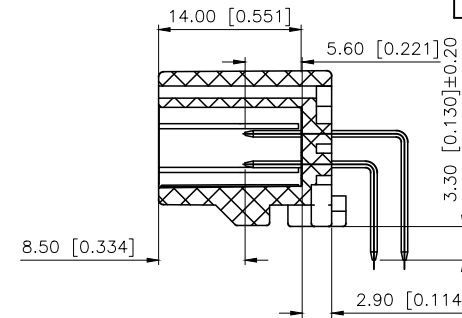


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		引脚配合PCB板长度变更	2024.8.10	阿树

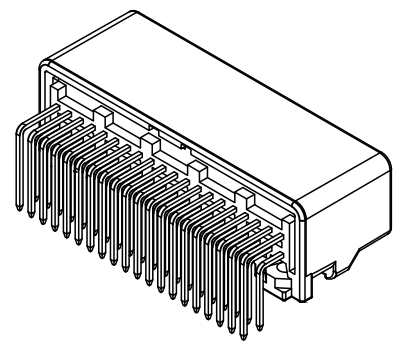


Current rating:3.2A AC/DC
额定电流: 3.2A AC/DC
Temperature range:-45℃~+125℃
温度范围: -45℃~+125℃
Insulation resistance:>100MQ;
绝缘电阻:>100MQ;

- PART NO.:
K 137635 W R-2x20-PT SN W
① ② ③ ④ ⑤ ⑥ ⑦ ⑧
- ①K:XKBTEK-Car Connector
②XKB Series No
③Category:W-Wafer
④Welding Board Rangle:R-Stright 90°
⑤Row No.Pin No:2xXX-2x20 Pin
⑥Material:PT-PBT
⑦Palting:SN-Plated Tin
⑧Color:B-Black ; W-White

K137635WR-2x20-PTS	W	R	2x20	PT	SN	W
①	②	③	④	⑤	⑥	⑦
PART NO		Material	Material(Pin)	Suitable XKB Housing		

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	

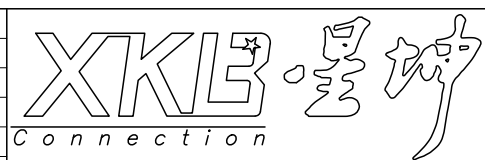

DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE: 2.2mm Automobile connector		
PART NO.: K137635WR-2x20-PTS		
DWG NO.: X-K137635WR-2x20-PTS		
SCALE	PAGE	REVISION
N/A	1/1	A1