

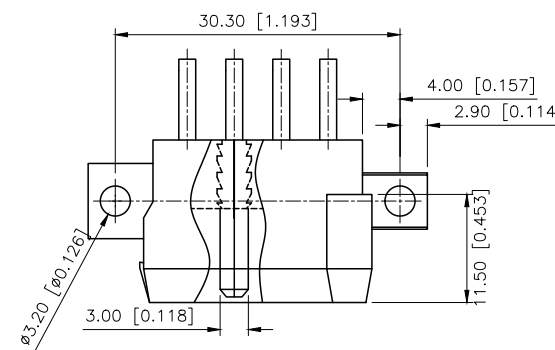
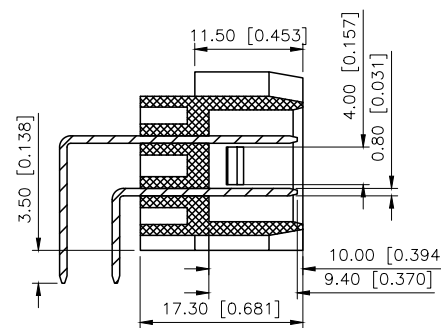
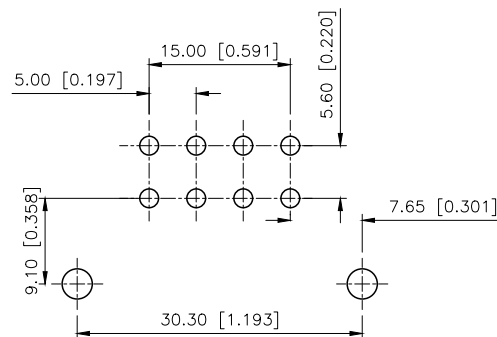
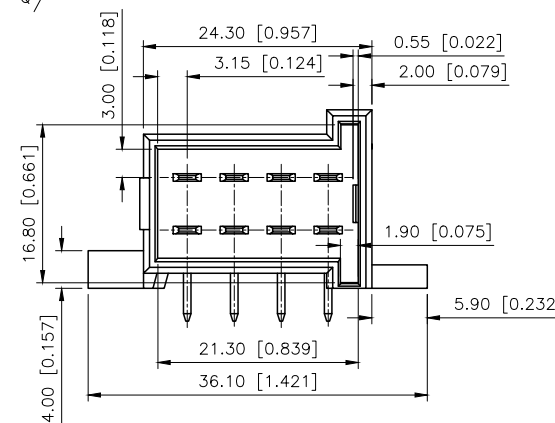


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.24	阿树

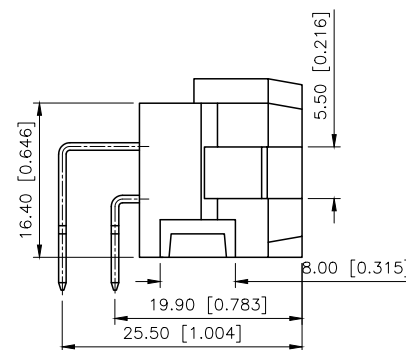



Current rating: 25A AC/DC
额定电流: 25A AC/DC
Temperature range: -40°C - +125°C
温度范围: -40°C - +125°C

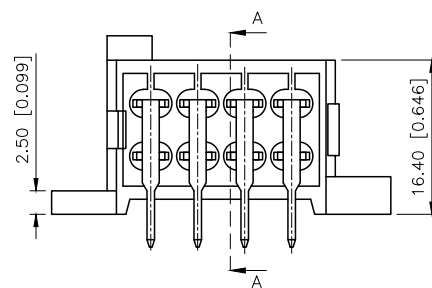

PART NO.:

K 828801 W R-2x04-PT SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①K:XKBTEK—Car Connector
②XKB Series No
③Category:W—Wafer
④Welding Board Rangle:R—Stright 90°
⑤Row No.Pin No:2x04 Pin
⑥Material:PT—PBT+GF15+GF30
⑦Palting:SN—Plated Tin

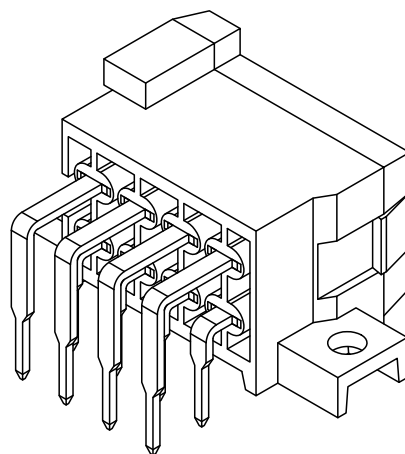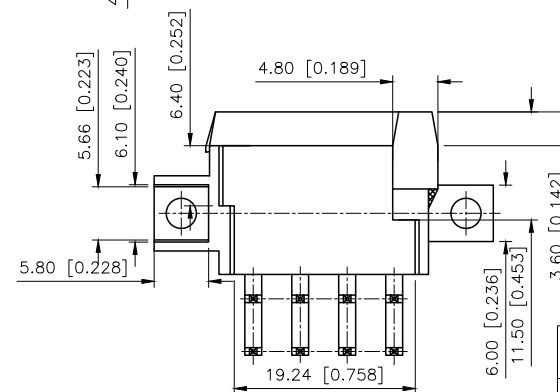

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW: 	MODEL TYPE: 5.00mm Automobile connector
CHECKED		UNIT: mm/in	PART NO.: K828801WR-2x04-PTSN
APPROVED		SIZE: A4	DWG NO.:

K828801WR-2x04-PTSN	PBT	Brass	K828801H
PART NO	Material	Material(Pin)	Suitable XKE Housing

SCALE	PAGE	REVISION
N/A	1/1	A1

XKB INDUSTRIAL PRECISION CO.,LIMITED