





REV	ECN	CONTENT	CHECK	DATE
V0.0		初版发行	LJ	2019.01.13
V1.0		整理图纸	WL	2020.06.03



IP与2P无10G0, 且只有平台底座规格






DIM A	长针
凸台底座	3.65
平台底座	3.80

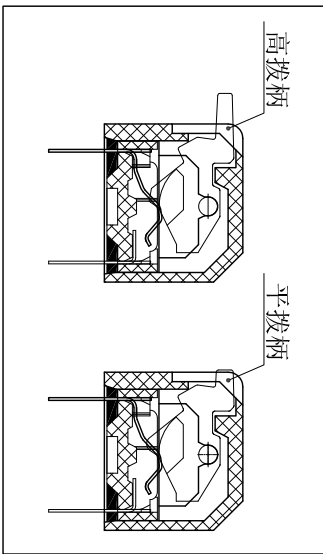


- 技术要求:
- 额定电流:
25mA, 24VDC (开与关切换时)
100mA, 50VDC (开与关不切换时)
 - 接触阻抗:
≤50mΩ (初始), ≤100mΩ (寿命测试后)
 - 绝缘电阻: ≥100MΩ / 500 VDC
 - 耐电压: 500VAC / 1minute
 - 拨动力: 1000g max
 - 机械寿命: ≥2000 cycles
 - 使用温度: -40℃ ~ +85℃
 - 存储温度: -40℃ ~ +85℃
 - 符合RoHS要求

焊接说明:
手工焊接: 30W电烙铁, 320±5℃, 3S max
波峰焊接: 250±10℃, 5S max
焊接前保持开关在“OFF”状态

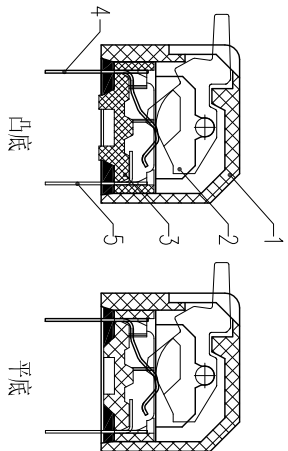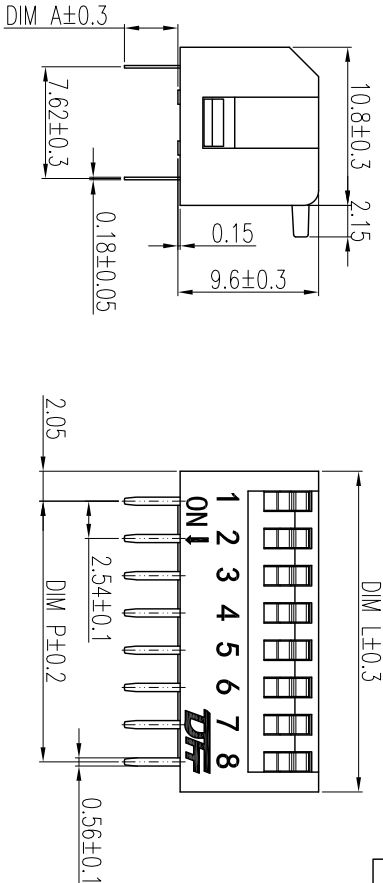

(1,2,...,10,11,12POS AVAILABLE)

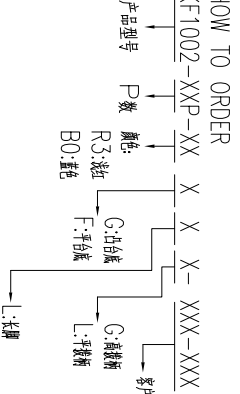

General tolerance in mm	radii and chamfers	shorter angle side	=	—	//
-------------------------	--------------------	--------------------	---	---	----

over	over	over	over	over	over	over	over	over	up	over	over	over	over	over	over
0	3	6	30	120	400	0.5	3	6	to	to	to	all	0	100	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
3	6	30	120	400	1000	3	6	10	50	120	100	150			
±0.15	±0.2	±0.25	±0.3	±0.5	±0.8	±0.2	±0.5	±1.0	±1°	±30°	±20°	0.5	0.2	0.3	0.5

POLES	DIM P	DIM L	5	PIN2	/	P	铜合金	镀金
1	/	4.11	4	PIN1	/	P	铜合金	镀金
2	2.54	6.65	3	底座	/	1	工程塑料	UL94V-0
3	5.08	9.19	2	拔柄	/	P	工程塑料	UL94V-0
4	7.62	11.73	1	外壳	/	1	工程塑料	UL94V-0
5	10.16	14.27	序号	零件名称	零件编码	数量	材质	备注
6	12.70	16.81	APP.	DATE: 2020.6.3	NAME	KF1002-XXP-XXXLX-DFT-XXX		
7	15.24	19.35	CHK.	DATE: 2020.6.3				
8	17.78	21.89	DWG.	DATE: 2020.6.3	DWGNO.	W20000021		
9	20.32	24.43	UN	SHEET	1/1	PROJECTION-METHOD		

