

Features

- Output Current in Excess of 1.5 Ampere
- Output Adjustable between 1.2 V and 37 V
- Internal Thermal Overload Protection
- Internal Short - Circuit Current Limiting Constant with Temperature
- Output Transistor Safe-Area Compensation
- Floating Operation for High Voltage Applications
- Standard 3-lead Transistor Packages
- Eliminates Stocking Many Fixed

General Description


The CBM317 is adjustable 3-terminal positive voltage regulator capable of supplying in excess of 1.5 A over an output voltage range of 1.25 V to 37 V. These voltage regulator is exceptionally easy to use and require only two external resistors to set the output voltage. Further, it employ internal current limiting, thermal shutdown and safe area compensation, making them essentially blow-out proof.

The CBM317 serve a wide variety of applications to make a programmable output regulator, or by connecting a fixed resistor between the adjustment and output, the CBM317 series can be used as a precision current regulator.

CATALOG

Features.....	
General Description.....	
Pin Configuration.....	1
Pin Assignment.....	1
Standard application.....	2
Maximum ratings.....	2
Electrical characteristics.....	3
Package Information.....	5
TO-252-3.....	5
TO-263-3.....	6
Package/Ordering Information.....	7


Pin Configuration

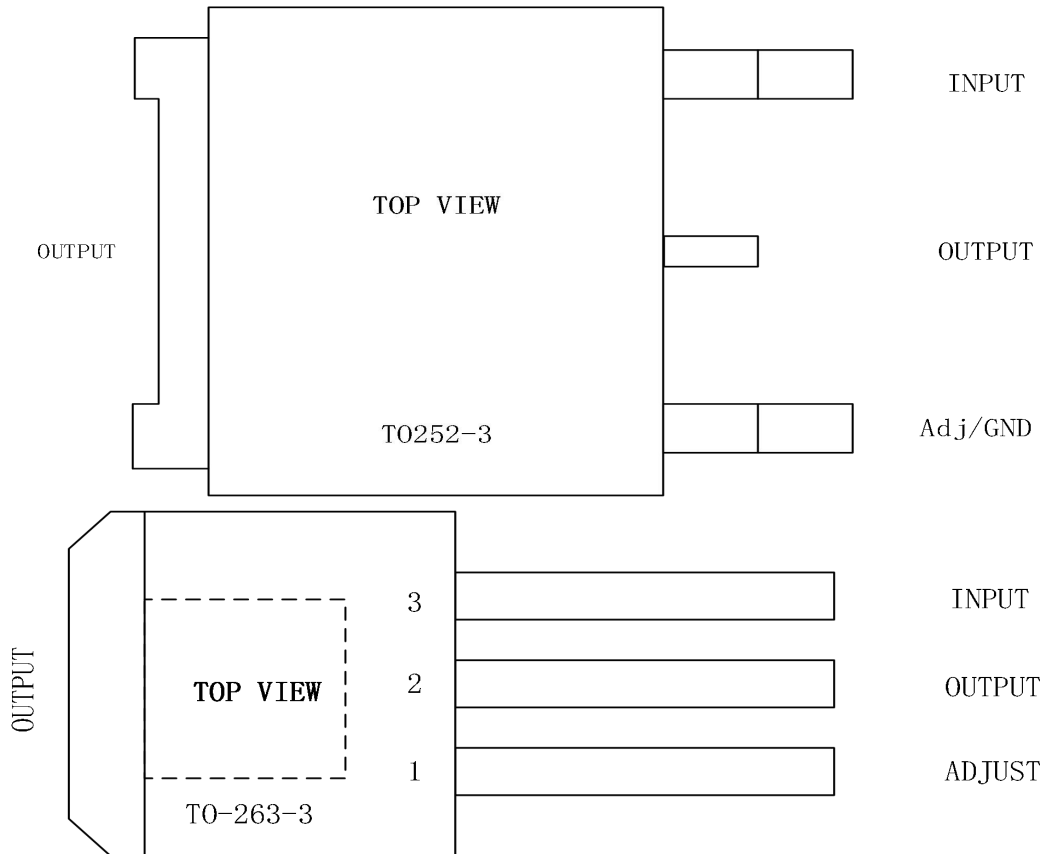

Pin Assignment

Num	Symbol	I/O	Description
1	ADJUST	I	Output voltage adjustment pin. Connect to a resistor divider to set VO
2	OUTPUT	O	Voltage output pin
3	INPUT	I	Supply input pin

Standard application

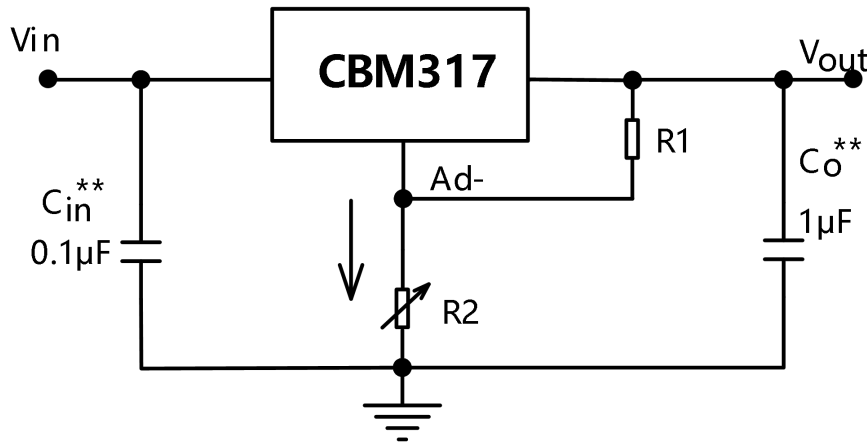

*= Cin is required if regulator is located an appreciable distance from power supply filter.

**=Co is not needed for stability ; however, it does improve transient response.

$$V_{OUT} = 1.25V \left(1 + \frac{R2}{R1} \right) + I_{ADJ} * R2$$

Maximum ratings

Rating	Symbol	Value	Unit
Input - Output Voltage Differential	$V_I - V_O$	40	Vdc
Power Dissipation and Thermal Characteristics	PD	Internally Limited	
Operating Junction Temperature Rang	T_J	-40 to +150	°C
Storage Junction Temperature Rang	T_{STG}	-65 to +150	°C

* Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.

Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Electrical characteristics

($V_I - V_O = 5.0V$, $I_O = 0.5A$, $T_J = T_{LOW}$ to Thigh (see Note 1); $I_{MAX} = 1.5A$ and $P_{MAX} = 20W$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit	
Line Regulation ($T_A = +25^\circ C$) $3.0V \leq V_I - V_O \leq 40V$	Regline	-	0.01	0.04	%/V	
Load Regulation ($T_J = +25^\circ C$) $10mA \leq I_O \leq I_{MAX}$	Regload	$V_{IN} \geq 5V$	-	5.0	25	mV
		$V_{IN} \leq 5V$	-	0.1	0.5	%/V _O
Thermal Regulation ($T_A = +25^\circ C$) 20 ms Pulse	-	-	0.03	0.07	%/W	
Adjustment Pin Current	I_{ADJ}	-	50	100	μA	
Adjustment Pin Current Change $2.5 \leq V_I - V_O \leq 40V$ $10mA \leq I_L \leq I_{MAX}$, $P_D \leq P_{MAX}$	ΔI_{ADJ}	-	0.2	5.0	μA	
Reference Voltage (Note 4) $3.0 \leq V_I - V_O \leq 40V$ $10mA \leq I_L \leq I_{MAX}$, $P_D \leq P_{MAX}$	Vref	1.2	1.25	1.3	V	
Line Regulation (Note 3) $3.0V \leq V_I - V_O \leq 40V$	Regline	-	0.02	0.07	%/V	
Load Regulation (Note 3) $10mA \leq I_O \leq I_{MAX}$	Regload	$V_{IN} \geq 5V$	-	20	70	mV
		$V_{IN} \leq 5V$	-	0.3	1.5	%/V
Temperature Stability ($T_{LOW} \leq T_J \leq T_{HIGH}$)	T_S	-	0.7	-		
Minimum Load Current to Maintain Regulation ($V_I - V_O = 40V$)	$I_{L_{MIN}}$	-	3.5	10	mA	
Maximum Output Current ($T_A = +25^\circ C$)	I_{MAX}	$V_I - V_O \leq 15V$, $P \leq 20W$	1.5	2.2	-	A
		$V_I - V_O = 40V$, $P \leq 20W$	0.15	0.4	-	
RMS Noise, % of V_O $T_A = +25^\circ C$, $10Hz \leq f \leq 10kHz$	N	-	0.003	-	%/V _O	
Ripple Rejection $V_O = 10V$, $f = 120Hz$ (Note 5)	RR	Without C_{ADJ}	- 66	65	-	dB
		$C_{ADJ} = 10\mu F$		80	-	
Long-Term Stability, $T_J = Thigh$ (Note 6) $T_A = +25^\circ C$ for Endpoint Measurements	S	-	0.3	1.0	%/1.0k Hrs.	
Thermal Resistance Junction to Case	$R_{\theta JC}$	-	5.0	-	$^\circ C/W$	

Notes: (1) $T_{LOW} = -40^\circ C$, $T_{HIGH} = +125^\circ C$


(2) $I_{MAX} = 0.5A$, P_{MAX}

(3) Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.

- (4) Selected devices with tightened tolerance reference voltage available.
- (5) C_{adj} , when used, connected between the adjustment pin and ground.
- (6) Since Long - Term Stability cannot be measured on each device before shipment, this specification is an engineering estimate of average stability from lot to lot.

Package Information


TO-252-3

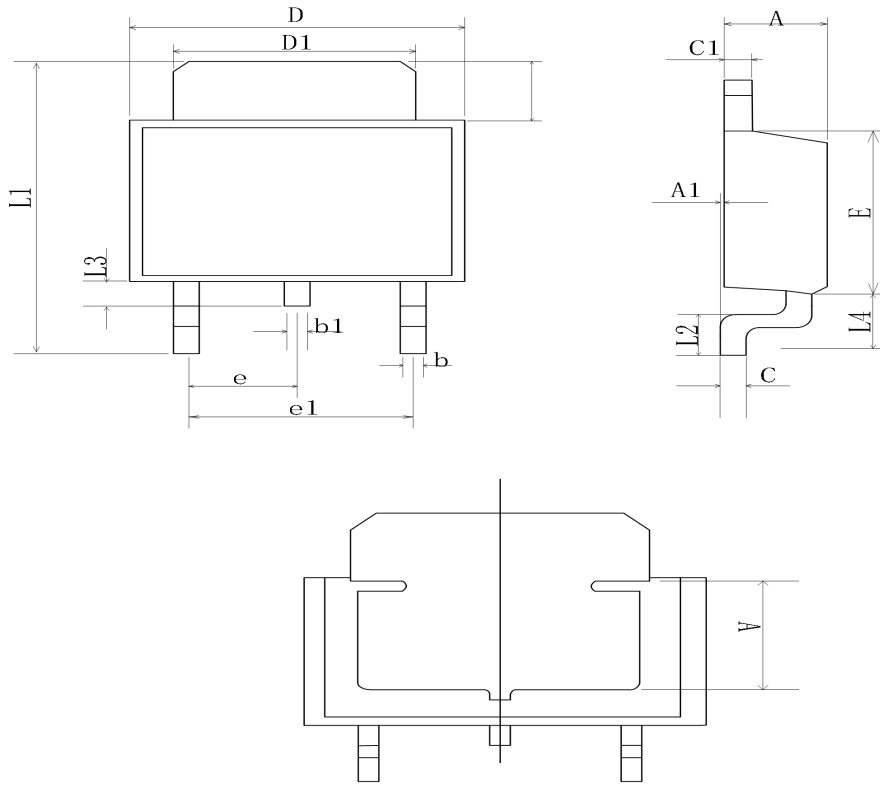

SYMBOL	DIMENSIONS IN MILLIMETERS		DIMENSIONS IN INCHES	
	MIN	MAX	MIN	MAX
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300 TYP		0.091 TYP	
e1	4.500	4.700	0.177	0.185
L1	9.500	9.900	0.374	0.390

L2	1.400	1.780	0.055	0.070
L3	0.650	0.950	0.026	0.037
L4	2.550	2.900	0.100	0.114
V	3.80 REF		0.150 REF	

TO-263-3

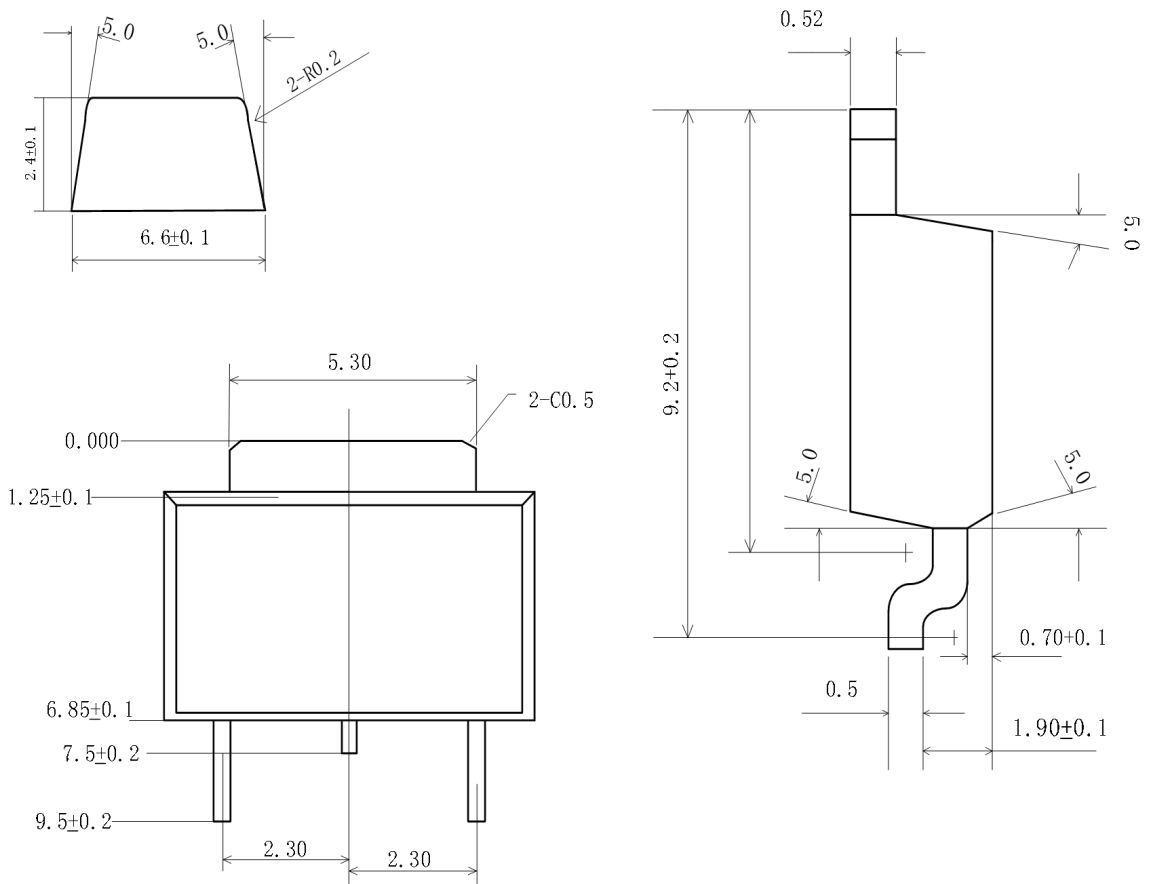

Package/Ordering Information

PRODUCT	ORDERING NUMBER	TEMPRANGE	PACKAGE	PAKEAGE MARKING	TRANSPOT MEDIA,QUANTILY
CBM317	CBM317DT	-40°C~150°C	TO263-3	CBM317	Tape and Reel,500
	CBM317DS	-40°C~150°C	TO-252-3	CBM317S	Tape and Reel,500