




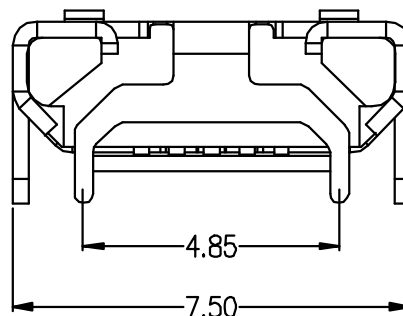

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

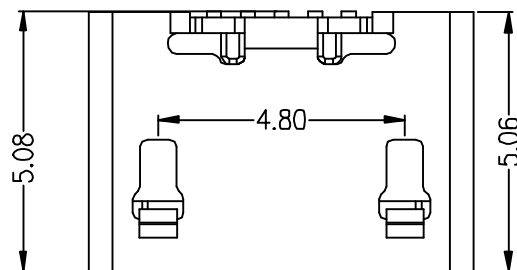

Specifications:

1. Electrical:

- 1.1 Current Rating:1.8A/contact terminal
- 1.2 Voltage Rating:30V DC
- 1.3 Contact Resistance:50 milliohms Max
- 1.4 Dielectric Withstanding Voitage:
300 V AC AT Sea Level
- 1.5 Insulation resistance:100MEGA ohms MIN

2. Mechanical:

- 2.1 Cnnector Mate and Unmate Force
Mate force:3.0kgf (Max)
Unmate force:0.7kgf (MIN)

- 2.2 Durability:2000 cycles

3. Material:





- 3.1 Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 LCP Black

- 3.2 Contact C5191-EH

- 3.3 Shell: H65 EH0.3MM

4. PLATING:

- 4.1 Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 4.2 Shell:Nickel 50u"Min Plated.

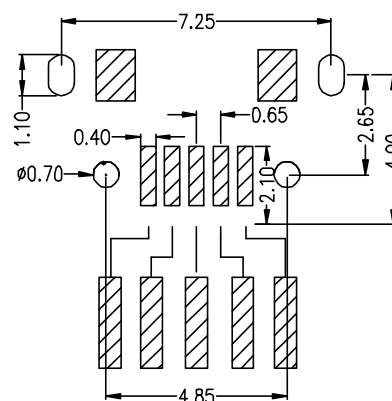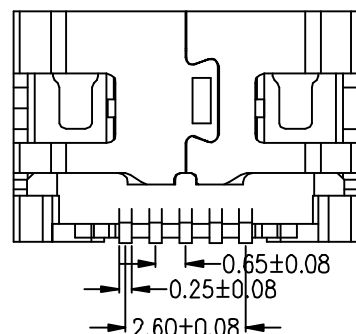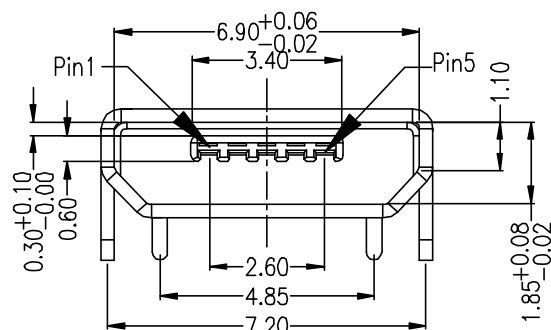

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.35 X :±2°
X.X :±0.25 X.X :±1°
X.XX :±0.15



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	MICRO USB 小牛角 无卷边			
DWN	xiong	PART NO. MC-601-AWT		
CHKD	lee	SCALE:1:1	UNIT: mm	
APVD	wang	SIZE: A4	SHEET:1OF 1	REV: A4

CUSTOMER COPY