

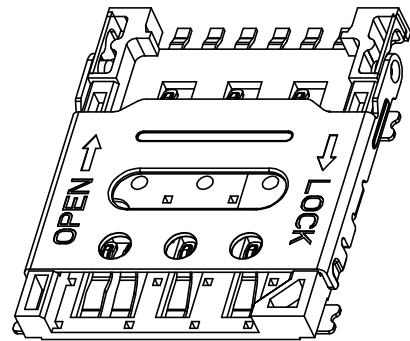





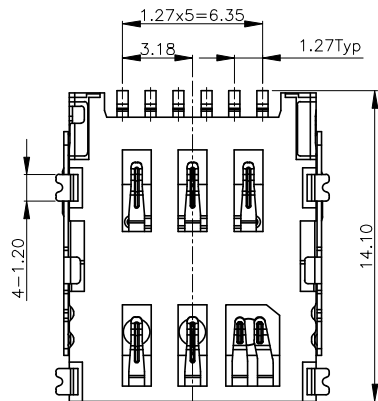


REV.	ECN NO OR DESCRIPTION	REVISED	DATE

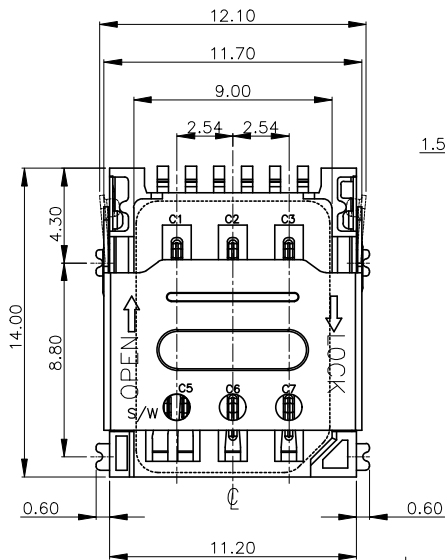

- NOTES:
- ELECTRICAL CHARACTERISTICS
1-1. CONTACT RESISTANCE: 60 Milliohms Max
1-2. INSULATION RESISTANCE: 1,000 Megohms Min.
1-3. VOLTAGE RATING: 50V.
1-4. CURRENT RATING: 1.0A.
 - MECHANICAL CHARACTERISTICS
2-1. OPERATION TEMPERATURE RANGE: -20°C~+85°C
2-2. DURABILITY: 5000 CYCLES
 - MATERIAL:
3-1. HOUSING: THERMOPLASTIC,UL 94-V0
3-2. TERMINAL: PHOSPHOR BRONZE,T=0.15
3-3. SHELL: STAINLESS STEEL,T=0.20
 - FINISHED:
4-1. TERMINAL: Ni PLATED UNDER, 3U" Au MIN PLATED ON CONTACT AREA,AU PLATED ON SOLDER TAIL

NANO SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	Switch Pin

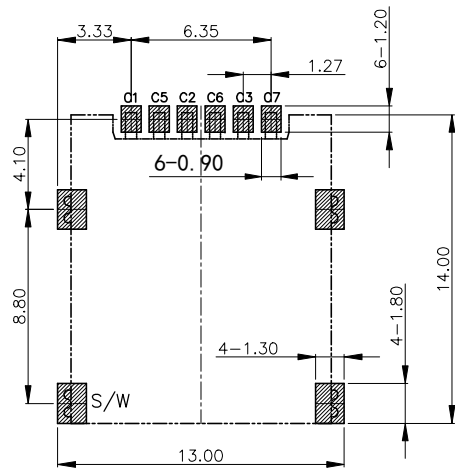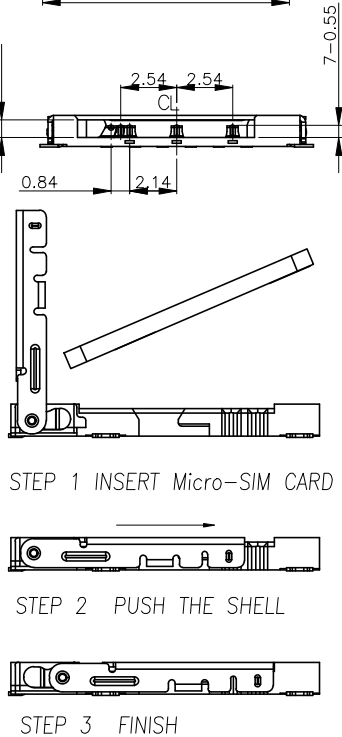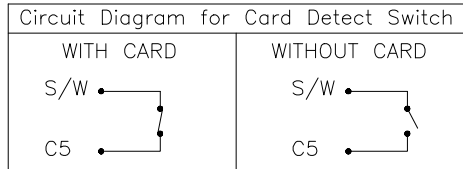

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05
SMT SOLDER AREA

UNLESS OTHERWISE SPECIFIED TOLERANCES		 东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD				
DECIMALS: ANGLES:		TITLE	NANO SIM 1.50H 带检测PIN 掀盖式卡座			
X :±0.20	X :±2°	DWN	xiong	PART NO. SNO-1330-P7		
X.X :±0.15	X.X :±1°	CHKD	lee	SCALE:1:1	UNIT: mm	
X.XX :±0.10		APVD	wang	SIZE: A4	SHEET:10F 1	REV: A4
		CUSTOMER COPY				