


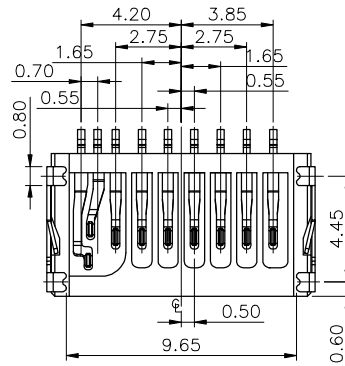
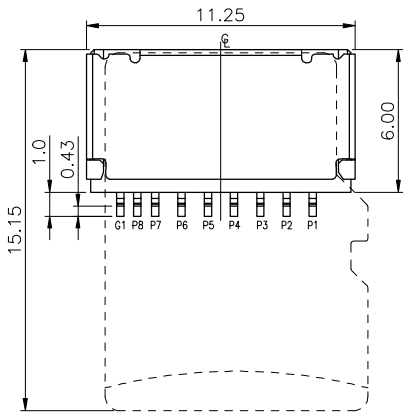
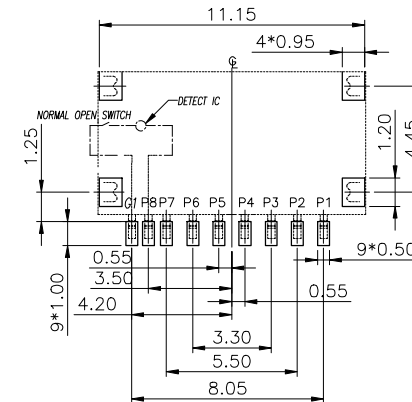





Pin No.	Pin assigenment
PIN1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
PIN5	CLK
PIN6	VSS
PIN7	DAT0
PIN8	DAT1
G1	SWITCH



RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

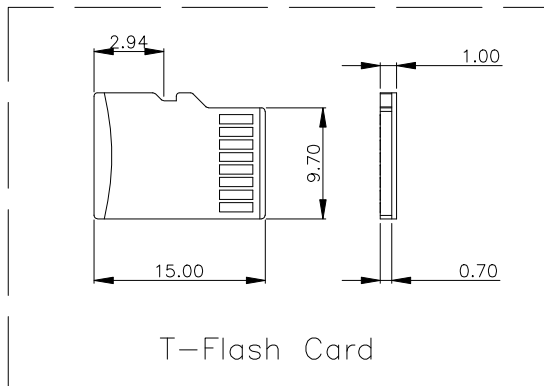

Specification:
1. ELECTRICAL CHARACTERISTICS
1-1. CONTACT RESISTANCE: 80 milliohms MAX.
1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
2. MECHANICAL CHARACTERISTICS
2-1. DURABILITY: 3,000 CYCLES
3. RoHS 2002/95/EC COMPLIANT.

C	SHELL	1	STAINLESS STEEL 0.15t	Ni PLATING
B	CONTACT	9	COPPER ALLOY 0.15t	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE
SPECIFIED TOLERANCES



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.20 X.X :±1°
X.XX :±0.10

TITLE	T-FLASH 简易短卡侧边pin			
DWN	xiong	TF-018		
CHKD	lee	SCALE:1:1	UNIT: mm	
APVD	wang	SIZE: A4	SHEET:1OF 1	

CUSTOMER COPY