
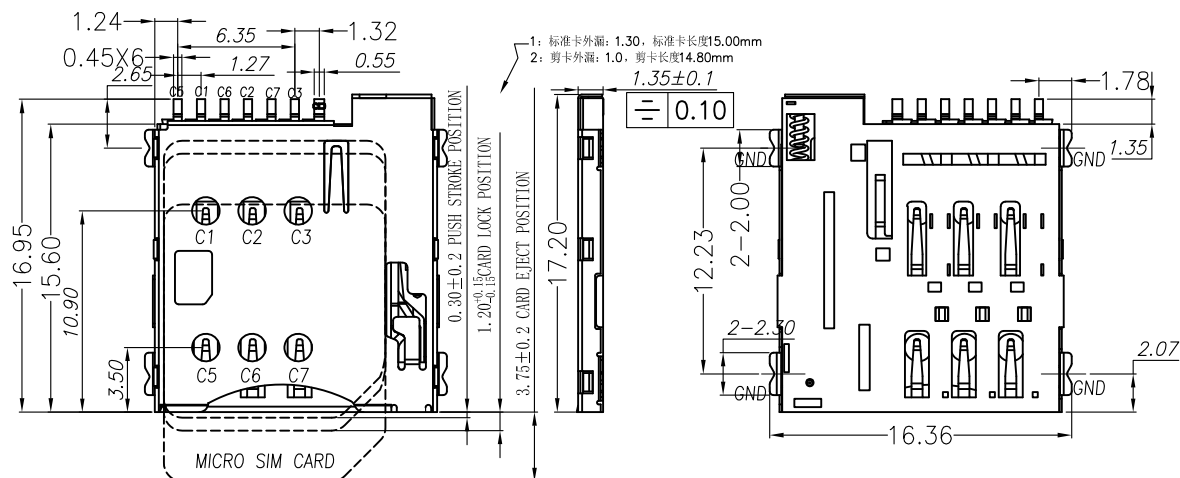



SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出



RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.
Contact: Copper Alloy
SHELL: SUS

PLATING:

Contact: Plated 50u'' Ni Overall Contact Au 1U
Shell: Plated 50u'' Ni Overall
Plated 1u''Au Selective Contact Area

Electrical:

Current Rating :0.5mA AC/DC max.
Voltage Rating :125V AC/DC
Ambient Temperature Range : -20°C ~ $+60^{\circ}\text{C}$
Storage Temperature Range : -40°C ~ $+70^{\circ}\text{C}$
Ambient Humidity Range :95% R.H. Max.
Contact Resistance:100m Ω max.
Insulation Resistance:1000M min./500VDC
产品耐温温度: 260
Mating Cycles:3000Min Insertions



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MICRO SIM PUSH 6+1P 1.35H
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW281-SIM07-135B
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2106041635
			SHEET NO. 1 OF 1