
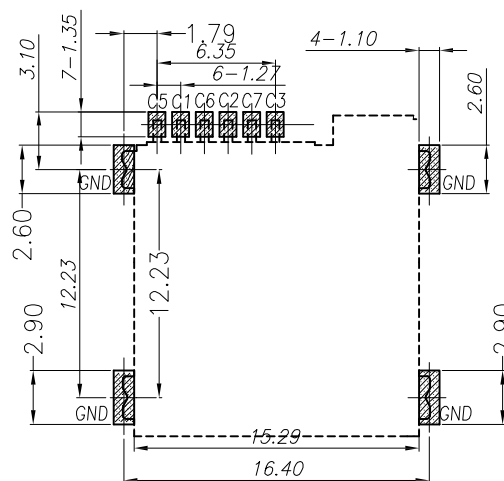
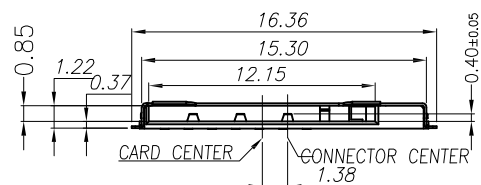
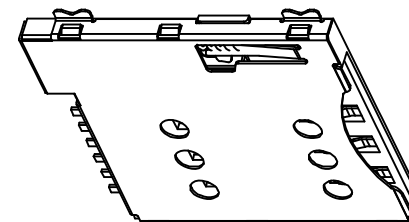
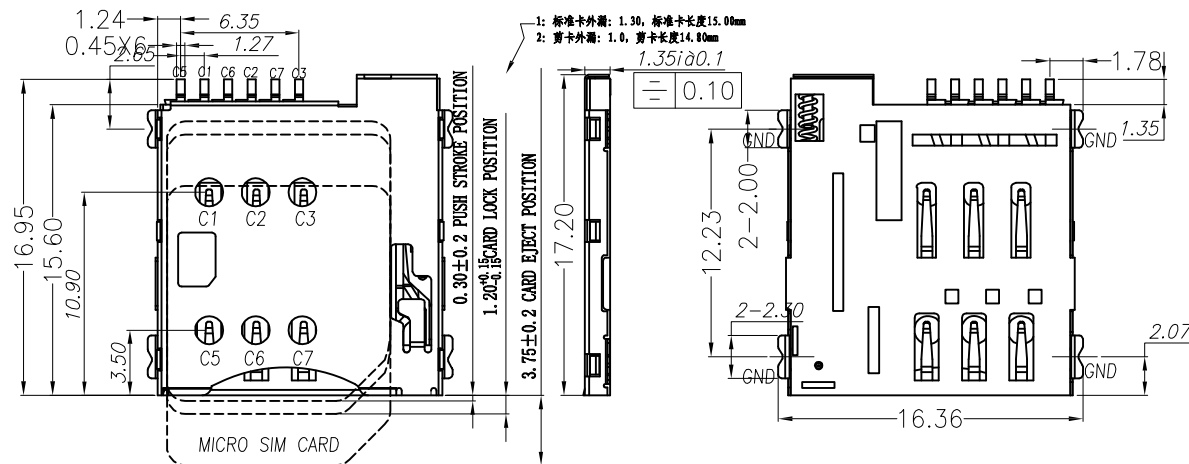
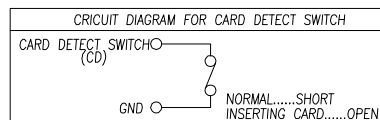


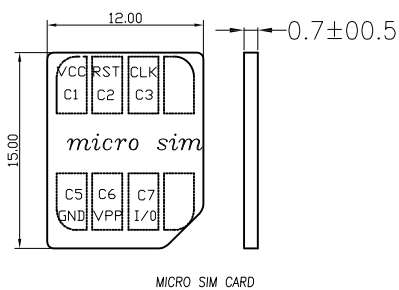

PCB 焊盘区

下沉定位区

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

PIN#	Name
C1	VCC 供电电压
C2	RST 重置
C3	CLK 时钟
C5	GND 接地
C6	VPP 程序电压
C7	I/O 输入输出

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.

Contact: Copper Alloy

SHELL: SUS

PLATING:

Contact: Plated 50u'' Ni Overall Contact Au 1U

Shell: Plated 50u'' Ni Overall

Plated 1u'' Au Selective Contact Area

Electrical:

Current Rating :0.5mA AC/DC max.

Voltage Rating :125V AC/DC

Ambient Temperature Range :-20° C~+60° C

Storage Temperature Range :-40° C~+70° C

Ambient Humidity Range :95% R.H. Max.

Contact Resistance:100m max. Ω

Insulation Resistance:1000M min./500VDC

产品耐温温度: 260° C - C 84.70±5 C

Mating Cycles:3000Min Insertions



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MICRO SIM PUSH 6P 1.35H
UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW280-SIM06-135B
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2105241525
			SHEET NO. 1 OF 1