
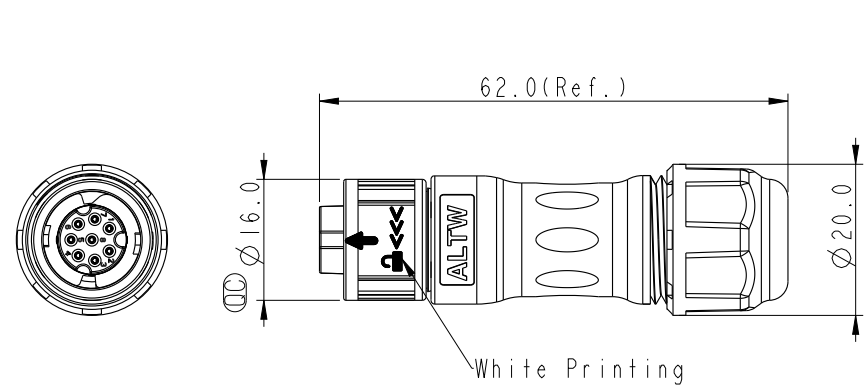


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C220971	2022-06-25	Ouyang	$\triangle B$ X2
C	C221184	2022-08-04	Ouyang	$\triangle C$ X1

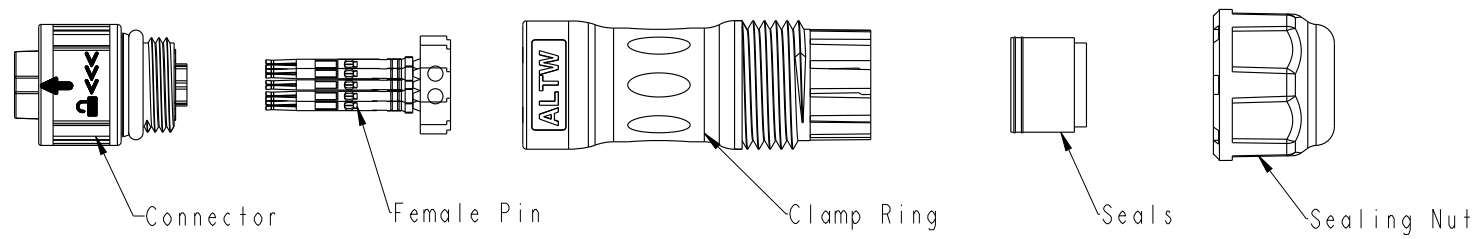

AU-XXBFFA-QL8XP0  
 06-6Pin  
 07-7Pin  
 08-8Pin

S: With Red Color Seal 1, Cable OD 5.0~6.0mm.  
 M: With Yellow Color Seal 2, Cable OD 6.0~8.0mm.  
 L: With Blue Color Seal 3, Cable OD 8.0~10.0mm.  
 A: With Seal 1 & Seal 2 & Seal 3.

Note:  $\triangle B$   $\triangle C$   
 \* RoHS Compliant  
 \*  $\varnothing$  Important Dimension  
 \* Waterproof Rate: IPX8, Mated 1m/24h  
 \* Connector  
 Housing: Thermoplastic, Black  
 Pin: Copper Alloy, Gold Plated  
 Nut: Thermoplastic, Black  
 O-Ring: Rubber, Gray  
 Mated O-Ring: Rubber, Black  
 \* Clamp Ring: Thermoplastic, Black  
 \* Sealing Nut: Thermoplastic, Black  
 \* Seal 1: Rubber, Red,  
 \* Seal 2: Rubber, Yellow,  
 \* Seal 3: Rubber, Blue,  
 \* One set unassembled in one PE bag

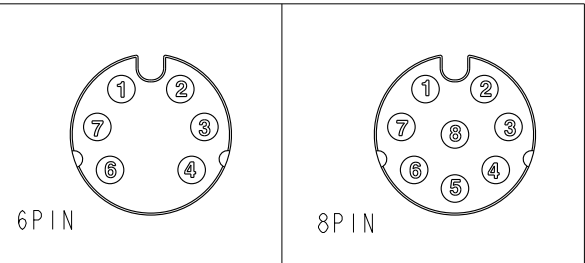

Pin Assignments Front View

UNIT:mm	$\varnothing$	$\nabla$
TOLERANCE	$\pm 0.5mm$	

TITLE X-LOK A SIZE FI Female Crimp Type			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. .0	$\varnothing$ : Inspection item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	$\triangle B$	DRAWN BY Ouyang	DATE 2022-06-10
DWG NO AU-XXBFFA-QL8XP0		CHECKED BY Jerry	DATE 2022-06-10
CUSTOMER ALTW		APPROVED BY Fred	DATE 2022-06-10