




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	E191899	2019/11/14	Ruru	 X4

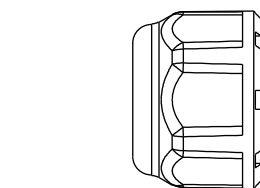


Sealing Nut




Seal

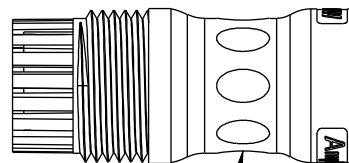

Clamp Ring


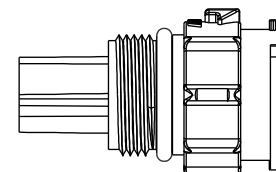


Connector

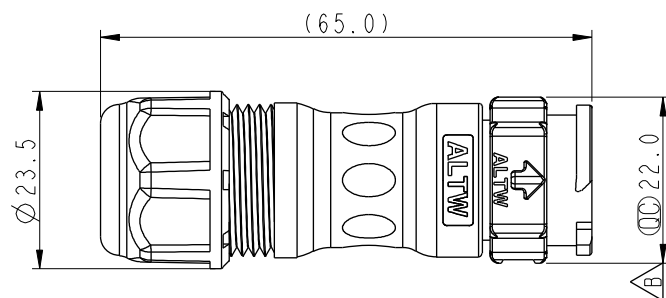

CC-XXBMMA-QL8XNP
02-2 Pin
03-3 Pin


S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

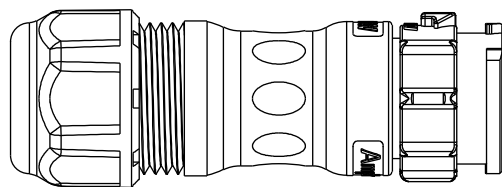

Pin
Assignments
Front View



2 Pin



3 Pin

-  Note:
- *  Important Dimension
 - * Waterproof Rate: IP68, Mated
IP68 : 1M Depth Of Water In 24hours
 - * Housing: Thermoplastic, Black
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals: Rubber

UNIT:mm		TITLE	XLOK, C-20A, CABLE W/O SR M, M, FI CRIMP, XLOK 		
TOLERANCE		SCALE	SIZE	SHEET	OF
± 0.5 mm		1:1	A4	1	1
REV.	B	WC-REV.	.0	 : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2019-11-14
DWG NO	CHECKED BY	DATE
CC-XXBMMA-QL8XNP 	Rita	2019-11-14
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2019-11-14