

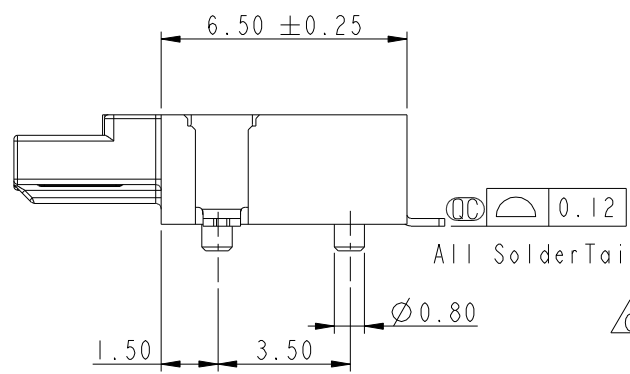
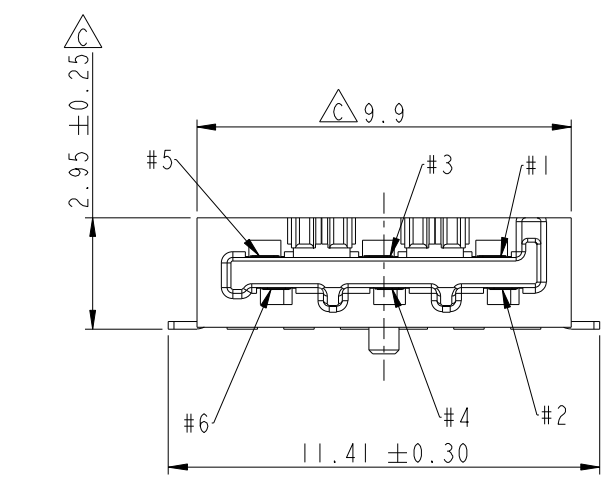
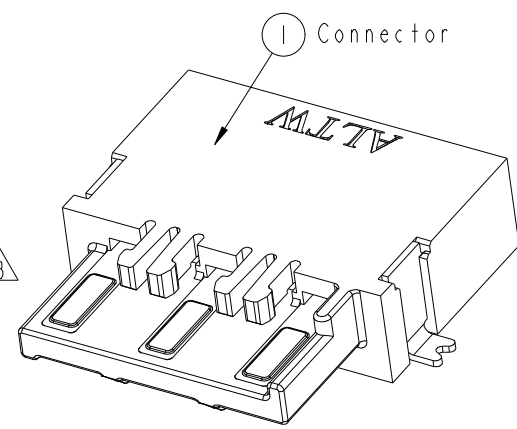
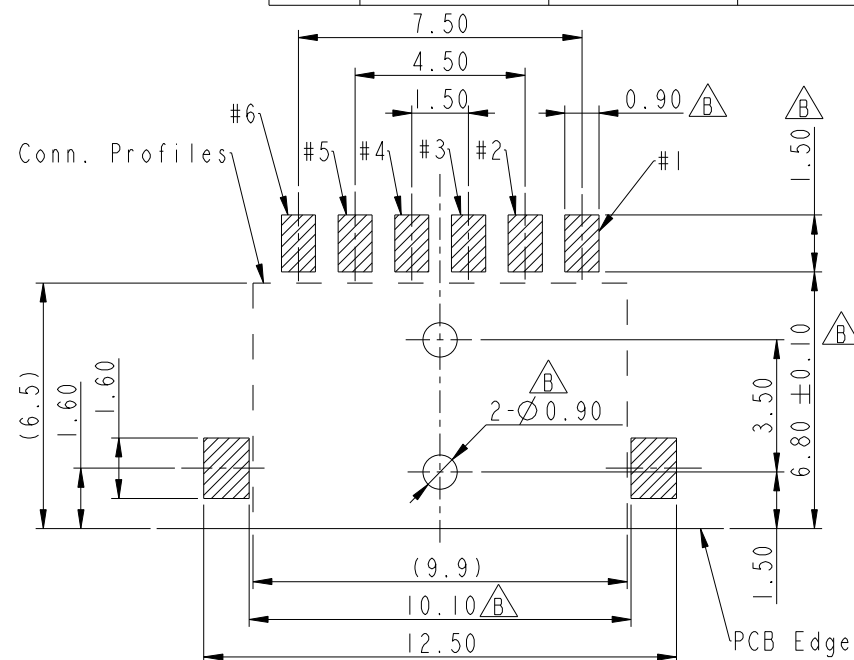


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LE313C0102	2013-12-16	Fisher	Change Plating and Package
D	CI91496	2019-08-30	NianPing Yu	Add UL Label
E	CI92063	2019-12-03	NianPing Yu	EXI

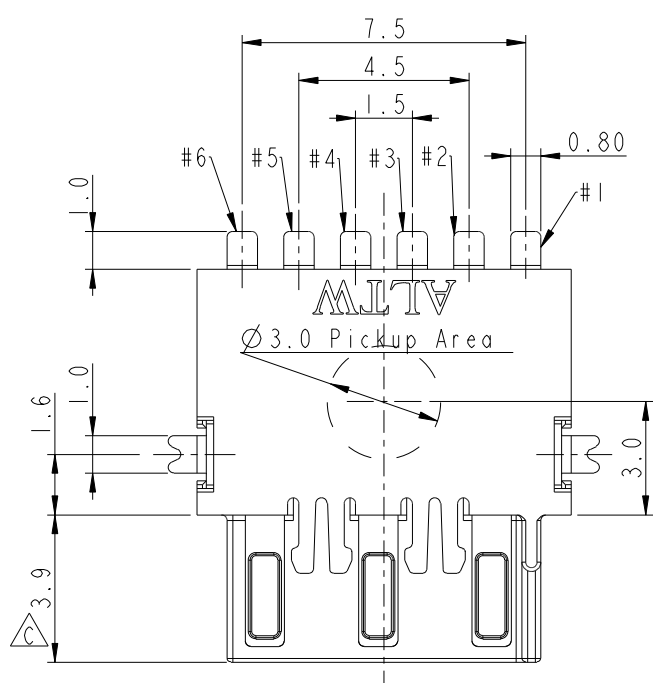

RECOMMENDED P.C.B. LAYOUT
GENERAL TOLERANCE IS ± 0.05



- Notes:
- * CC Important Dimension To Check.
 - * Housing: High temperature thermoplastic. UL94V-0, color is Natural white.
 - * Terminal: Copper Alloy, Gold Plated on contact area. Tin plated on solder tails.
 - * Solder Peg: Copper Alloy, Tin plated over Nickel.

UNIT: mm				TITLE SSL-1.1 DC PLUG CONNECTOR 6-POS. WITH POST, SMT TYPE			Amphenol LTW			ITEM NO SSL11-P6C00-000001		DRAWN BY NianPing Yu		DATE 2019-08-30		
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 5:1		SIZE A4		SHEET 1 OF 2		安費諾亮泰企業股份有限公司			DWG NO SSL11-P6C00-000001		CHECKED BY Fisher Wang		DATE 2019-08-30	
		REV. E		WC-REV. C.3		QC: Inspection item					CUSTOMER ALTW		APPROVED BY Max Yang		DATE 2019-08-30	

