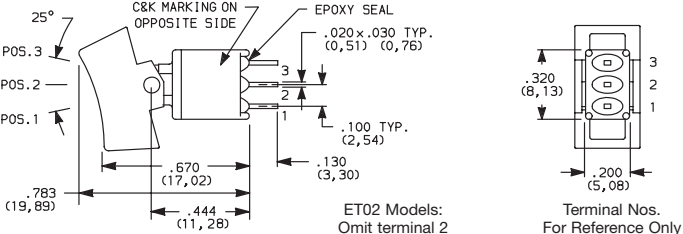

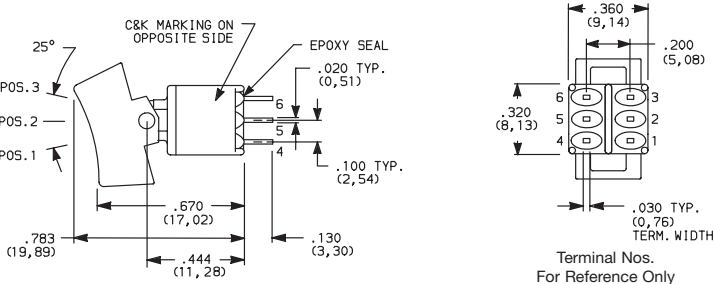


G

ET Series
Sealed Subminiature Rocker Switches


SWITCH FUNCTION

NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS			SCHEMATIC
		POS. 1	POS. 2	POS. 3	POS. 1	POS. 2	POS. 3	
								
SP	ET01	ON	NONE	ON	2-3	N/A	2-1	
	ET03	ON	OFF	ON				
	ET05	MOM.	OFF	MOM.				
	ET07	ON	OFF	MOM.				
	ET08	ON	NONE	MOM.	N/A			
	ET02	OFF	NONE	ON	OPEN	N/A	3-1	SPST 
SPDT 								
DP	ET21	ON	NONE	ON	2-3,5-6	N/A	2-1,5-4	
	ET27	ON	OFF	MOM.		OPEN		
	ET28	ON	NONE	MOM.		N/A		
DPDT 								

MOM. = Momentary

All models with all options when ordered with G, S, R or Q contact material.

Rocker



Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

www.ck-components.com



ET Series Sealed Subminiature Rocker Switches

ACTUATOR


ACTUATOR COLOR

ACTUATOR

J1 ROCKER





PANEL MOUNTING




Available with all models except ET0X with A & SA & SA1 terminations.

J6 ROCKER



PANEL MOUNTING



Standard with ET0X model with A & SA & SA1 terminations.


OPTION CODE	ACTUATOR COLOR
2	BLACK
1	WHITE
3	RED

Actuators available separately, see page G-45. Finish: Matte. Other colors, custom actuator markings and legends available, consult Customer Service Center.

NOTE: Internal o-ring actuator seal standard.


TERMINATIONS

C PC THRU-HOLE

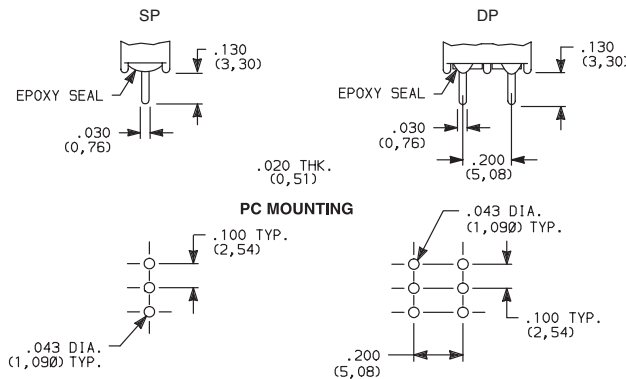

SP & DP


A RIGHT ANGLE, PC THRU-HOLE

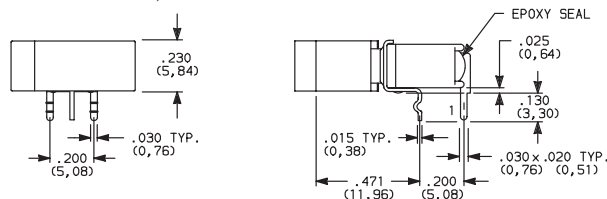

Actuator Shown In Pos. 1


Not available with ET02 model.

J6 actuator std. only on ET0X models with A terminations.

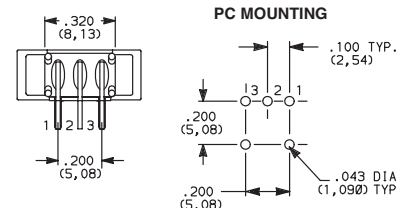


ET01J6ABE2
Horizontal Actuation
SPDT


A RIGHT ANGLE, PC THRU-HOLE

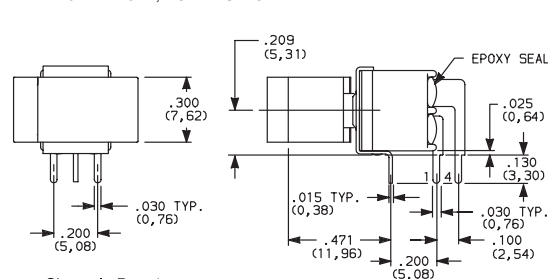

Actuator Shown In Pos. 1

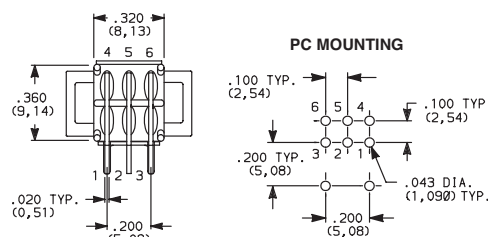

ET21J1ABE2
Horizontal Actuation
DPDT



Dimensions are shown: Inches (mm)

Specifications and dimensions subject to change


www.ck-components.com



ET Series Sealed Subminiature Rocker Switches

TERMINATIONS


AV VERTICAL RIGHT ANGLE, PC THRU-HOLE

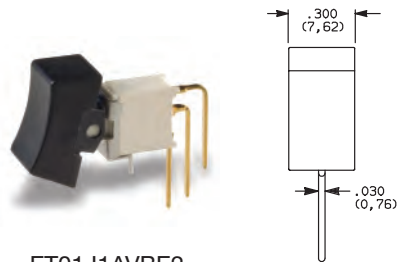

ET01J1AVBE2
Vertical Actuation
SPDT


Actuator Shown In Pos. 1

NOTE: Terminal bend radii and lead-in manufacturing option.

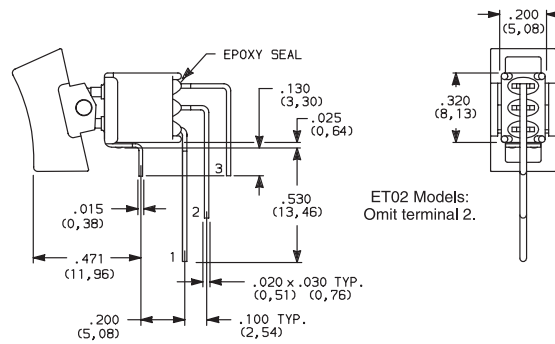


ET02 Models:
Omit terminal 2.

PC MOUNTING




AV VERTICAL RIGHT ANGLE, PC THRU-HOLE

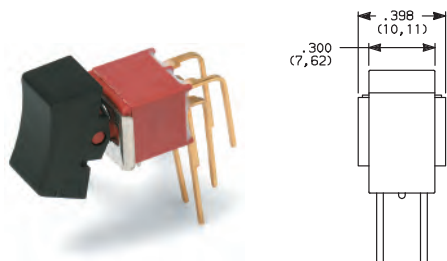


ET21J1AVBE2
Vertical Actuation
DPDT

Actuator Shown In Pos. 1


NOTE: Terminal bend radii and lead-in manufacturing option.

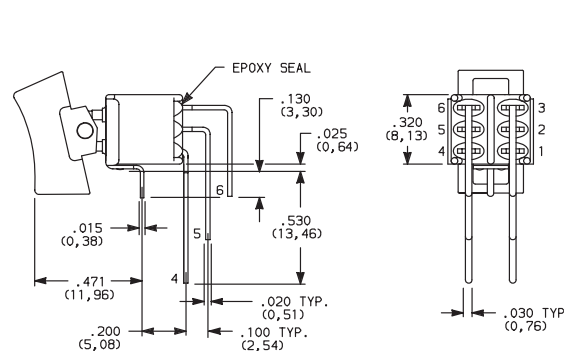

PC MOUNTING




AV2 VERTICAL RIGHT ANGLE, PC THRU-HOLE

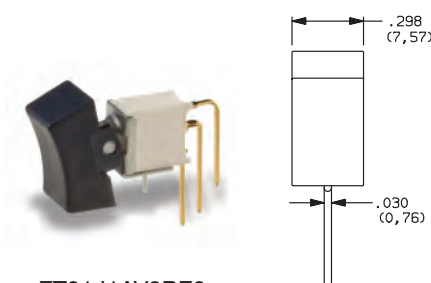


ET01J1AV2BE2
Vertical Actuation
SPDT

SPDT

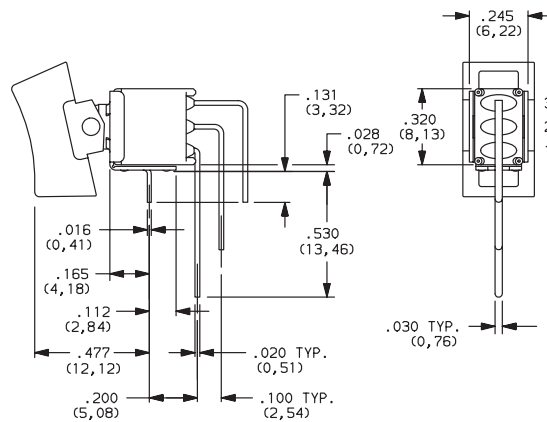

PC MOUNTING



Rocker



C&K




Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

ET Series Sealed Subminiature Rocker Switches


TERMINATIONS

SA RIGHT ANGLE, SURFACE MOUNT

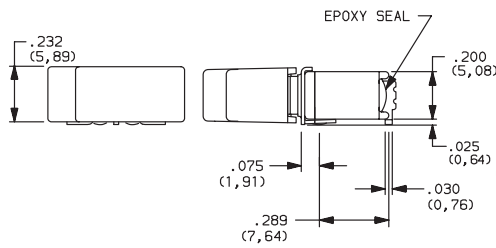


NOTE: Standard with tape & reel packaging, see page G-44.
Available with P contact material only.

PANEL MOUNTING

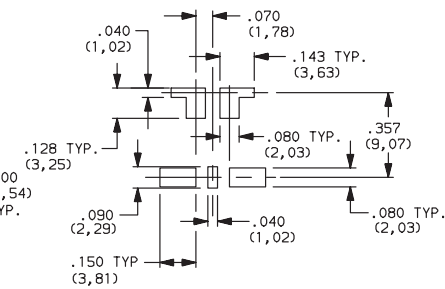


ET01J6SAPE2
Horizontal Actuation
SPDT


V3 VERTICAL MOUNT, V-BRACKET

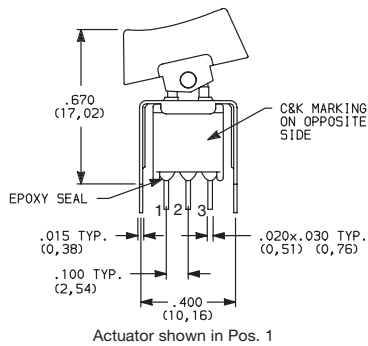

Actuator shown in Pos. 1

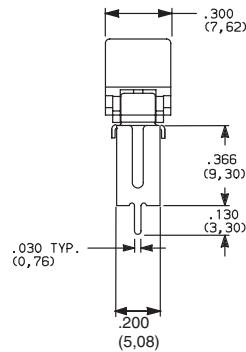


PC MOUNTING




ET01J1V3BE2
SPDT


V3 VERTICAL MOUNT, V-BRACKET

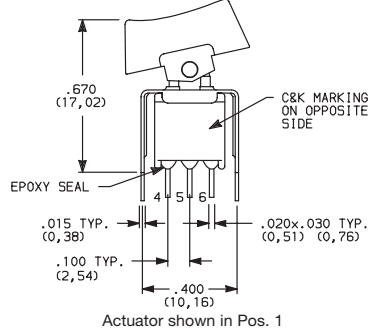

Actuator shown in Pos. 1



PC MOUNTING



ET21J1V3BE2
DPDT

CONTACT MATERIAL

OPTION CODE	CONTACT MATERIAL	TERMINAL PLATING	RATINGS	
B	GOLD ¹	GOLD ¹	LOW LEVEL/ DRY CIRCUIT	0.4 VA MAX. @ 20 V AC OR DC MAX.
P		MATTE-TIN ⁶		
Q	SILVER ^{4,5}	SILVER ⁵	POWER	ETX1 MODELS: 3 AMPS @ 120 V AC OR 28 V DC. ALL OTHER MODELS: 2 AMPS @ 120 V AC OR 28 V DC.
S		MATTE-TIN ⁶		
G	GOLD OVER SILVER ^{2,3}	GOLD ³	LOW LEVEL/DRY CIRCUIT OR POWER	ETX1 MODELS: 0.4 VA MAX @ 20 V AC OR DC MAX. OR 3 AMPS @ 120 V AC OR 28 V DC. ALL OTHER MODELS: 0.4 VA MAX @ 20 V AC OR DC MAX. OR 2 AMPS @ 120 V AC OR 28 V DC.
R		MATTE-TIN ⁶		

* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

¹ CONTACTS & TERMINALS: Copper alloy, with gold plate over nickel plate.

² END CONTACTS: Coin silver, with gold plate over nickel plate.

³ CENTER CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.


⁴ END CONTACTS: Coin silver, silver plated.

⁵ CENTER CONTACT & ALL TERMINALS: Copper alloy, silver plated.

⁶ TERMINALS: Copper alloy, with matte-tin over nickel plate.

NOTE: Any models supplied with Q, B, G, S, P & R contact material are RoHS compliant.

All models  with all options when ordered with G, Q, S & R contact material.



Dimensions are shown: Inches (mm)

Specifications and dimensions subject to change


www.ck-components.com



ET Series Sealed Subminiature Rocker Switches

SEAL 

E EPOXY SEAL



AVAILABLE HARDWARE

J1 Actuator



PART NO.

261A01000 WHITE
261A02263 BLACK
261A03000 RED

Material: Nylon
Finish: Matte

NOT AVAILABLE WITH A, SA, SA1

J6 Actuator



PART NO.

621C01000 WHITE
621C02263 BLACK
621C03000 RED


Material: Nylon
Finish: Matte
For Hi Temp, Consult Factory

NOTE: Other colors available,
consult Customer Service Center.

TAPE & REEL SA TERMINATION


ET01J6SABE (SHOWN)

REEL INFORMATION	
OUTSIDE DIAMETER	13.00 (330,0)
PILOT HOLE	.512 (13,0)
QUANTITY PER REEL	500

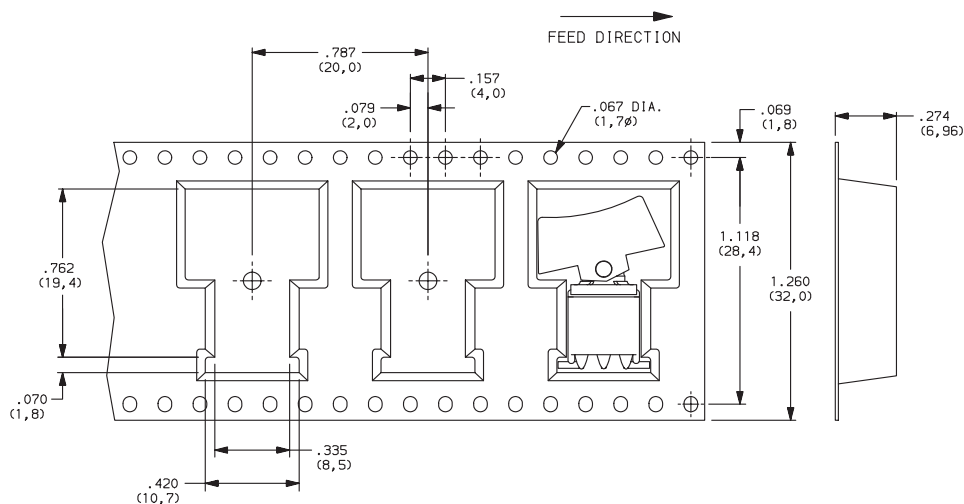

ET01J6SA1BE (SHOWN)

REEL INFORMATION	
OUTSIDE DIAMETER	13.00 (330,0)
PILOT HOLE	.795 (20,20)
QUANTITY PER REEL	450

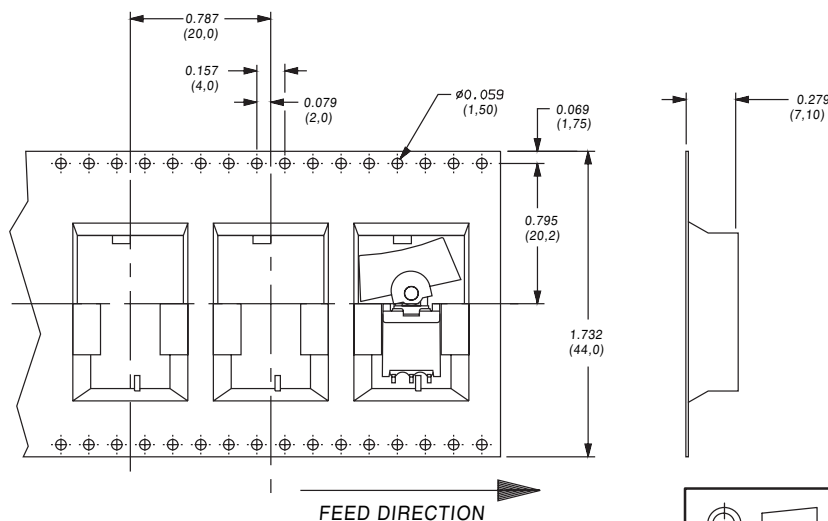

Rocker



G

C&K

 Third Angle Projection

Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Components:

[ET01J61ABE](#) [ET01J63ABE](#) [ET01J62ABE](#)

C&K Switches:

[ET21J1AQE2](#) [ET21J1V3BE2](#) [ET01J1V3BE2](#) [ET01J6CBE2](#) [ET01J6SA1BE2](#) [ET05J6SA1BE2](#) [ET02J6V3ME2](#)
[ET01J6AVGE2](#) [ET01J6AVPE2](#) [ET01J6V3BE2](#) [ET01J6V3PE2](#) [ET01J6V3SE2](#) [ET02J1V3GE2](#) [ET02J6AVBE2](#)
[ET02J6AVQE2](#) [ET02J6V3GE2](#) [ET03J6AVBE2](#) [ET05J6SAKE2](#) [ET05J6V3PE2](#) [ET08J1AQE2](#) [ET08J1V3QE2](#)
[ET21J6AVQE2](#) [ET21J6CBE2](#) [ET21J6V3BE2](#) [ET28J1ABE2](#) [ET28J6ABE2](#) [ET01J1ABE2](#) [ET01J1AVBE2](#)
[ET01J1AVGE2](#) [ET01J1AVQE2](#) [ET01J1CME2](#) [ET01J6AGE2](#) [ET01J6ALE2](#) [ET01J6AME2](#) [ET01J6AV2BE2](#)
[ET01J6AVBE2](#) [ET01J6AVQE2](#) [ET01J6SAKE2](#) [ET01J6V3GE2](#) [ET02J1AVQE2](#) [ET02J1CBE2](#) [ET02J1CQE2](#)
[ET03J1AVBE2](#) [ET03J6ABE2](#) [ET03J6AGE2](#) [ET03J6CBE2](#) [ET05J1ABE2](#) [ET05J1AVBE2](#) [ET05J1V3BE2](#)
[ET05J6ABE2](#) [ET05J6AQE2](#) [ET05J6CBE2](#) [ET05J6V3BE2](#) [ET05J6V3KE2](#) [ET07J1AVBE2](#) [ET08J6V3BE2](#)
[ET21J1ABE2](#) [ET21J1AVBE2](#) [ET21J1AVQE2](#) [ET21J1V3BE1](#) [ET21J6AVBE2](#) [ET27J1CBE2](#) [ET01J1V3BE1](#)
[ET05J6SAPE2](#) [ET07J1CBE2](#) [ET03J6SA1BE2](#) [ET07J6SA1BE2](#) [ET08J6SA1BE2](#) [ET01J1AV2BE2](#) [ET03J1V3BE2](#)
[ET02J1AVBE2](#)