

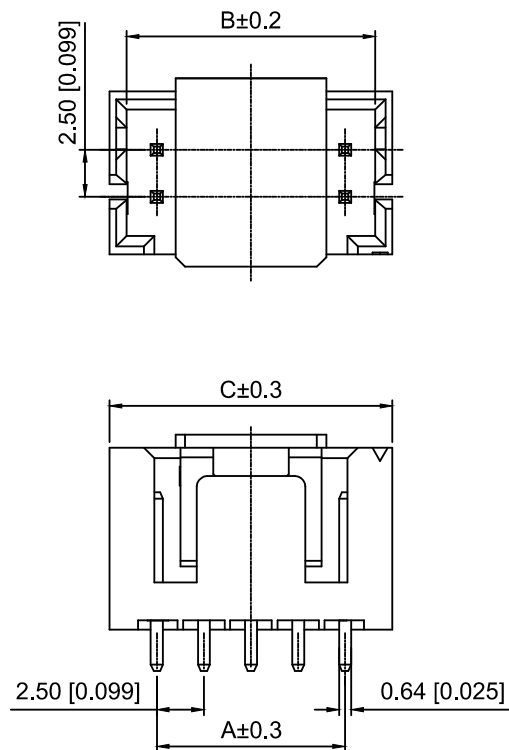


Recommended PCB Layout(Top view)
Tolerance:±0.05mm

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:800V AC/minute

耐受电压: 800V AC/分钟

Temperature range:-25℃-+85℃

温度范围: -25℃-+85℃

Insulation resistance:≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance:≤30mΩ

接触电阻: ≤30mΩ

X8826 W V - 2x03 R - LP SN
① ② ③ ④ ⑤ ⑥ ⑦

1.Series No

2.Category:W-Wafer

3.Welding Board Angle:V-Straight 180°

4.Row No.Pin No:2xXX-2x02~2x12Pin

5.Special No:R-DIP 2.2mm

6.Material:LP-LCP UL94V-0 ,Natural

7.Plating:SN- Tin Plated

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2x02	2.50	5.70	7.50	2x08	17.50	20.70	22.50
2x03	5.00	8.20	10.00	2x09	20.00	23.20	25.00
2x04	7.50	10.70	12.50	2x10	22.50	25.70	27.50
2x05	10.00	13.20	15.00	2x11	25.00	28.20	30.00
2x06	12.50	15.70	17.50	2x12	27.50	30.70	32.50
2x07	15.00	18.20	20.00				

X8826WV-2x03R-LPSN	LCP	Brass	X8826H
PART NO	Material	Material(Pin)	Suitable XKB Housing

DSND		SCALE: N/A	MODEL TYPE: 2.5mm Crimp Style Connector
DWN		VIEW:	PART NO.: X8826WV-2x03R-LPSN
CHKD		UNIT: mm/in	DWG NO.: X-X8826WV-2x03R-LPSN
APPD		SIZE: A4	

					ANGLAR	±5°
ΔX					L≤ 4	±0.2
ΔX					4<L≤ 16	±0.3
ΔX					16<L≤ 63	±0.4
MARK					L> 63	±0.5
DESCRIPTION					DATE	REVISED
REVISIONS					APPROVED	UNSPECIFIED TOLERANCES
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0