

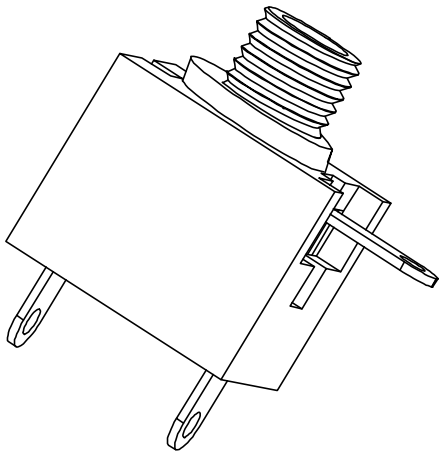
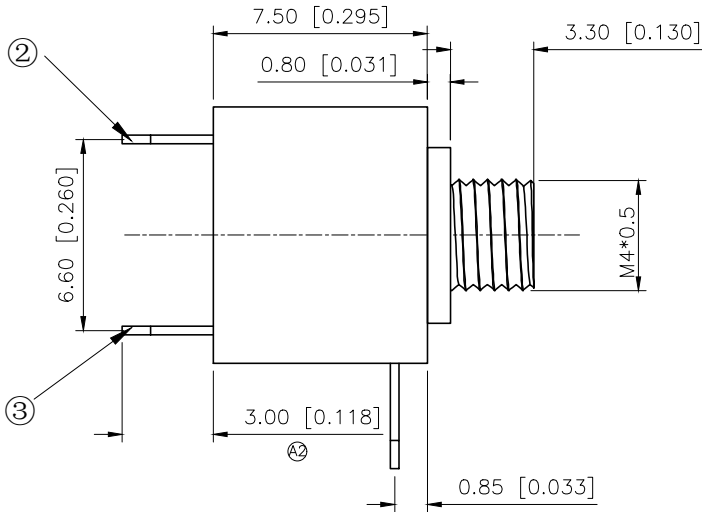


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图面升级整理图面	2025.06.25	阿树
A2	ECN-P-2026042302	②X3	产品材质及尺寸变更	2026.04.23	山楂

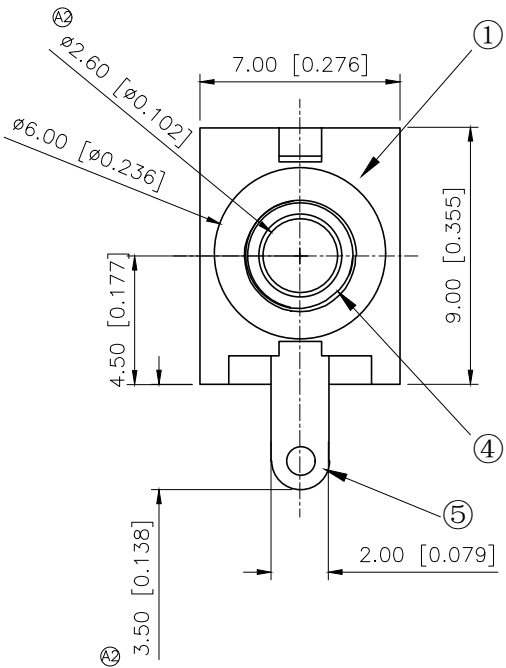

- Specifications (规格):
- 1.Voltage rating (额定电压): DC 30V
 - 2.Current rating (额定电流): 0.5A AC/DC
 - 3.Withstanding voltage (耐压值): $\geq 500V$ AC/minute
 - 4.Insulation resistance (绝缘电阻): $\geq 100M\Omega$ Min
 - 5.Contact resistance (接触电阻): $\leq 30m\Omega$ Max
 - 6.Mating cycles (使用寿命): 5000 cycles Min
 - 7.Insertion and extraction force (插拔力): 3~20N
 - 8.Temperature range (使用温度): $-30^{\circ}C \sim +70^{\circ}C$

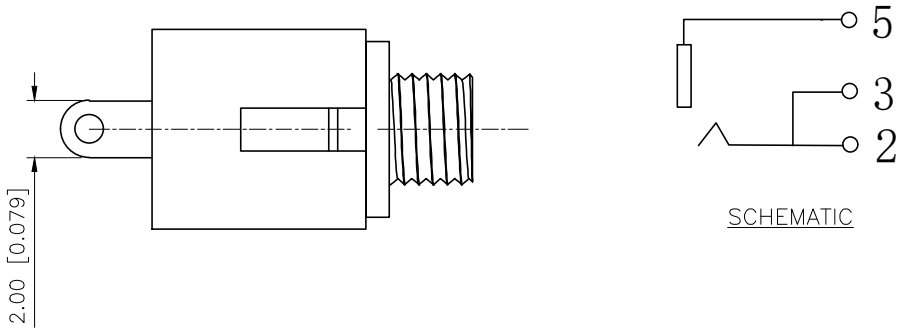

5	Plain	1	H62 Brass band (Y) =0.30mm	CuSn
4	Bushing	1	H59 Brass rods	CuSn
3	Bends	1	H62 Brass band (Y) =0.25mm	CuSn
2	Shrapnel	1	Phosphor copper (Y) =0.25mm	CuSn
1	Pedestal	1	PA	Black
NO	NAME	QTY	MATERIAL	REMARK

AuGLAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	山楂	VIEW:	MODEL TYPE:
CHECKED		UNIT: mm/in	2.5 PHONE JACK
APPROVED		SIZE: A4	PART NO.: PJ-201M
		DWG NO.:	