


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.08.15	阿树

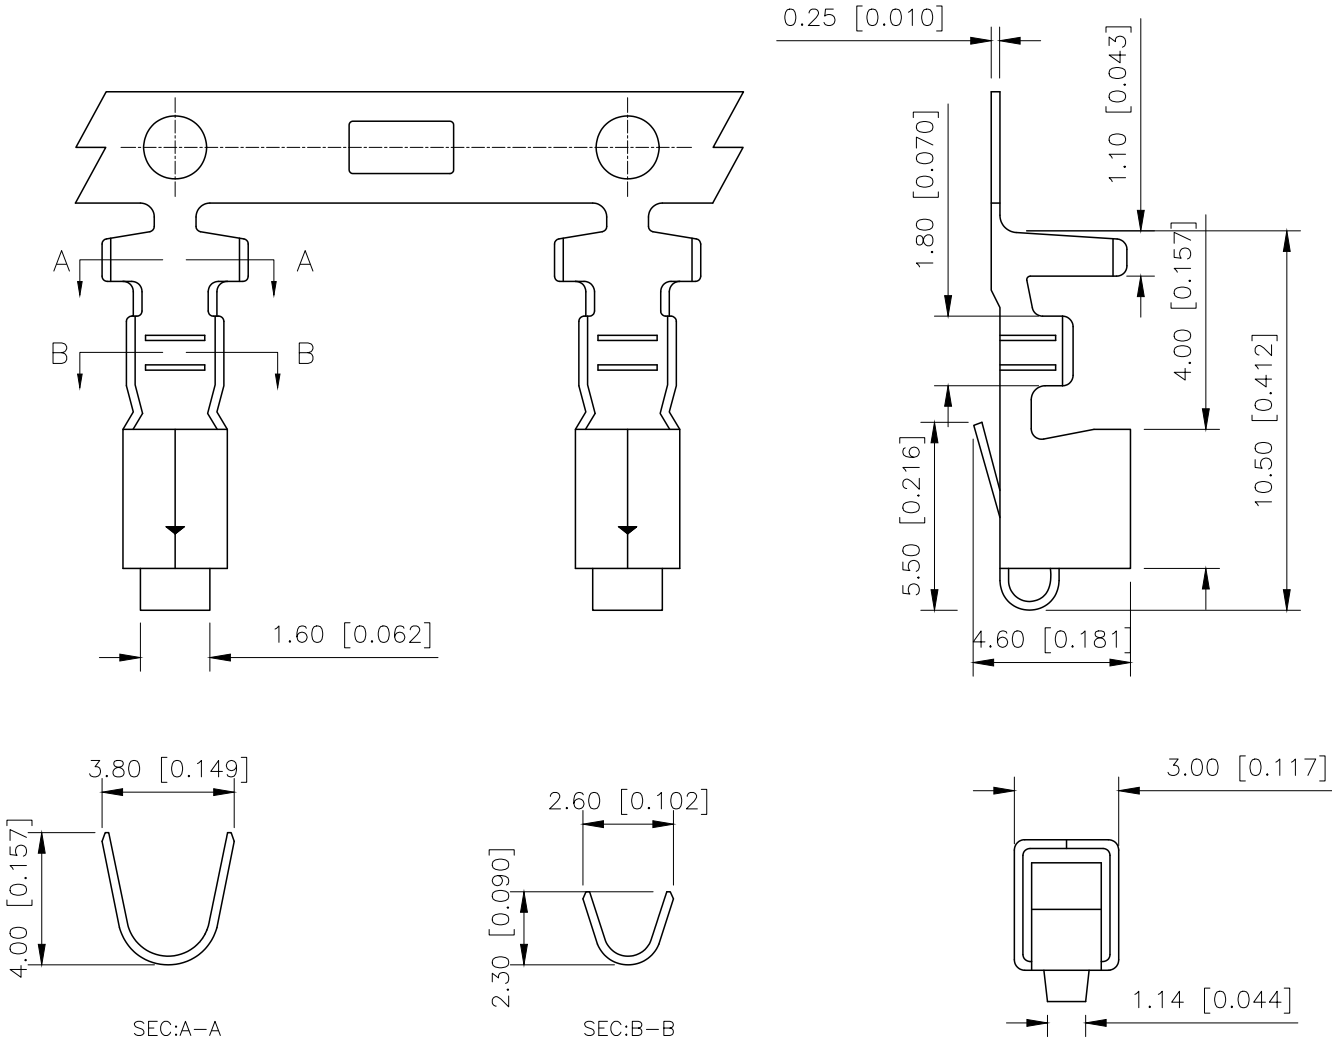

- SPECIFICATIONS
- Voltage rating: 250V AC/DC
 - Current rating: 7A AC/DC
 - Withstanding Voltage: 1500V AC/minute
 - Temperature range: -45°C ~ +125°C
 - Insulation resistance: $\geq 1000\text{M}\Omega$
 - Contact resistance: $\leq 10\text{m}\Omega$
 - After environmental testing: $\leq 20\text{m}\Omega$

PART NO.:
X9396 T-B SN
① ② ③ ④

- ① Series No
② Category: T-Terminal
③ Shape: F-Female Terminal
④ Material: P-Phosphor Bronze
⑤ Plating: SN-Tin Plated

X9396T-BSN	Brass	AWG#16~22	X9396H
PART NO	Material	Wire Range	Suitable XKB Housing
DESIGN	阿树	VIEW:	MODEL TYPE: 3.96mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X9396T-BSN
APPROVED		SIZE: A4	DWG NO.:
SCALE			PAGE
N/A			1/1
REVISION			A1

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO., LIMITED