

COMMON MODE CHOKE CATALOG

Suited for LAN and Telecom Applications




TABLE of CONTENTS

Common Mode Chokes for Datacom Applications

Surface Mount Common Mode Chokes	2-6
Through Hole Common Mode Chokes	7-12

SURFACE MOUNT COMMON MODE CHOKES

Suited for LAN and Telecom Applications

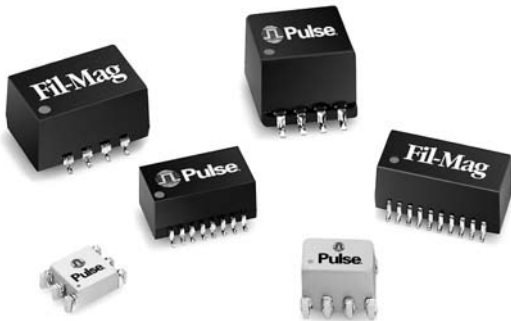

- Reduces radiated EMI emissions
- Filters common mode noise for EMI reduction
- Common mode attenuation from 100 kHz to 1 GHz
- Tape & Reel packaging available for surface mount parts*

Electrical Specifications @ 25°C


Part Number	No. of Lines	Primary Inductance OCL (μH MIN)	Common Mode Attenuation (dB TYP)									DCR (Ω MAX)	Page Number of Mech. & Schem.
			100 KHz	1 MHz	10 MHz	30 MHz	50 MHz	100 MHz	300 MHz	500 MHz	1 GHz		
PE-68624	2	47	11	27	40	44	42	36	26	17	—	0.40	2
PE-65855	2	4700	41	43	49	39	34	26	20	20	12	1.0	4
B2013	2	6300	46	47	43	32	25	29	21	14	16	1.0	3
B4003	2	4700	42	41	48	38	33	21	22	23	17	1.0	6
R0003	3	20	6	14	27	30	30	30	30	28	25	0.40	2
23Z87SM	3	69	9	24	31	30	29	27	21	16	—	0.20	4
PE-65857	4	22.5	7	20	30	37	38	34	24	13	—	0.22	4
PE-68627	4	24	8	21	32	36	37	36	30	20	—	0.25	4
T8003	4	33	9	13	32	32	30	27	16	17	13	0.20	6
23Z4000SMD	4	36	7	23	35	38	38	36	29	24	—	0.50	5
PE-65738	4	37	8	21	28	28	28	27	25	22	—	0.30	3
PE-65854	4	47	3	19	32	36	35	29	12	6	—	0.40	3
23Z104SM	4	68	8	22	28	28	27	25	20	15	—	0.20	5
PE-67540	4	100	14	33	44	48	49	44	34	29	20	0.60	4
PE-65853	4	4700	40	51	38	30	25	20	14	13	—	1.20	3
PE-68602	6	21	6	19	28	34	35	36	34	29	1	0.35	3
23Z106SM	6	68	8	22	29	30	30	29	24	19	—	0.20	5
PE-69011	8	36	8	24	36	39	35	29	18	11	—	0.35	3
23Z105SM	8	68	8	24	30	29	27	24	16	11	—	0.20	5
23Z109SM	10	7.5	4	9	20	25	26	24	16	11	—	0.20	5
T8008	16	47	7	27	40	44	42	36	26	—	—	0.40	6

* When ordering Tape & Reel packaging, add a "T" at the end of the part number (i.e. PE-65738T or 23Z106SMT).

NOTE: Additional common mode chokes are available. Please contact Applications Engineering.

Mechanicals

PE-68624, R0003

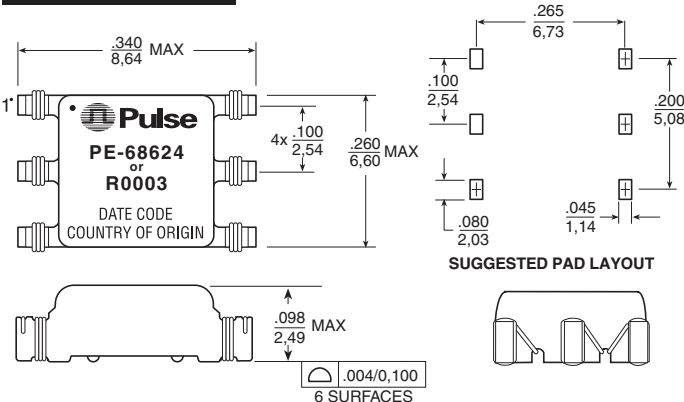

Weight0.17 grams
Tape & Reel1500/reel
Tube85/tube

Schematics

R0003



Connect unused pin to logic ground for optimum performance.

PE-68624



SURFACE MOUNT COMMON MODE CHOKES


Suited for LAN and Telecom Applications



Mechanicals


Schematics

PE-65738, PE-68602, PE-69011

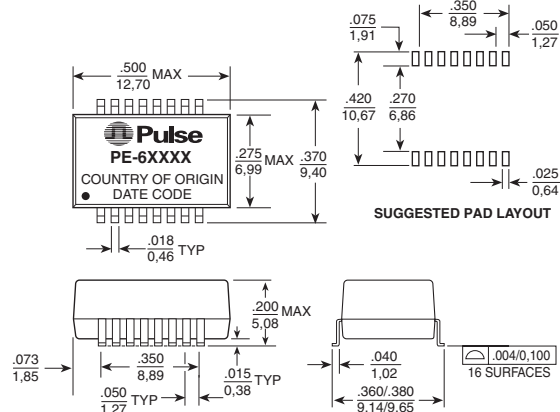


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$


Weight083 grams
Tape & Reel900/reel
Tube40/tube

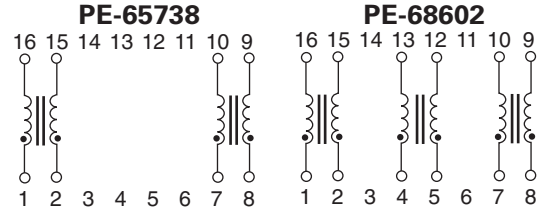

PE-69011




PE-65853

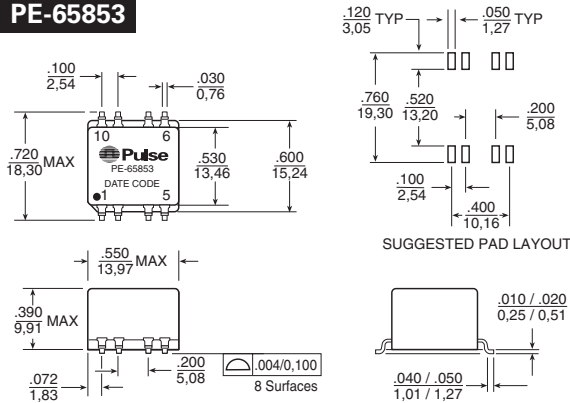


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight4.0 grams
Tape & Reel150/reel
Tube35/tube

PE-65853



B2013

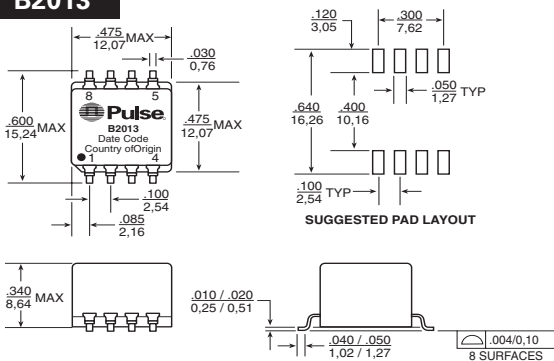


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight9.5 grams
Tray30/tray

B2013




PE-65854

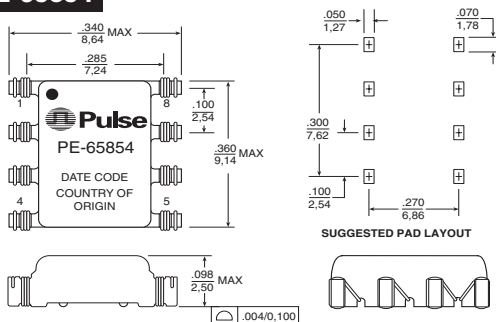

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight0.3 grams
Tape & Reel1500/reel
Tube60/tube

PE-65854



SURFACE MOUNT COMMON MODE CHOKES

Suited for LAN and Telecom Applications




Pulse
A TECHNITROL COMPANY

Mechanicals

Schematics

PE-65855

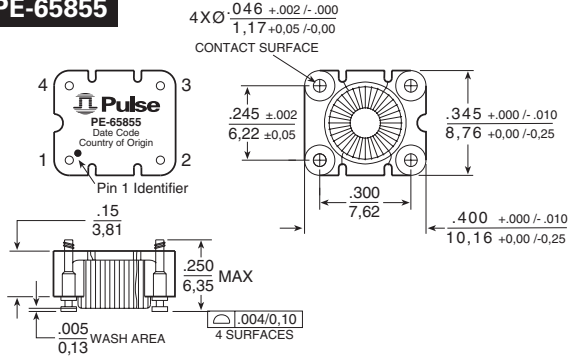


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight **.069** grams
Tape & Reel **.800**/reel
Tube **.40**/tube

PE-65855



PE-65857, PE-67540


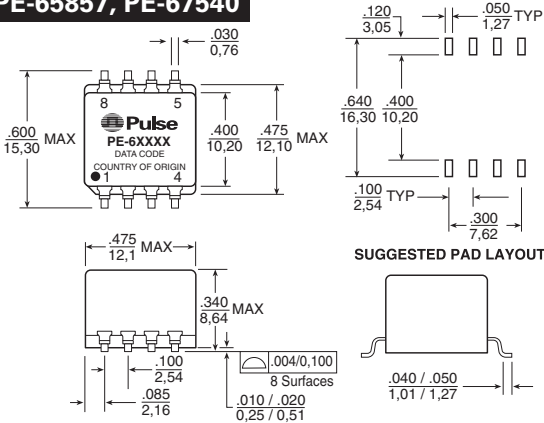


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$


Weight **.2.0** grams
Tape & Reel **.250**/reel
Tube **.40**/tube

PE-65857

PE-67540




PE-68627

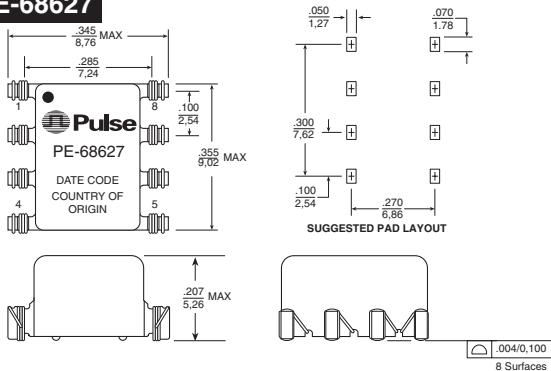


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight **.0.3** grams
Tape & Reel **.1500**/reel
Tube **.55**/tube

PE-68627



23Z87SM

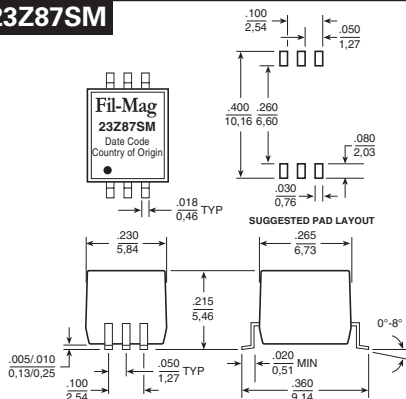

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0,13}$

Weight **.0.5** grams
Tape & Reel **.750**/reel
Tube **.100**/tube

23Z87SM



SURFACE MOUNT COMMON MODE CHOKES


Suited for LAN and Telecom Applications



Mechanicals

Schematics


23Z104SM

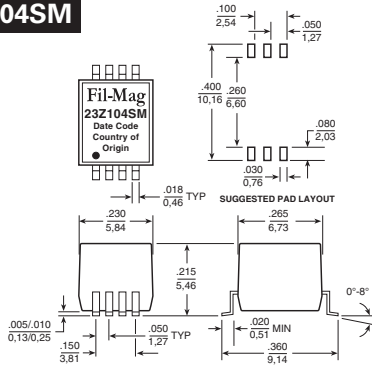


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0.13}$

Weight0.5 grams
Tape & Reel750/reel
Tube100/tube

23Z104SM




23Z105SM, 23Z106SM

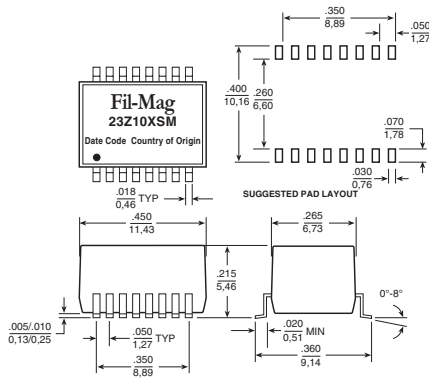


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0.13}$

23Z105SM **23Z106SM**
Weight0.8 grams1.0 grams
Tape & Reel750/reel750/reel
Tube50/tube50/tube


23Z105SM



23Z106SM




23Z109SM

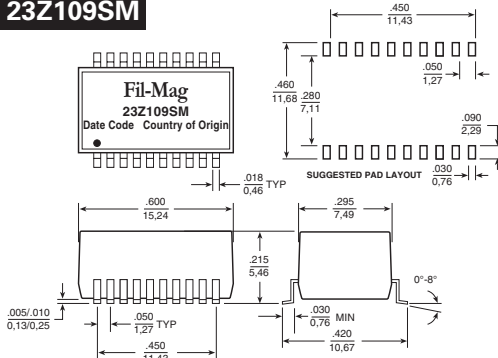


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0.13}$

Weight1.3 grams
Tape & Reel500/reel
Tube38/tube

23Z109SM




23Z4000SMD

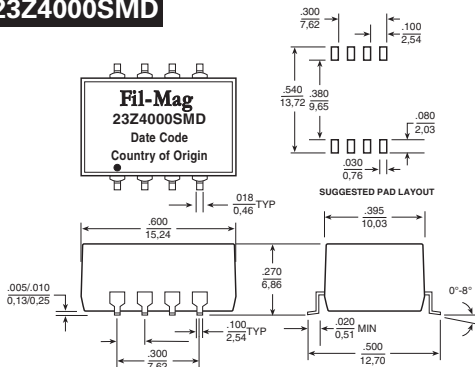

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0.13}$


Weight2.1 grams
Tape & Reel350/reel
Tube38/tube





23Z4000SMD

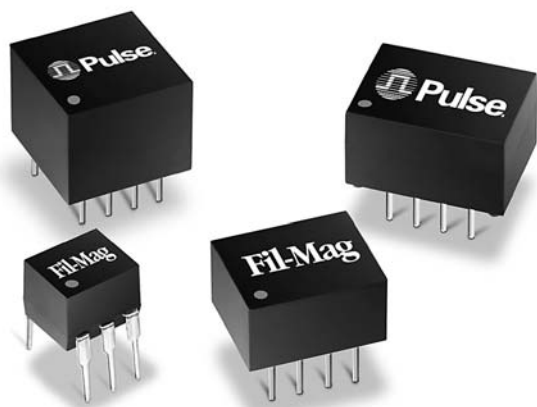

THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications



-  Reduces radiated EMI emissions
-  Filters common mode noise for EMI reduction
-  Common mode attenuation from 100 kHz to 1 GHz
-  Tube packaging available for through hole parts

Electrical Specifications @ 25°C

Part Number	No. of Lines	Primary Inductance OCL (μH MIN)	Common Mode Attenuation (dB TYP)										DCR (Ω MAX)	Page Number of Mech. & Schem.
			100 kHz	1 MHz	10 MHz	30 MHz	50 MHz	100 MHz	300 MHz	500 MHz	1 GHz			
PE-65944	2	24	1	14	28	32	33	28	13	5	—	0.30	9	
23Z107	2	68	8	25	33	32	30	27	18	12	—	0.20	10	
PE-67531	2	140	14	34	45	49	50	47	38	32	25	0.60	9	
B2005	2	9000	47	47	41	30	22	33	21	15	15	1.0	10	
PE-65554	4	24	—	21	32	38	39	34	24	13	—	0.30	8	
42Z4000	4	36	8	24	37	40	40	38	30	24	—	0.20	10	
PE-67501	4	50	14	34	45	49	50	47	20	15	10	0.30	9	
PE-68002	4	68	7	24	37	41	42	40	31	27	—	0.35	9	
23Z104	4	85	8	23	29	29	28	25	17	11	—	0.20	10	
PE-67539	4	140	14	33	44	48	48	43	33	28	19	0.60	9	
PE-65542	4	1000	28	41	42	32	22	—	—	—	—	0.70	8	
PT5039	4	3600	42	43	42	32	27	17	15	9	13	0.50	8	
J0010D11	4	—	9	13	32	35	35	29	13	24	19	0.50	11	
PE-65950	4	4700±30%	40	51	37	28	23	20	—	—	—	1.00	8	
PE-65541	4	6000	44	54	33	32	29	—	—	—	—	1.40	8	
PE-68613	4	3290	40	51	37	28	23	20	—	—	—	1.00	11	
PE-64683	6	25	6	18	32	38	37	32	21	17	—	0.35	8	

THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications




Pulse
A TECHNITROL COMPANY

Mechanicals

Schematics


PE-64683

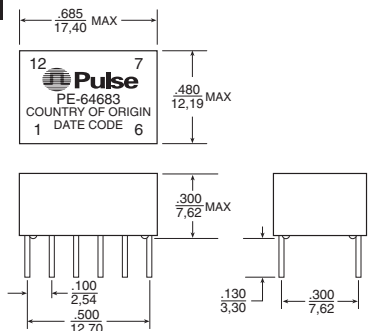


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight027 grams
Tube30/tube

PE-64683




PE-65541, PE-65542, PE-65950

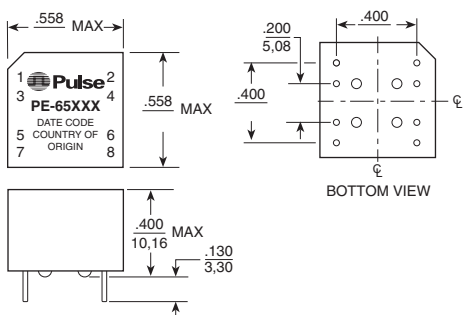


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight038 grams
Tube35/tube

PE-65541 PE-65542 PE-65950




PE-65554

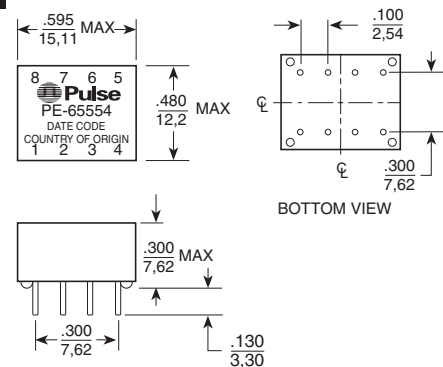


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight2.5 grams
Tube35/tube

PE-65554




PT5039

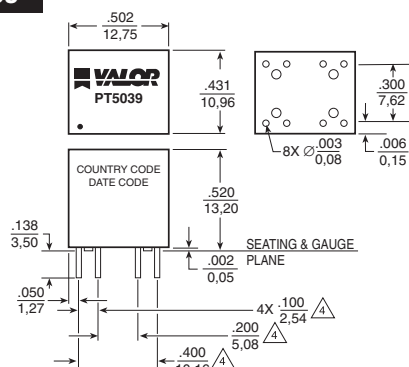

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight2.5 grams
Tube35/tube

PT5039



THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications




Pulse
A TECHNITROL COMPANY

Mechanicals

Schematics

PE-65944

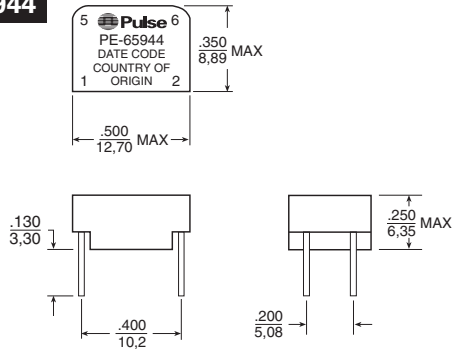


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

PE-65944




Weight 1.07 grams
Tube30/tube

PE-67501, PE-67539

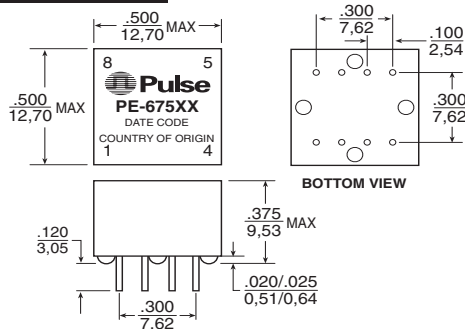


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

PE-67501 PE-67539



Weight 2.4 grams
Tube40/tube

PE-67531

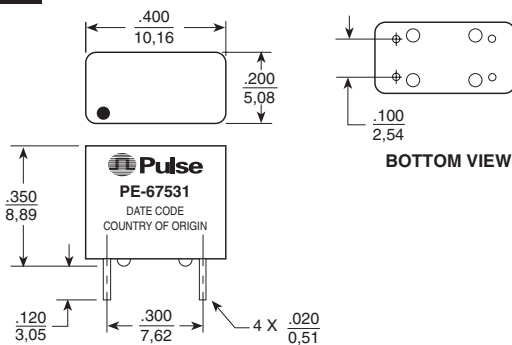


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

PE-67531




Weight 0.76 grams
Tube40/tube

PE-68002

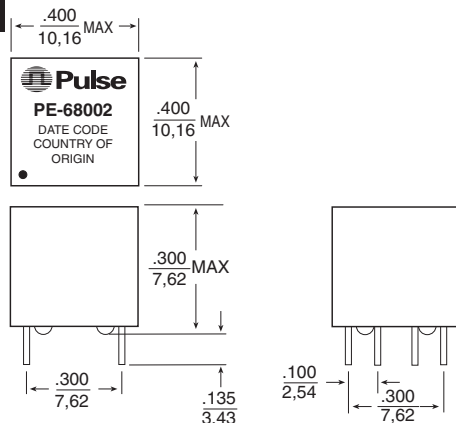

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

PE-68002



Weight 1.4 grams
Tube50/tube

THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications




Pulse
A TECHNITROL COMPANY

Mechanicals

Schematics

B2005

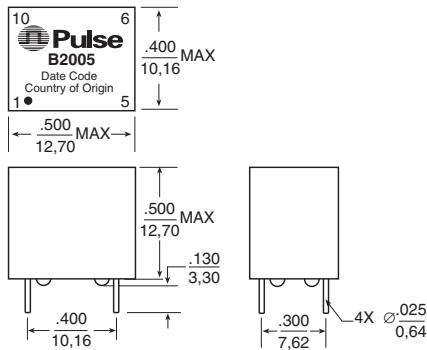


Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0,13}$

Weight3.7 grams
Tube40/tube

B2005




23Z104

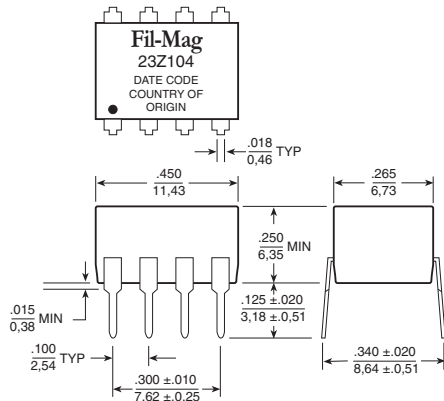


Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0,13}$

Weight1.0 grams
Tube50/tube

23Z104



23Z107




Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0,13}$

Weight0.45 grams
Tube100/tube

23Z107




42Z4000

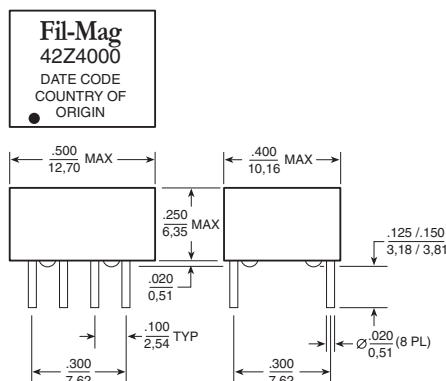

Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight1.5 grams
Tube47/tube

42Z4000



THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications




Pulse
A TECHNITROL COMPANY

Mechanicals

Schematics


PE-68613

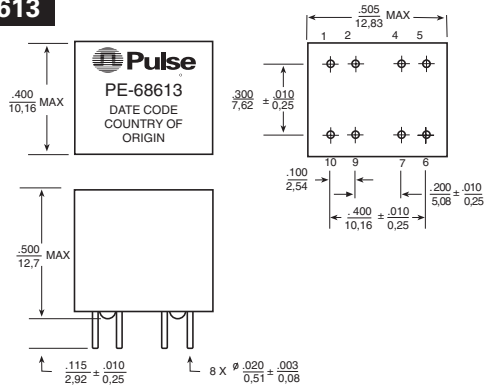



Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are ± .005
0.127

Weight 3.5 grams
Tube40/tube

PE-68613



J0010D11 - Filtered Connector

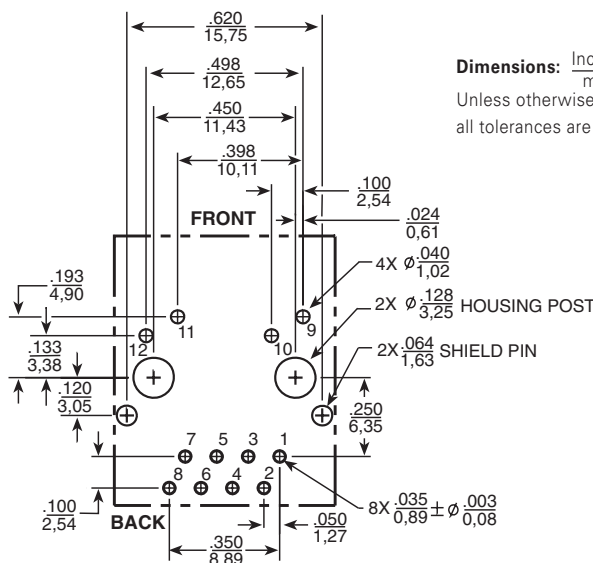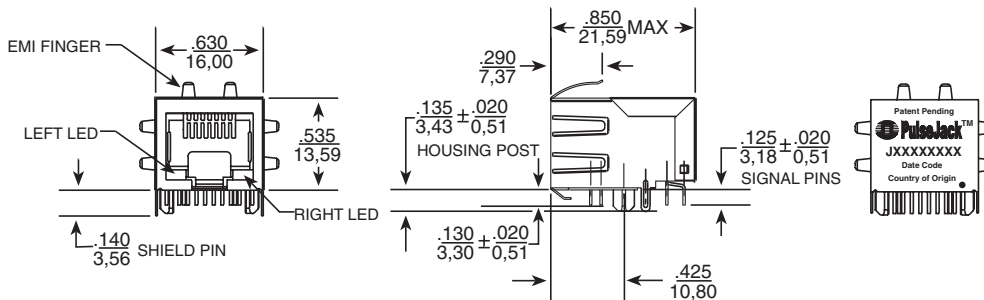


Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are ± .010
0.25

THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications



Common Mode Test Circuit for Surface Mount and Through Hole

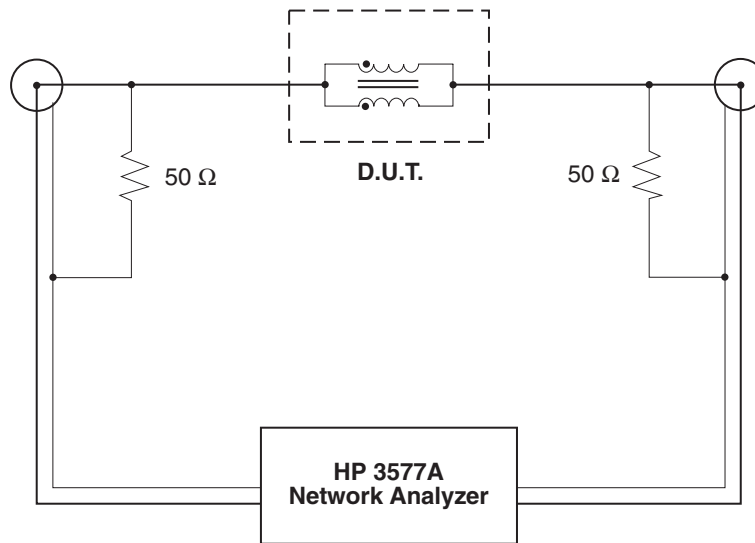

Test Notes:

1. Network analyzer calibrated to compensate for 50 Ω resistors.
2. All windings on a core are connected in parallel for the test.
3. For multi-core chokes, test data is for one core only. The windings on the other core(s) are left unconnected (i.e. open).

For More Information:

Pulse Worldwide Headquarters	Pulse Europe	Pulse China Headquarters	Pulse North China	Pulse South Asia	Pulse North Asia
12220 World Trade Dr. San Diego, CA 92128 U.S.A.	Einsteinstrasse 1 D-71083 Herrenberg Germany	B402, Shenzhen Tech-Innovation International Tenth Kejinan Rd. High-Tech Industrial Park Nanshan District, Shenzhen China	Room 1503 XinYin Building No. 888 YiShan Rd. Shanghai 200233 China	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324	No. 26, Kao Ching Rd. Yang Mei Chen Taoyuan Hsien Taiwan R. O. C.
Tel: 858 674 8100 Fax: 858 674 8262	Tel: 49 7032 7806 0 Fax: 49 7032 7806 135	Tel: 86 755 33966678 Fax: 86 755 33966700	Tel: 86 21 54643211/2 Fax: 86 21 54643210	Tel: 65 6287 8998 Fax: 65 6280 0080	Tel: 886 3 4641811 Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.
© Copyright, 2008. Pulse Engineering, Inc. All rights reserved.