




MYRRA - SERIE 44000 EI 30-10.5

Primary Voltage 117V

- * Vacuum filling
- * Two compartments bobbins
- * Self-extinguishing plastics UL 94 VO
- * Degree of protection IP 00
- * 70 grams weight
- * Resin class B CEI 85
- (20 000h testing to CEI 126)
- * Inherently short-circuits proof
- * Insulation voltage 4 KV
- (6 KV MYRRA test)
- * 30 V and 36 V models are VDE EN 60742 certified
- (Production on request)
- * 100% tested production
- * Certification : CCA procedure on request

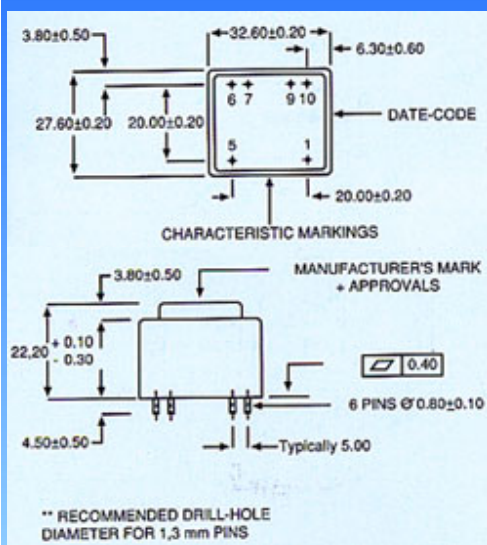

Reference	Secondary Voltage V	Secondary Current m A	No-load Voltage V	Ambient, Temperature C	Rating VA
44061	6	167	8,6	T 70 B	1
44062	9	111	12,9	T 70 B	1
44063	12	83	17,2	T 70 B	1
44064	15	67	21,6	T 70 B	1
44065	18	56	25,9	T 70 B	1
44066	24	42	37,9	T 70 B	1
44067	2 x 6	2 x 83	2 x 8,6	T 70 B	1
44068	2 x 9	2 x 56	2 x 12,9	T 70 B	1
44069	2 x 12	2 x 42	2 x 19	T 70 B	1
44070	2 x 15	2 x 33	2 x 23,6	T 70 B	1
44071	2 x 18	2 x 28	2 x 24,9	T 70 B	1
44072	2 x 24	2 x 21	2 x 37,9	T 70 B	1
44714	6	200	8,3	T 50 B	1,2
44715	9	133	12,5	T 50 B	1,2
44716	12	100	16,6	T 50 B	1,2
44717	15	80	20,8	T 50 B	1,2
44718	18	67	25,7	T 50 B	1,2
44719	24	50	33,3	T 50 B	1,2
44720	2 x 6	2 x 100	2 x 8,3	T 50 B	1,2
44721	2 x 9	2 x 67	2 x 12,5	T 50 B	1,2
44722	2 x 12	2 x 50	2 x 16,6	T 50 B	1,2
44723	2 x 15	2 x 40	2 x 20,8	T 50 B	1,2
44724	2 x 18	2 x 33	2 x 25	T 50 B	1,2
44725	2 x 24	2 x 25	2 x 33,3	T 50 B	1,2
44495	6	200	8,3	T 40 B	1,2
44496	9	133	12,5	T 40 B	1,2
44497	12	100	16,6	T 40 B	1,2
44498	15	80	20,8	T 40 B	1,2
44499	18	67	25,7	T 40 B	1,2
44707	24	50	33,3	T 40 B	1,2
44708	2 x 6	2 x 100	2 x 8,3	T 40 B	1,2
44709	2 x 9	2 x 67	2 x 12,5	T 40 B	1,2

44710	2 x 12	2 x 50	2 x 16,6	T 40 B	1,2
44711	2 x 15	2 x 40	2 x 20,8	T 40 B	1,2
44712	2 x 18	2 x 33	2 x 25	T 40 B	1,2
44713	2 x 24	2 x 25	2 x 33,3	T 40 B	1,2

Primary Voltage 230 V

Reference	Secondary Voltage V	Secondary Current m A	No-load Voltage V	Ambient, Temperature C	Rating VA
44049	6	167	8,6	T 70 B	1
44050	9	111	12,9	T 70 B	1
44051	12	83	17,2	T 70 B	1
44052	15	67	21,6	T 70 B	1
44053	18	56	25,9	T 70 B	1
44054	24	42	37,9	T 70 B	1
44055	2 x 6	2 x 83	2 x 8,6	T 70 B	1
44056	2 x 9	2 x 56	2 x 12,9	T 70 B	1
44057	2 x 12	2 x 42	2 x 19	T 70 B	1
44058	2 x 15	2 x 33	2 x 23,6	T 70 B	1
44059	2 x 18	2 x 28	2 x 24,9	T 70 B	1
44060*	2 x 24	2 x 21	2 x 37,9	T 70 B	1
44636	6	200	8,3	T 50 B	1,2
44637	9	133	12,5	T 50 B	1,2
44638	12	100	16,6	T 50 B	1,2
44639	15	80	20,8	T 50 B	1,2
44640	18	67	25,7	T 50 B	1,2
44641	24	50	33,3	T 50 B	1,2
44642	2 x 6	2 x 100	2 x 8,3	T 50 B	1,2
44643	2 x 9	2 x 67	2 x 12,5	T 50 B	1,2
44644	2 x 12	2 x 50	2 x 16,6	T 50 B	1,2
44645	2 x 15	2 x 40	2 x 20,8	T 50 B	1,2
44646	2 x 18	2 x 33	2 x 25	T 50 B	1,2
44482	2 x 24	2 x 25	2 x 33,3	T 50 B	1,2
44625	6	200	8,3	T 40 B	1,2
44626	9	133	12,5	T 40 B	1,2
44627	12	100	16,6	T 40 B	1,2
44628	15	80	20,8	T 40 B	1,2
44629	18	67	25,7	T 40 B	1,2
44630	24	50	33,3	T 40 B	1,2
44631	2 x 6	2 x 100	2 x 8,3	T 40 B	1,2
44632	2 x 9	2 x 67	2 x 12,5	T 40 B	1,2
44633	2 x 12	2 x 50	2 x 16,6	T 40 B	1,2
44634	2 x 15	2 x 40	2 x 20,8	T 40 B	1,2
44635	2 x 18	2 x 33	2 x 25	T 40 B	1,2

44481*	2 x 24	2 x 25	2 x 33,3	T 40 B	1,2
--------	--------	--------	----------	--------	-----