

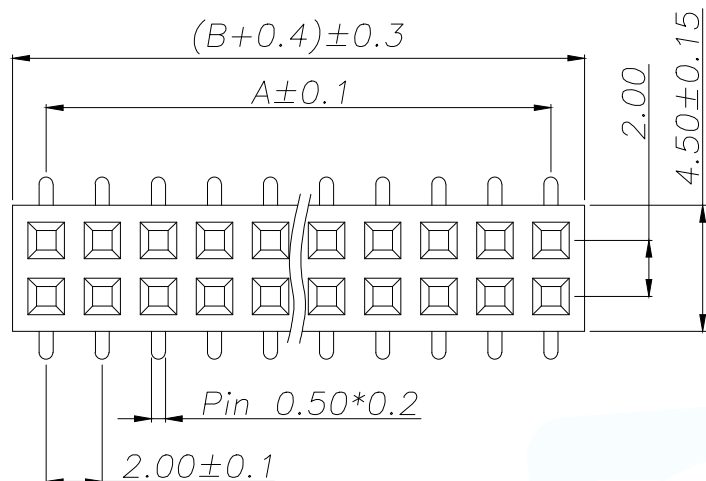
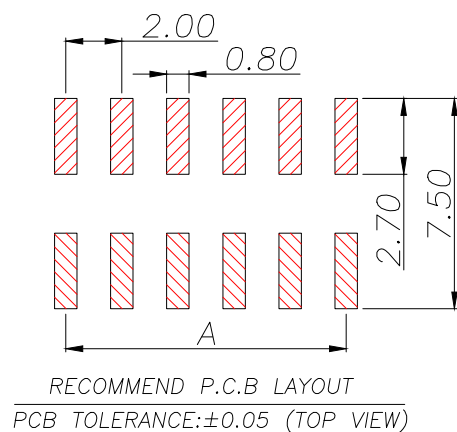


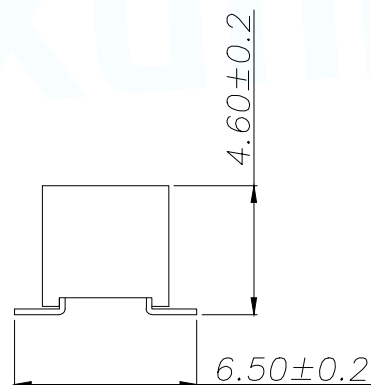

SPECIFICATIONS

Current Rating: 1.5 Amps
Insulation Resistance: 1000M Ω Min
Contact Resistance: 20m Ω Max
Withstanding Voltage: AC 500V
Operation Temperature: -40 $^{\circ}$ to+105 $^{\circ}$
Contact Material: Brass
Standard: PA6T
Insulator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 240 $^{\circ}$ C for30-60seconds
(260 $^{\circ}$ C for 5 seconds)

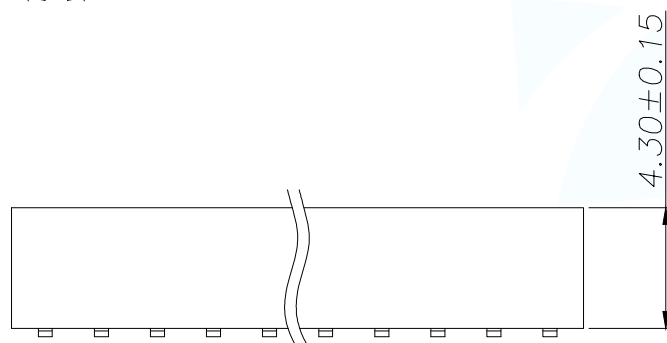

PCB TOLERANCE:±0.05 (TOP VIEW)

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

P/N	PIN	DIM.A	DIM.B
B200M05-0B2P51R-H43C65	2*1	0.00	2.00
B200M05-0B4P51R-H43C65	2*2	2.00	4.00
B200M05-0B6P51R-H43C65	2*3	4.00	6.00
B200M05-0B8P51R-H43C65	2*4	6.00	8.00
B200M05-0B10P51R-H43C65	2*5	8.00	10.00
B200M05-0B12P51R-H43C65	2*6	10.00	12.00
B200M05-0B14P51R-H43C65	2*7	12.00	14.00
B200M05-0B16P51R-H43C65	2*8	14.00	16.00
B200M05-0B18P51R-H43C65	2*9	16.00	18.00
.....			
B200M05-0B80P51R-H43C65	2*40	(40-1)x2.0	(40)x2.0

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd			
X.X ±0.30	X.* ±5°	PART NO.	TITLE:2.0FH H4.3 2xnPin		
.XX ±0.20	X.X* ±1°	B200M05-0BXP51R-H43C65	SMT W4.5 U型 PC6.5 PB4.6		
.XXX ±0.10	X.XX* ±0.5°	DESIGN: Ethan	MANUFACTURE DWG		
UNITS	mm	CHED: Olvia			
MATERILA	— — —	APPD: Ava			
FINISH	— — —		SCALE	SHEET	
			N:A	1/1	