

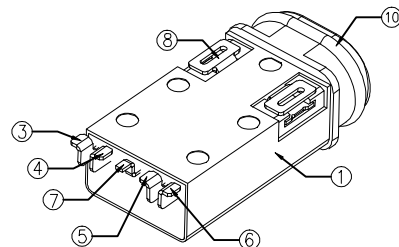
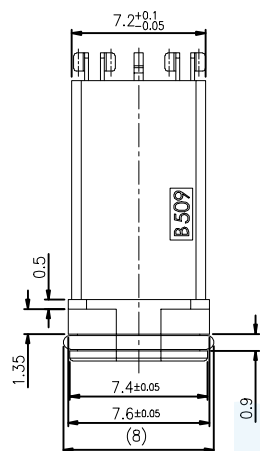
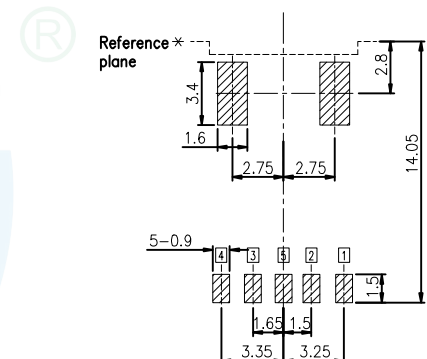

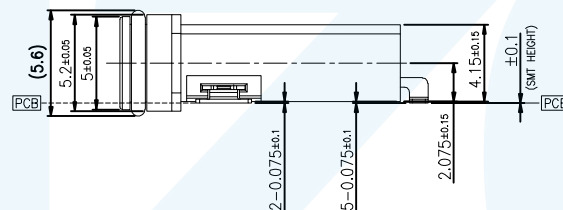




RoHS
Compliant



3D VIEW





Recommended PCB Layout
Tolerance: ±0.1(Top view)

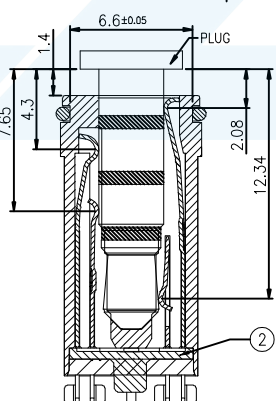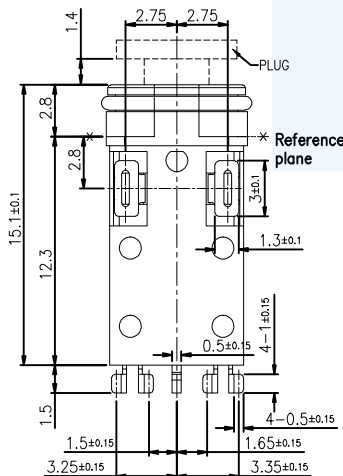

SEC:A-A
Image of plug match with contact point

□ : TERMINAL NO. ○ : ITEM NO.



10	OVAL RING	----	----	1
9	BOND	----	----	1
8	TERMINAL	Copper alloy t=0.2	1st:Ni(1μm or more),2nd:Sn(MIN 2μm or more)Plating	2
7	TIP SPRING-2 [5]	Copper alloy t=0.2	1st:Ni(1μm or more),2nd:Sn(MIN 0.03μm or more)Plating	1
6	RING SPRING-2 [4]	Copper alloy t=0.2	1st:Ni(1μm or more),2nd:Sn(MIN 0.03μm or more)Plating	1
5	RING SPRING-1 [3]	Copper alloy t=0.2	1st:Ni(1μm or more),2nd:Sn(MIN 0.03μm or more)Plating	1
4	TIP SPRING-1 [2]	Copper alloy t=0.2	1st:Ni(1μm or more),2nd:Sn(MIN 0.03μm or more)Plating	1
3	EARTH SPRING [1]	Copper alloy t=0.2	1st:Ni(1μm or more),2nd:Sn(MIN 0.03μm or more)Plating	1
2	COVER	PA9T 94V-0	COLOR BLACK	1
1	HOUSING	PA9T 94V-0	COLOR BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

LZG

LZG INDUSTRIAL CO. LTD

DRAWING:	林生财	DATE:	2020.02.18	SCALE:	1:1
CHECK:	李宏鑫	DATE:	2020.02.18	MATERIAL:	*
APPROVAL:	杨进宝	DATE:	2020.02.18	DWG. NO.	
DRAWING NO.	ZB23009-07SBAP-A			SHEET	1/1

PART NAME	WATERPROOF Ø3.5 PHONE JACK	TOLERANCE UNLESS	0.0±0.30	0.°±2°	UNIT:	
PART NO.	ZB23009-07SBAP-A	OTHERWISE SPECIFIED:	0.00±0.20	0.0°±1°	mm	