

1. Description


The TP5531/5532 low-power chopper stabilized operational amplifiers provide input offset voltage correction for very low offset and offset drift over time and temperature. The devices operate with a single supply voltage as low as 1.8V, while drawing 34µA per amplifier of quiescent current with a gain bandwidth product of 350kHz. They are unity gain stable, have no 1/f noise, have good Power Supply Rejection Ratio (PSRR) and Common Mode Rejection Ratio (CMRR), and feature rail-to-rail input and output swing.

3. Applications

- Transducer Amplifier
- Bidirectional Current Sense
- DC Offset Correction
- Temperature Measurement
- Remote Located Sensors
- Battery-Powered Instruments
- Electronic Weigh Scales

2. Features

- Low Offset Voltage: 10µV (Max)
- Zero Drift: 0.008µV/°C
- 0.1Hz to 10Hz Noise: 1.1µV_{PP}
- Low Supply Current: 34µA per Amplifier
- Bandwidth: 350kHz
- Slew Rate: 0.16V/µs
- High Gain, 130dB High CMRR and PSRR
- Rail-to-rail Input and Output Swing
- -40°C to 125°C Operation Range

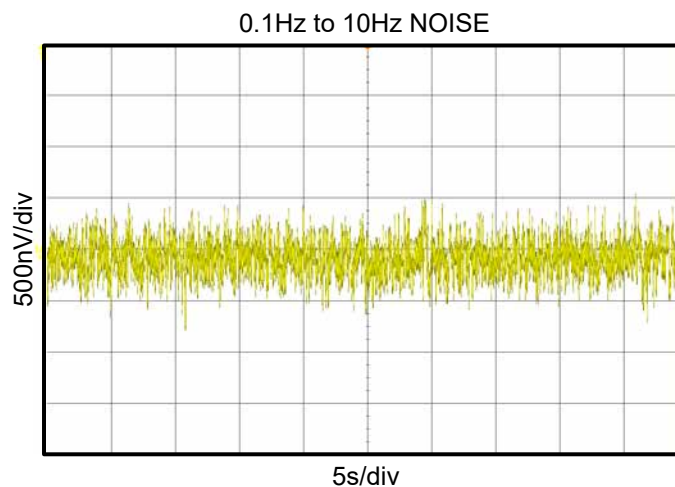



4. Absolute Maximum Ratings $T_A = 25^\circ\text{C}$

Parameter	Value
Supply Voltage	6V
Input Voltage	$V^- - 0.2$ to $V^+ + 0.2$
Input Current: +IN, -IN ^{Note 2}	$\pm 20\text{mA}$
Output Current: OUT	$\pm 60\text{mA}$
Output Short-Circuit Duration ^{Note 3}	Indefinite
Current at Supply Pins	$\pm 50\text{mA}$
Operating Temperature Range	-40°C to 125°C
Maximum Junction Temperature	150°C
Storage Temperature Range	-65°C to 150°C
Lead Temperature (Soldering, 10 sec)	260°C


Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: The inputs are protected by ESD protection diodes to each power supply. If the input extends more than 500mV beyond the power supply, the input current should be limited to less than 10mA.


Note 3: A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many amplifiers are shorted. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.




5. Pinning Information

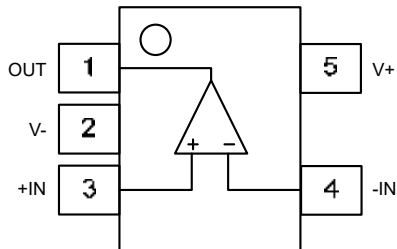

TP5531
SOT23-5

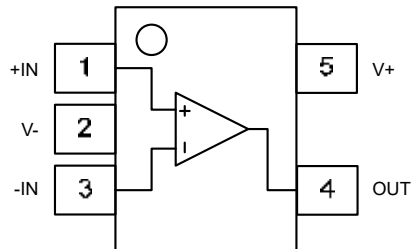

TP5531U
SC70-5

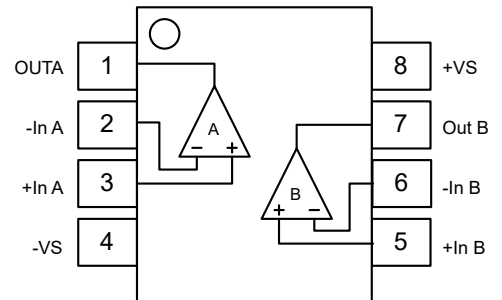

TP5532
SOP-8

6. ESD, Electrostatic Discharge Protection

Parameter	Symbol	Condition	Min	Units
Human Body Model ESD	HBM	MIL-STD-883H Method 3015.8	7	kV
Charged Device Model ESD	CDM	JEDEC-EIA/JESD22-C101E	2	kV



7. Electrical Characteristics

The boldface denotes the specifications which apply over the full operating temperature range $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$. At $T_A = 27^\circ\text{C}$, $V_{DD} = 5\text{V}$, $R_L = 10\text{k}\Omega$, $V_{CM} = V_{DD}/2$, unless otherwise noted.

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Supply Voltage Range	V_{DD}		1.8		5.5	V
Quiescent current per amplifier	I_Q	$I_O = 0$		34	40	μA
Over temperature					55	μA
Input Offset Voltage	V_{OS}	Input grounded, unity gain		2	10	μV
vs temperature	dV_{OS}/dT			0.008	0.05	$\mu\text{V}/^\circ\text{C}$
vs power supply	PSRR	$V_S = +1.8\text{V}$ to $+5.5\text{V}$		0.5		$\mu\text{V}/\text{V}$
input voltage noise, $f = 0.01\text{Hz}$ to 1Hz	V_n			0.4		μV_{pp}
input voltage noise, $f = 0.1\text{Hz}$ to 10Hz				1.1		μV_{pp}
Input voltage noise density, $f = 1\text{kHz}$	e_n			55		$\text{nV}/\sqrt{\text{Hz}}$
Input capacitor, Differential	C_{IN}			3		pF
Input capacitor, Common-Mode				2		pF
Input Bias Current	I_B			± 50	± 200	pA
Over temperature					800	pA
Input offset current	I_{OS}			± 100	± 400	pA
Common-mode voltage range	V_{CM}		$(V_-) - 0.1$		$(V_+) + 0.1$	V
Common-mode rejection ratio	CMRR		110	130		dB
Output Voltage Swing from rail	V_O	$R_L = 10\text{k}\Omega$		5	10	mV
Over temperature		$R_L = 10\text{k}\Omega$			10	mV
Short-circuit current	I_{SC}				± 60	mA
Maximum Capacitive Load	C_L			1000		pF
Unity Gain Bandwidth	GBWP	$C_L = 100\text{pF}$		350		kHz
Slew rate	SR	$G = +1$, $C_L = 100\text{pF}$		0.16		$\text{V}/\mu\text{s}$
Overload recovery time	t_{OR}	$G = -10$		60		μs
Settling time to 0.01%	t_S	$C_L = 100\text{pF}$		40		μs



Parameter	Symbol	Conditions	Min	Typ	Max	Units
Open-Loop Voltage Gain	A_{VOL}	$(V_-)+100mV < V_o < (V_+)-100mV$ $R_L=100k\Omega$	100	120		dB
Thermal Resistance Junction to Ambient	θ_{JA}	SC70-5 (SOT3530)		250		$^{\circ}C/W$
		SOT23-5		200		$^{\circ}C/W$
		SOP-8		158		$^{\circ}C/W$



8.1 Typical characteristic

<p>Figure 1: Offset Voltage Distribution</p>	<p>Figure 2: Offset Voltage vs Temperature</p>
<p>Figure 3: Open-Loop Gain vs Frequency</p>	<p>Figure 4: CMRR vs Frequency</p>
<p>Figure 5: PSRR vs Frequency</p>	<p>Figure 6: Output Swing vs Load Current</p>




8.2 Typical characteristic

<p>Figure 7: IB vs Common-mode Voltage</p>	<p>Figure 8: Input Bias vs Temperature</p>
<p>Figure 9: Vos vs Common-mode Voltage</p>	<p>Figure 10: Quiescent Current vs Temperature</p>
<p>Figure 11: Quiescent Current Distribution</p>	<p>Figure 12: Large-Scale Step Response</p>




8.3 Typical characteristic

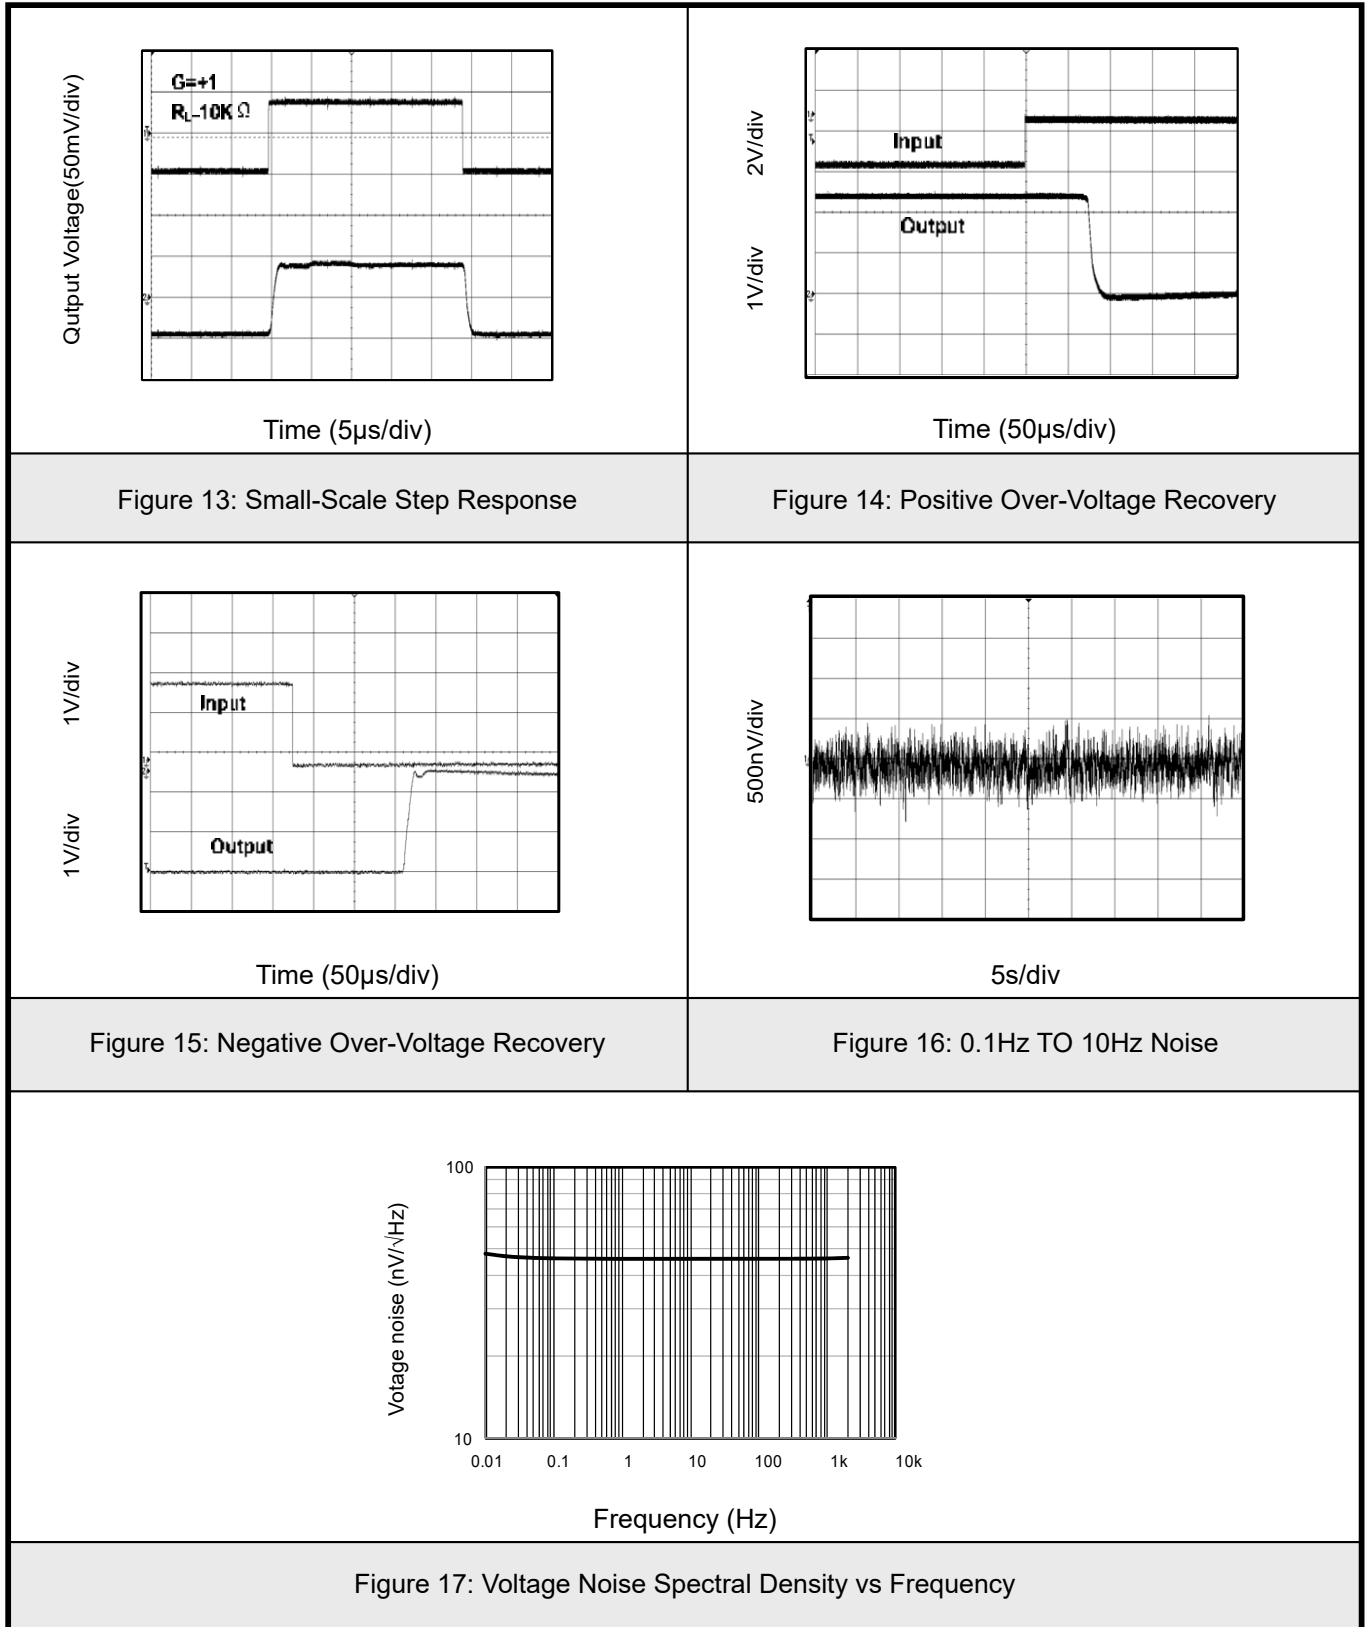



9.1 SOT-23-5 Package Outline Dimensions

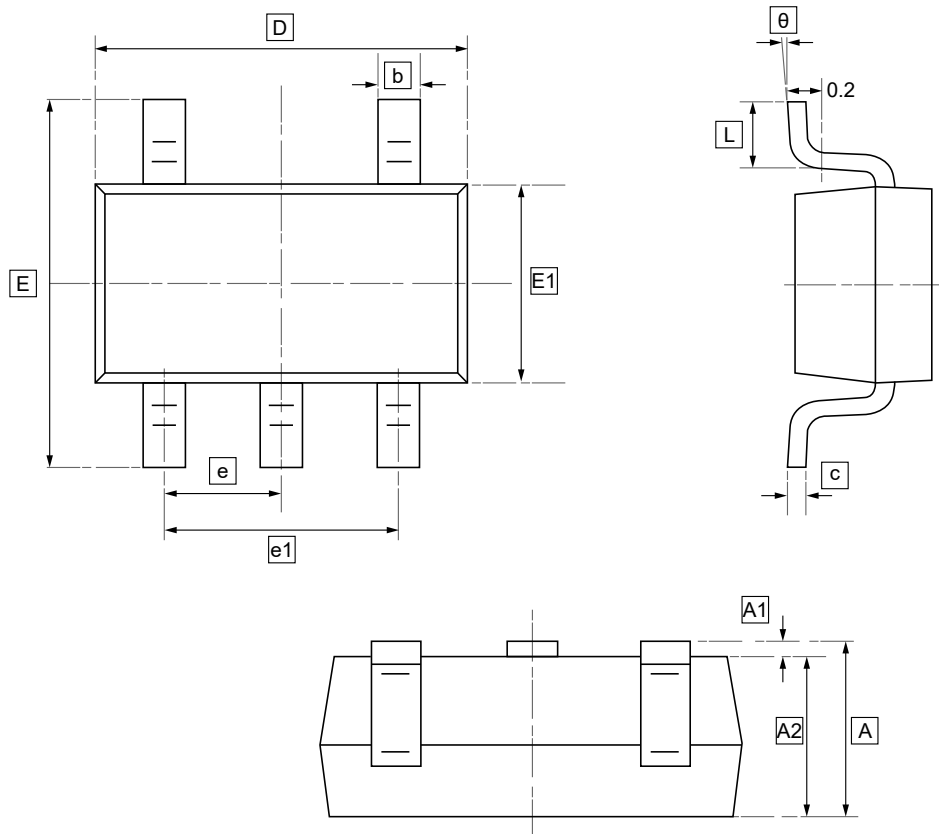


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E1	E	e	e1	L	θ
Min	1.050	0.000	1.050	0.300	0.100	2.820	1.500	2.650	0.950	1.800	0.300	0°
Max	1.250	0.100	1.150	0.500	0.200	3.020	1.700	2.950	BSC	2.000	0.600	8°



9.2 SC70-5 Package Outline Dimensions

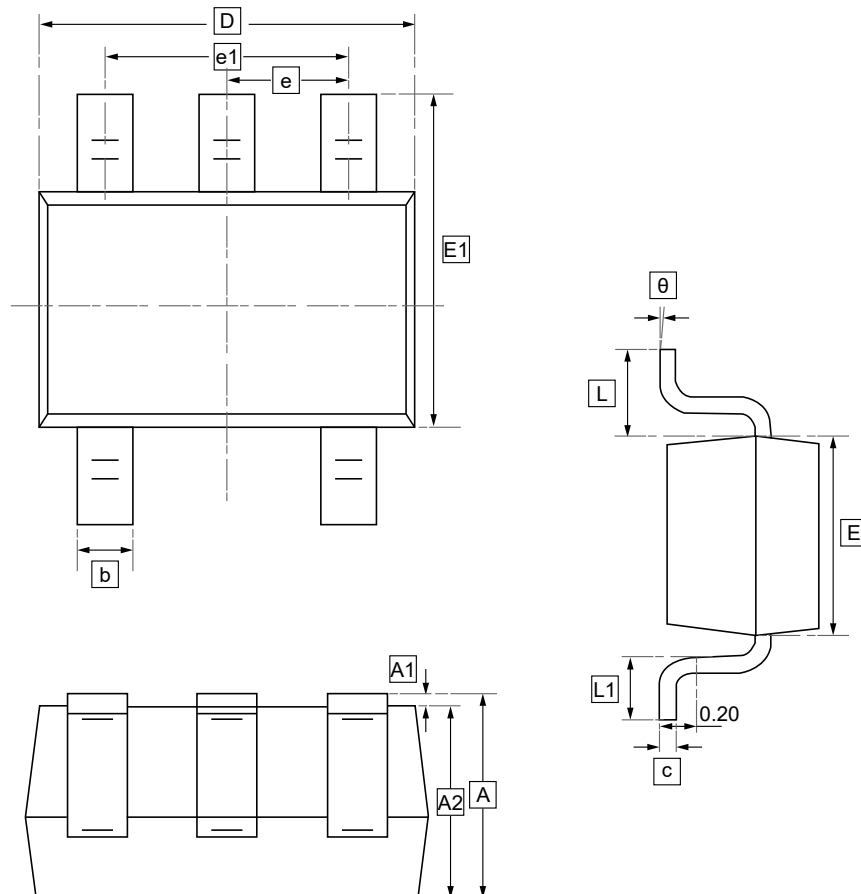


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	e1	L	θ
Min	0.90	0.00	0.90	0.15	0.08	2.05	1.15	2.15	0.65	1.20	0.26	7°
Max	1.10	0.10	1.00	0.35	0.15	2.25	1.35	2.45	TYP	1.40	0.46	REF.



9.3 SOP-8 Package Outline Dimensions

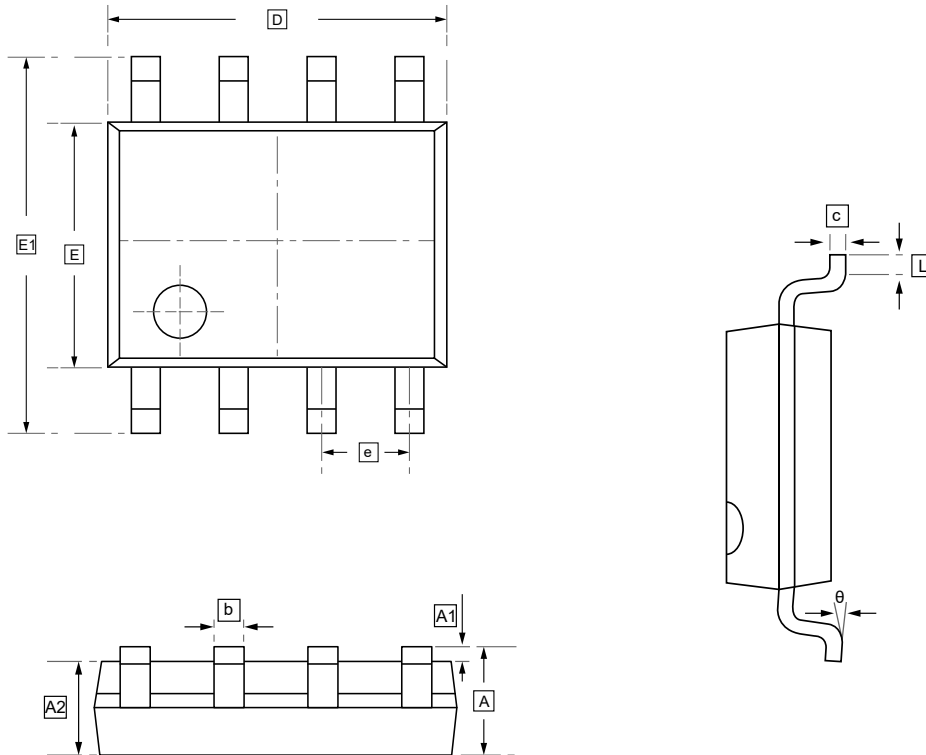


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	L	θ
Min	1.350	0.000	1.350	0.330	0.170	4.700	3.800	5.800	1.270	0.400	0°
Max	1.750	0.100	1.550	0.510	0.250	5.100	4.000	6.200	BSC	1.270	8°



10. Ordering Information



yww: Batch Code

Order Code	Marking	Package	Base QTY	Delivery Mode
UMW TP5531-TR	E31TGR	SOT23-5	3000	Tape and reel
UMW TP5531U-CR	31VG ∩	SC70-5	3000	Tape and reel
UMW TP5532-SR	TP5532	SOP-8	2500	Tape and reel



11.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.