


DATE	REVISIONS	REV
8-30-93	CHG'D LEAD LENGTH/	A
7-14-94	CHG'D SOLDER SPECS/	B
8-16-94	CHG'D HOLDER BOTTOM & SAFE OP. SPECS.	C
11-29-94	UPDATED SPECS./	D
2-9-95	CHG'D. HOLDER BOTTOM./	E
10-9-95	REF ECN 10100./	F
2-6-96	REF ECN 10104./	G

DRAWING NUMBER
SSF-LXH240YGYGW

REV
G


ELECTRO-OPTICAL CHARACTERISTICS TA=25 °C I_f=20mA

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		585 (YELLOW)		nm	
		565 (GREEN)		nm	
FORWARD VOLTAGE (Y/G)		2.1	2.8	V _f	
REVERSE VOLTAGE	N/A			V _r	I _r =100uA
AXIAL INTENSITY (Y/G)		8.0		mcd	I _f =20mA
VIEWING ANGLE		80		2x theta	
EMITTED COLOR:		YELLOW/GREEN			
EPOXY LENS FINISH:		MILKY WHITE DIFFUSED			

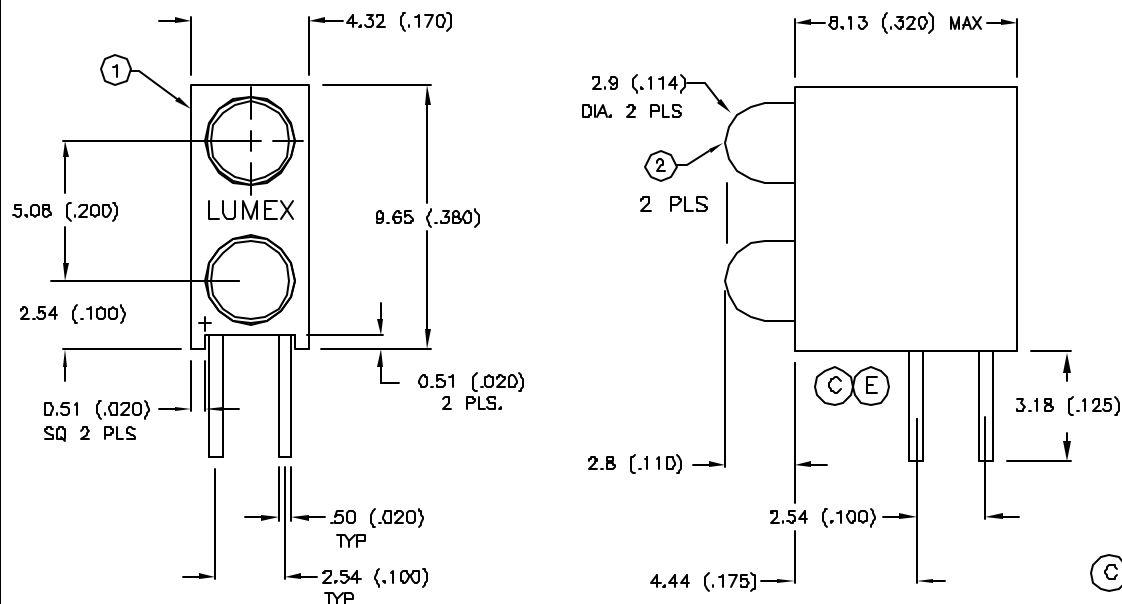

PIN-OUT

- A. BICOLOR LED - YELLOW ANODE
- B. BICOLOR LED - GREEN ANODE
- C. BICOLOR LED - YELLOW ANODE
- D. BICOLOR LED - GREEN ANODE



BILL OF MATERIALS:

- SSH-LXH240 HOLDER. MATERIAL: BLACK NYLON 94V-0.
- SSL-LX3044YGW LED (2 PIECES).

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

Ⓓ

LIMITS OF SAFE OPERATION AT 25 DEG. C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT (Y/G)*	150/150	mA
STEADY CURRENT (Y/G)	30/25	mA
POWER DISSIPATION (Y/G)	105/105	mW
DERATE FROM 25 °C	-1.2	mW/°C
OPERATING, STORAGE TEMP.	-40 TO +85	°C
LEAD SOLDERING TEMP.	+260	°C
2.0mm FROM BODY		3 SEC. MAX

* t<10μs

LUMEX
OPTO COMPONENTS INC.

282 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
(708) 359-2790

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX OPTO/COMPONENTS, INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX OPTO/COMPONENTS, INC. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 1-19-93	DWN:	CHK'D:	APPD:
SCALE: N/A			

T-3mm LED, RICH TANGLE FAULT INDICATOR,
BICOLOR UPPER & LOWER, MILKY WHITE EPOXY

PAGE 1 OF 1

DRAWING NUMBER
SSF-LXH240YGYGW

REV
G

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

[SSF-LXH240YGYGW](#)