



1.View and size(视图及尺寸)

Main technical indicators(主要技术指标)	
1.Mating (插拔次数)	5000
2.Working Temperature (温度)	-55~+150 ℃
3.IP Rating (防护级别)	IP 50
4.Diameter of socket end(插合端直径)	φ0.9
5.Testing Voltage (测试电压)	1500V
6.Working Voltage (工作电压)	1250V
7.Rated Current (额定电流)	10A
8.Shell material(壳体材质)	Brass (chromium plating)/(nickel plating) fixation ring/ 黄铜 (镀铬) / (镀镍) 固定圈
9.Pin Material(插针材料)	Copper alloy gold plating(铜合金镀金)
10.Insulator material(绝缘体材质)	PPS

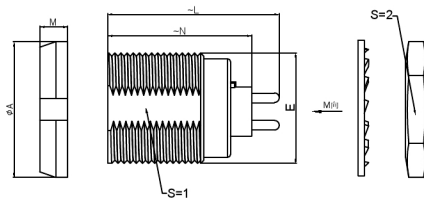


	A	N	L	E	M	S1	S2
MM	φ20	21.5	24.8	M15*1	3.5	13.5	17
in	0.79	0.85	0.98		0.14	0.53	0.67

Sum up(总结)	
Series(系列)	B
Shell style/model (外壳样式/型号)	ZCG-VWith two nuts (fixed back and forth)带有两个螺母 (前后固定)
Button (按键)	A button(一个按键)
Termination type (终止类型)	Female print PCB(印刷PCB)
Line diameter awg(线材直径)	30-22AWG
Cable diameterφ (电缆直径)	0-0
Match plug(匹配插头)	TGG.2B.P08.CLNAD52H




Pcb plate opening size
(PCB板开孔尺寸)




Pane hole size
(面板开孔尺寸)

Location pin combination(定位销组合)				
(编号) Number	Number of positioning pins(定 位销数量)	Angle(角 度)	Series(系列)~2B	
G	One(1)		(Zero degrees)0°	
A	Two(2)	A	Thirty degrees(30°)	
B	Two(2)		Forty-five degrees(45°)	
C	Two(2)		Sixty degrees(60°)	
D	Two(2)	Y	95 degrees (95°)	
E	Two(2)	β	120 degrees(120°)	
F	Two(2)		145 degrees(145°)	
J	Two(2)	A	37.5degrees(37.5°)	
K	Two(2)		52.5degrees(52.5°)	
L	Two(2)	Y	Seventy degrees(70°)	

	A	B	C/	ANGLE	
5-10	±0.02	±0.05	±0.1	0°-30°	±0.1°
50-100	±0.1	±0.15	±0.2	61°-90°	±0.5°
50-100	±0.15	±0.2	±0.25		
100-	±0.15%	±0.20%	±0.25%		



Boarded mother adhesive core
(板接型母胶芯)



Positive view of the socket
(插座正视图)

Model(型号)	ZC
Positioning pin(定位销)	G
Series(系列)	2B
Needle core configuration(针芯配置)	P08
Outer casing(外壳)	C
Insulator(绝缘体)	L
Needle core(针芯)	N

DESIGNED (设计)		DATE(日期)		SCALE(比例)	N/A(不适用)	MODEL TYPE 型号类型: ZCG.2B.P08.CLN
CHECKED (校对)		DATE(日期)		VIEW(视图)	⊕	PART NO. 2B8 core socket
APPROVED (审核)		DATE(日期)		UNIT(单位)	MM	名称: 2B8芯插座
REVISIONS				MATERIAL (材料)		DWG NO.:
www.helloxkb.com www.helloxkb.cn				KXB INDUSTRIAL PRECISION CO.,LIMITED		WEIGHT(重量) SHEET(页) REVISION(修订)
						1/1 A0