


SOT-23


- 1. BASE
- 2. EMITTER
- 3. COLLECTOR

FEATURES

- Ideally suited for automatic insertion
- For switching and AF amplifier applications

P/N MARKING

BC846A=1A; BC846B=1B;
 BC847A=1E; BC847B=1F; BC847C=1G;
 BC848A=1J; BC848B=1K; BC848C=1L

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)









Symbol	Parameter		Value	Unit
V_{CBO}	Collector-Base Voltage	BC846	80	V
		BC847	50	
		BC848	30	
V_{CEO}	Collector-Emitter Voltage	BC846	65	V
		BC847	45	
		BC848	30	
V_{EBO}	Emitter-Base Voltage		6	V
I_C	Collector Current –Continuous		0.1	A
P_C	Collector Power Dissipation		200	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient		625	$^{\circ}\text{C}/\text{W}$
T_J, T_{stg}	Operation Junction and Storage Temperature Range		-55~+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)


Parameter		Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	BC846	V _{CBO}	I _C = 10μA, I _E =0	80			V
	BC847			50			
	BC848			30			
Collector-emitter breakdown voltage	BC846	V _{CEO}	I _C = 10mA, I _B =0	65			V
	BC847			45			
	BC848			30			
Emitter-base breakdown voltage		V _{EBO}	I _E = 10μA, I _C =0	6			V
Collector cut-off current	BC846	I _{CBO}	V _{CB} =70 V , I _E =0			0.1	μA
	BC847		V _{CB} =50 V , I _E =0				
	BC848		V _{CB} =30 V , I _E =0				
Emitter cut-off current		I _{EBO}	V _{EB} =5 V , I _C =0			0.1	μA
DC current gain	BC846A,847A,848A	h _{FE}	V _{CE} = 5V, I _C = 2mA	110		220	
	BC846B,847B,848B			200		450	
	BC847C,BC848C			420		800	
Collector-emitter saturation voltage		V _{CE(sat)}	I _C =100mA, I _B = 5mA			0.5	V
Base-emitter saturation voltage		V _{BE(sat)}	I _C =100mA, I _B = 5mA			1.1	V
Transition frequency		f _T	V _{CE} = 5 V, I _C = 10mA f=100MHz	100			MHz
Collector output capacitance		C _{ob}	V _{CB} =10V,f=1MHz			4.5	pF

Typical Characteristics

Static Characteristic

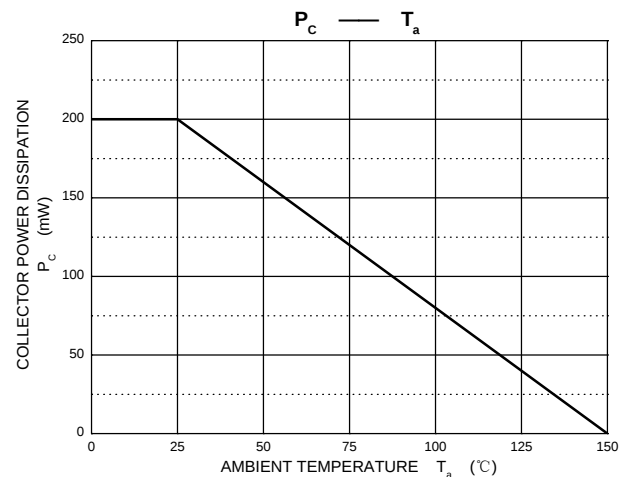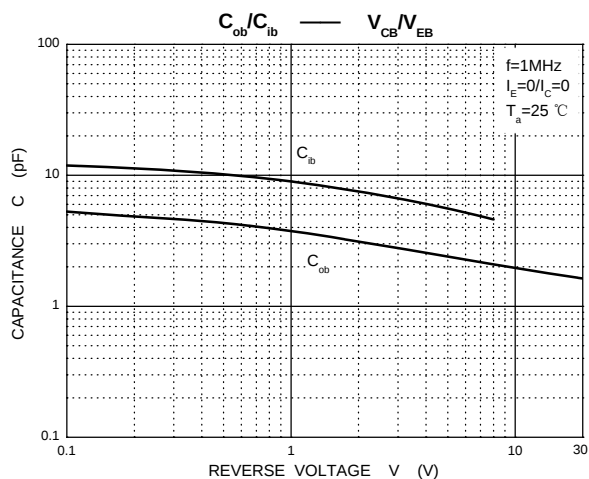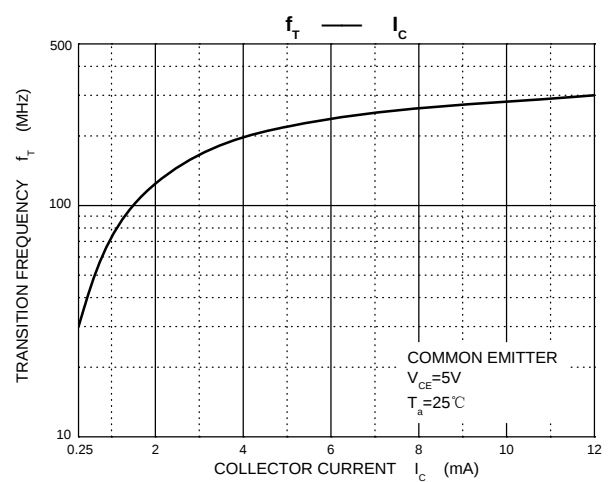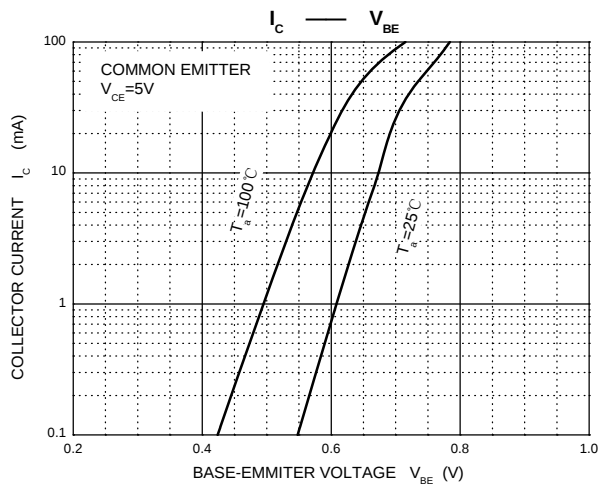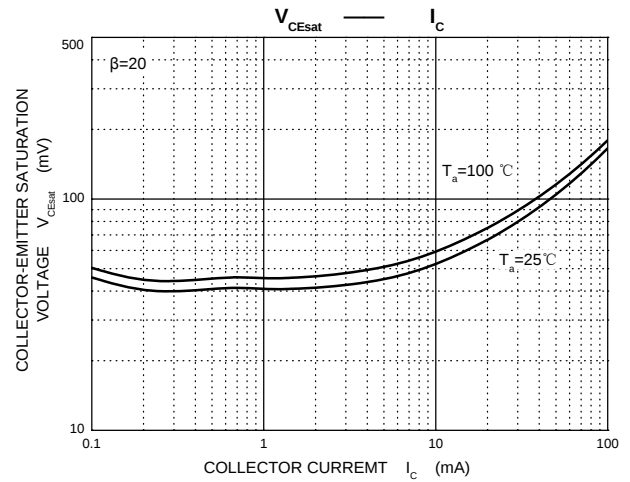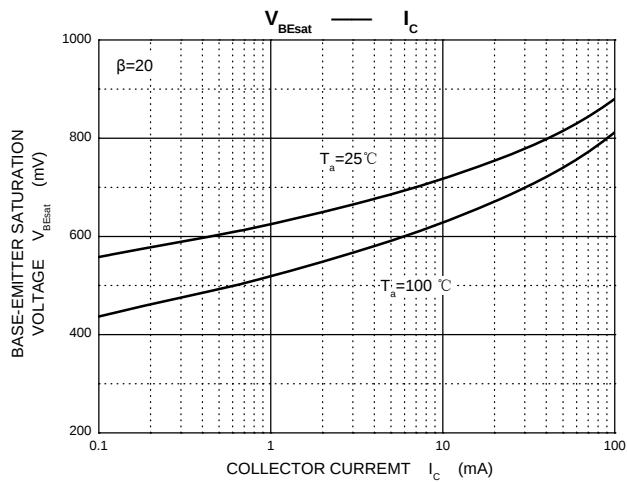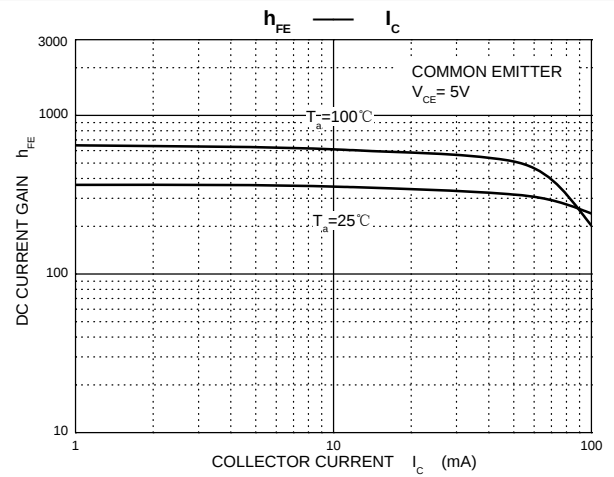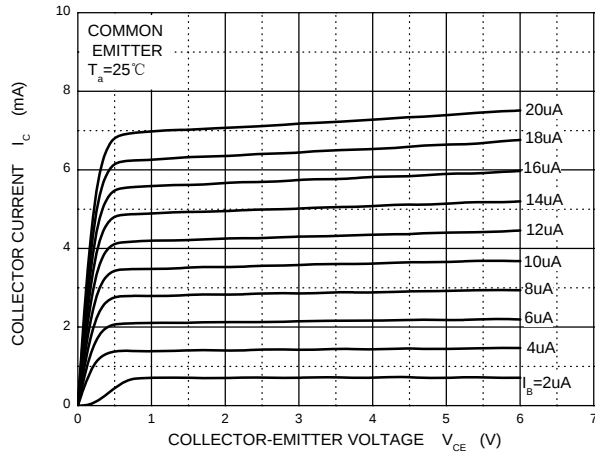


SOT-23 Package Outline Dimensions

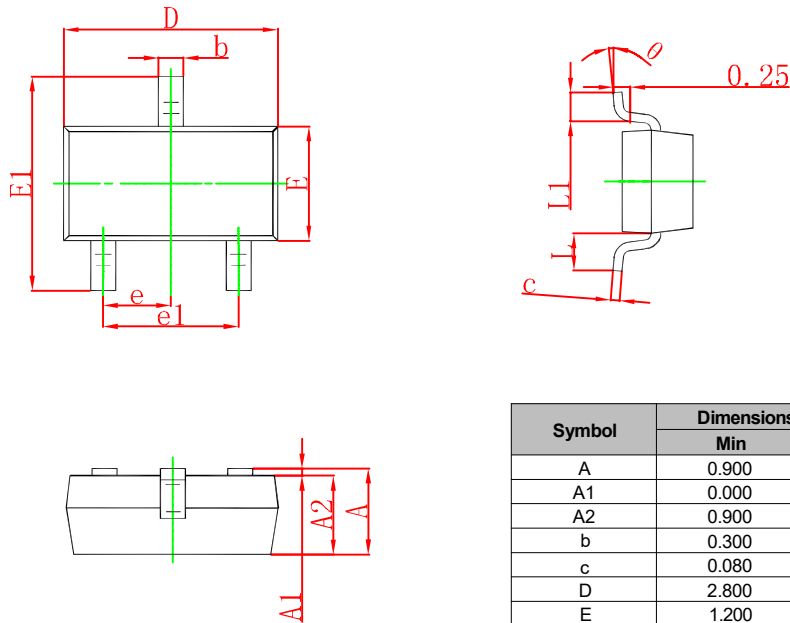

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout



Note:
1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05mm.
3. The pad layout is for reference purposes only.