

2 W

DC-12.4GHz


SMA

COAXIAL ATTENUATOR

issue
28.jul.93

Page
1 / 1

DRAWING

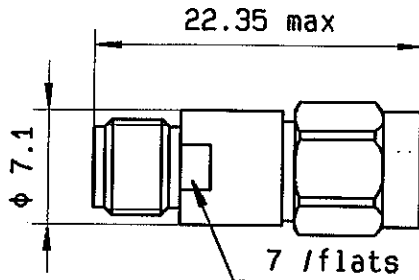

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 12.4 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 6 dB

FREQUENCY	DC- 4 GHz	4 -12.4GHz
V.S.W.R	<= 1.15	<= 1.25
DEVIATION (dB)	+0.3 / -0.3	+0.3 / -0.3


TEMPERATURE SENSITIVITY : 4×10^{-4} dB / (dB * °C)
 PEAK POWER at 25°C (1µs, 1%) : 100 W
 AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : SMA male/female per MIL-C 39012
 WEIGHT : < 5 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

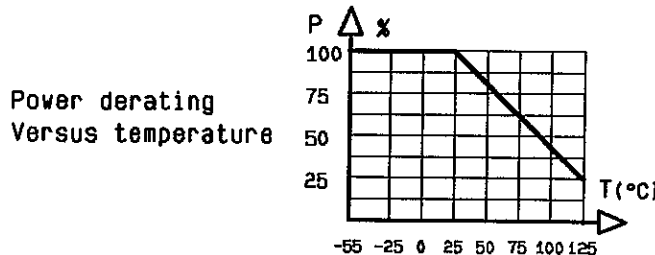

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9214

QUALITY Dpt app.	R4 B				
CREATION					
PEN : CAT					
EP : -----					
Nom : DP	28.jul.93	New format		VE	
Date: 02.mar.89	ISSUE		REVISIONS	NAME	

RADIALL®

101, Philibert Hoffmann - Z.I Oubst -
 93116 ROSNY/BOIS Cedex-FRANCE
 Phone: 33.1.49363535
 Fax : 33.1.48546363
 Twx RADIA 235220F