
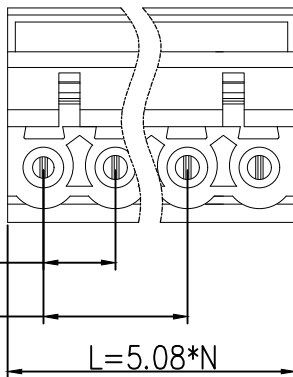




标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

Materials and Electroplating

- ①. Screw: M2.5, iron, galvanized, straight groove
②. Plastic body: PA66
③. Clip: Copper, nickel plated
④. Square box: iron, nickel plated
⑤. Plastic cover plate: PA66
Electrical performance
Rated voltage: 300V
Rated current: 15A
Contact resistance: 20m Ω (Max)
Insulation resistance: 500M Ω/DC500V
Voltage endurance: AC1500V/1Min
Wire diameter used: 28-12AWG
mechanical properties
Temperature range: -40 °C~+105 °C
Instantaneous temperature: +250 °C for 5 seconds
Torque: 0.4Nm (3.6 Ib. in)
Stripping length: 7-8mm

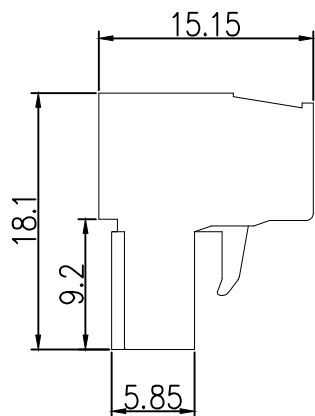

$$P=5.08*(N-1)$$

$$L=5.08*N$$

2	方盒	铁	镀镍	
1	底座	PA66	绿色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司		品 名	接线端子																
			TITLE																	
			料 号	HC-JXDZK-5.08-4P-A																
			PART NO																	
GENERAL TOLERANCES (UNLESS SPECIFIED)			比 列	1 : 1																
			单 位	MM	制 图															
			UNIT		DRAW															
<table border="1"><tr><th colspan="3">公差参数</th></tr><tr><th>2-6P</th><th>±0.10</th><th>±0.20</th></tr><tr><th>7-12P</th><th>±0.20</th><th>±0.30</th></tr><tr><th>13-18P</th><th>±0.25</th><th>±0.40</th></tr><tr><th>19-24P</th><th>±0.30</th><th>±0.50</th></tr></table>			公差参数			2-6P	±0.10	±0.20	7-12P	±0.20	±0.30	13-18P	±0.25	±0.40	19-24P	±0.30	±0.50	X. xxx ± 0.15	张 数	AhYe
			公差参数																	
2-6P	±0.10	±0.20																		
7-12P	±0.20	±0.30																		
13-18P	±0.25	±0.40																		
19-24P	±0.30	±0.50																		
			X. xx ± 0.25	1 OF 1	审 核															
			X. x ± 0.35	PART NO	CHECKED															
			版 本	夏操云																
			REV	批准		赵亮亮														
			A	APPROVE																