

602 / 802 GP Series - Double Row Terminal Blocks



602 GP 06

Double Row Terminal Blocks - 602 / 802 GP Series

Catalog #	# of Poles	Dimensions	
		A	B
602 GP 01	1	1.54	1.13
602 GP 02	2	2.10	1.69
602 GP 03	3	2.66	2.25
602 GP 04	4	3.22	2.81
602 GP 05	5	3.79	3.38
602 GP 06	6	4.35	3.94
602 GP 07	7	4.91	4.50
602 GP 08	8	5.47	5.06
602 GP 09	9	6.04	5.63
602 GP 10	10	6.60	6.19
602 GP 11	11	7.16	6.75
602 GP 12	12	7.72	7.31
602 GP 13	13	8.29	7.88
602 GP 14	14	8.85	8.44
602 GP 15	15	9.41	9.00
602 GP 16	16	9.97	9.56
602 GP 17	17	10.54	10.13
602 GP 18	18	11.10	10.69
602 GP 19	19	11.66	11.25
602 GP 20	20	12.22	11.81
602 GP 21	21	12.79	12.38
602 GP 22	22	13.35	12.94
602 GP 23	23	13.91	13.50
602 GP 24	24	14.47	14.06
602 GP 25	25	15.04	14.63
602 GP 26	26	15.60	15.19

mm = dim X 25.4

Specifications

- A Kulka® Brand
- 30 amps
- 300 Volts AC/DC, Class B/C
- 802 series (riveted construction) 150 volts AC/DC, Class C
- Base, phenolic, 150°C (UL RTI)
- JJ (GDI-30F) material available
- Screws, steel, #8-32 phil-slot
- Terminals, plated brass
- Open back design (Insulator strip required for voltage rating - [Reference](#))
- 1-26 poles at 9/16" centers
- Accepts lugs w/max width of .44"
- Bare wire range #10-#18 AWG

Standards

- UL recognized file no. XCFR2.E47811
- CSA certified file no. LR19766
- CE Compliant (IEC 60947-7-1)
- RoHS compliant


[Product Datasheet](#)

Hardware Options

(Hardware options may affect ratings - Consult Customer Service)

Catalog #	Product Description	Reference Sheet
KT55	Full Quick Connect (0° Flat)	Reference
KT56	Full Quick Connect (45° Bend)	
KT57	Full Quick Connect (90° Bend)	
KT61	Half Quick Connect (0° Flat)	
KT62	Half Quick Connect (45° Flat)	
KT63	Half Quick Connect (90° Flat)	Reference
ST	Full Solder	
3/4 ST	Half Solder	
Y	Feed Thru Solder (.500)	
YSY	Feed Thru Solder (.672)	
Z	Lug over the Side (.609)	Reference
J 602	Line-to-Line Jumper	
3786	Wire Clamp Screw	
2002	Stud	Reference
PSB	Phil-Slot Brass Screw	Consult Customer Service
	Covers - Top-Mounted	Reference
	Marking Strips & Insulator Strips - Sub-Mounted	Reference

Quick Connects: .032" x .250"

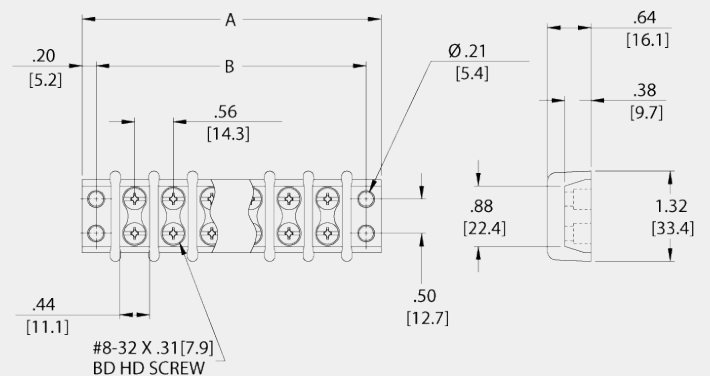

CONTACT

Marathon Special Products
427 Van Camp Road

LINKS

[About Us](#)

ABOUT

Marathon Special Products is an industry leader for supplying power blocks, terminal blocks, and fuse holders in North

P.O. Box 468
Bowling Green, Ohio 43402

tel: 419-352-8441
fax: 419-352-0875
email: marketing@marathonsp.com

CUSTOMER SERVICE HOURS

Mon-Fri 8am-5pm EST

Contact Us

Terms & Conditions

Locate a Distributor

America. We've achieved this by providing one of the broadest line offerings with various sizes, terminal styles, electrical ratings and features.

