

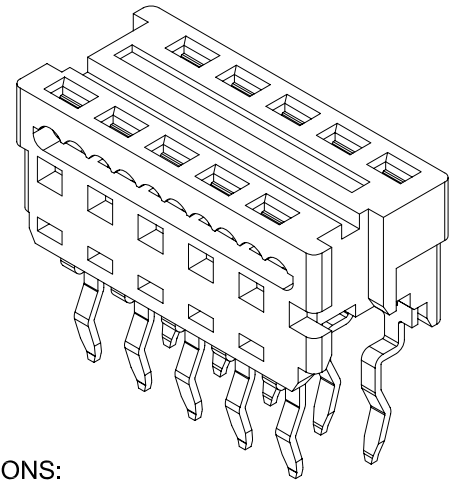


**Ordering Information:**  
**D1272HV-XP - \*  
 1 2**  
 1.Part No.  
 2.Material:  
 (Blank): Tin over Nickel  
 G: Gold over Nickel

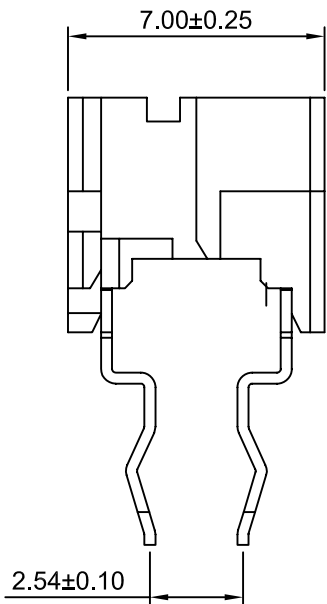

**SPECIFICATIONS:**  
 Current Rating: 1.2A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage:500V AC/minute  
 Housing Material: PBT,UL94V-0(White)  
 Terminal Material: Phosphor Bronze/Tin over Nickel

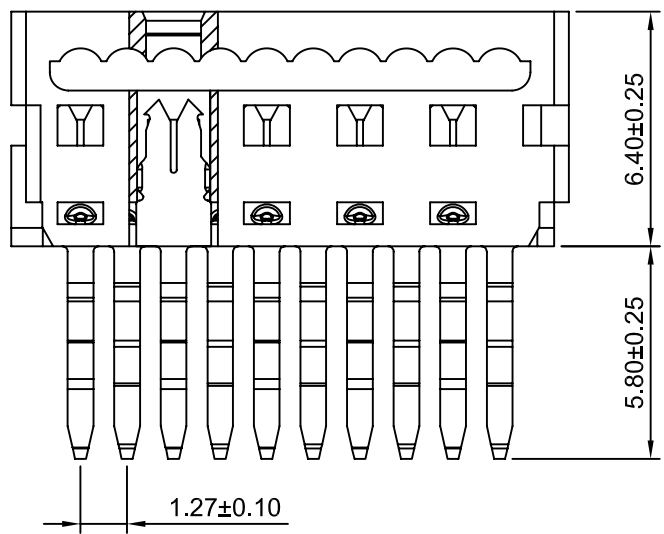

**Ordering Information & Dimensions**

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
4P	3.81	7.59	16P	19.05	22.83
6P	6.35	10.13	18P	21.59	25.37
8P	8.89	12.67	20P	24.13	27.91
10P	11.43	15.21	22P	26.67	30.45
12P	13.97	17.75	24P	29.21	32.99
14P	16.51	20.29	26P	31.75	35.53

**CJTconn** CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm, Scale: 5:1, Sheet: 1 of 1  
 Draw BY: Tony Su, Approved: Jack Yin

Title: **1.27mm Flat IDC Connector**

General Tolerance			ANGLE±
A0	NEW RELEASE	2017.04.16	
REV	DESCRIPTION	DATE	

DRAW NO: **D1272HV-XP** REV A0