

FOR REFERENCE ONLY

SPECIFICATIONS:

AC RATING: 10 AMPS @115VAC (RESISTIVE LOAD)
5 AMPS @115VAC (INDUCTIVE LOAD)
3 AMPS @115VAC (LAMP LOAD)
DC RATING: 10 AMPS @28VDC (RESISTIVE LOAD)
5 AMPS @28VDC (INDUCTIVE LOAD)
3 AMPS @28VDC (LAMP LOAD)
TYPE 7 CONTACT ARRANGEMENTS:
1/2 AMPERAGE LOADS SHOWN ABOVE
MECHANICAL LIFE: 500,000 CYCLES
ACTION: MOMENTARY SNAP OR PUSH PULL
OPERATING FORCE:
SERIES 20 & 30: 3 TO 5 POUNDS MOMENTARY
1/2 TO 2 POUNDS PUSH-PULL
SERIES 22 & 32: 2 TO 3 POUNDS MOMENTARY
WEIGHT: .050 POUNDS MAXIMUM
CASE: ALUMINUM ALLOY 2011-T3,
CLEAR ANODIZED IAW MIL-A-8625
PLUNGER: GLASS FILLED NYLON
BODY: DIALLYL PHTHALATE IAW MIL-M-14
TERMINALS: THREADED #2-56 NC-2B



SW-200-23
TERMINAL
(4)




SW-200-25
#2 LOCKWASHER
(4)



SW-200-72
#2-56 SCREW
(4)

TERMINAL
HARDWARE

B NX303AB1B-XX

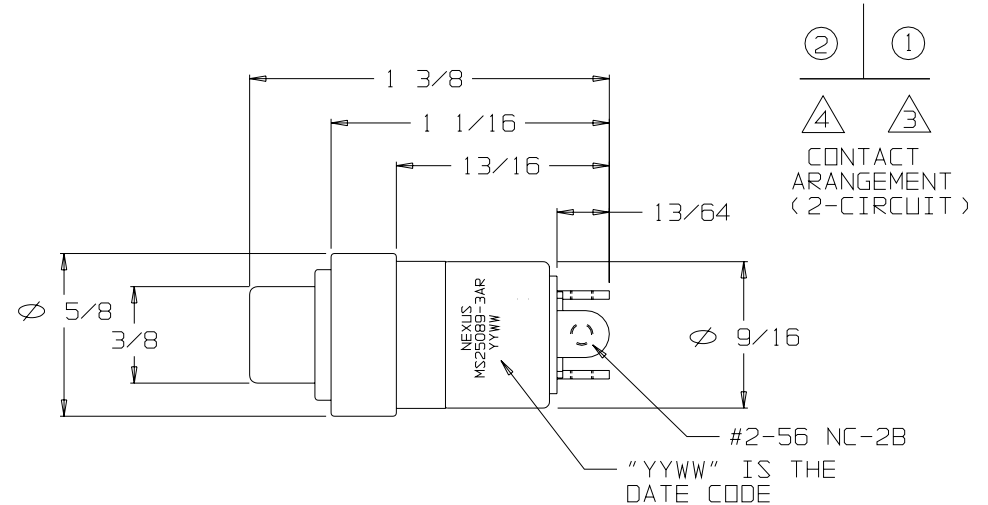

DESCRIPTION

DUSTPROOF "300 SERIES" MOMENTARY SWITCH
2 CIRCUIT (CAN BE JUMPED FOR SPOT)
ADAPTER TYPE "A", COLOR BLACK
BUTTON #1, COLOR BLACK

ORDERING INFORMATION:

NX303AB1B-00 SWITCH ONLY
NX303AB1B-02 SWITCH, TERNIMAL HARDWARE
NX303AB1B-00EU SWITCH (ROHS) ONLY
NX303AB1B-02EU SWITCH (ROHS), TERNIMAL HARDWARE

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.

DWN. BY	EWT	DATE	11/07/07	MATERIAL	N/A
CHECKED BY		DATE		FINISH	N/A
APPR. BY		DATE		WEIGHT	—
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON				SCALE	N/A
				ANGLES	
.XX .XXX .XXX				TITLE	SWITCH 2-CIRCUIT MOMENTARY BLACK BUTTON (MS25089-3AR)
— ±.003 ±.5°				DO NOT SCALE DWG.	SHEET 1 OF 1
NEXUS STAMFORD, CONN				SIZE	B
				DWG. NO.	NX303AB1R-XX

A	CORRECTED CONTACT 3 & 4 POSITION		4/14/08	EWT
LET.	REVISION	CN #	DATE	CHK.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[NX303AB1R](#)