

1

2

3

4

5

6




7

8

9






10

ROHS



RECOMMEND P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

装前塞示意图

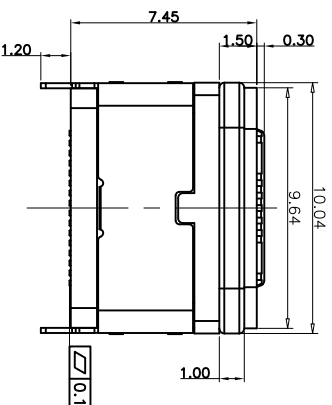

USB TYPE C PIN ASSIGNMENTS			
PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SRU2
A6	DP1	B7	DM2
A7	DM1	B6	DP2
A8	SRU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

TABLE:

NO	PART	QTY	Material
1	PLASTIC SHELL	1	PA UL94 V-0 BLACK
2	CONTACT	16	C7025,TIN80U"/Au3u"/Ni30u"PLATED
3	MID PLATE	1	SUS301,N0 PLATING
4	HOUSING	1	LCP UL94 V-0 BLACK
5	SHIELDING PLATE	1	SUS,NI PLATED
6	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK
7	CAP	1	LCP UL94 V-0 BLACK

TYPE C 16P 防水母座立式贴板 L=7.45mm (U型全塑款)

胶芯: LCP/黑色/无卤; 端子: 高导电/镀半金锡3U";

中钢片: 不锈钢/

素材: U型胶壳: LCP/黑色/无卤;

护脚外壳: 不锈钢/镀镍; 环保要求: ROHS+REACH (0.7K/卷)

产品图
PRODUCT CHART DWG

公差一览表

TOLERANCE	UNLESS OTHERWISE
X. ±0.25	X. ±5.°
.X ±0.20	X. ±2.°
.XX ±0.05	.XX ±1.°
.XXX ±0.02	.XXX ±0.5°

深圳市精拓金电子有限公司
Shenzhen Jing tuo Jin Electronics Co., Ltd.

单位	MM	制图	审核	产品料号	918-468K2027V10000
UNITS	MM	DRAWING	审核	PRODUCT PART NO.	
比例	1:1	SCALE	审核	TYPE-C3.1防水母座立式L=7.45	
日期	2020-05-22	DATE	审核	两脚插板, LCP黑胶双排SMT16PIN	
核准	黄国荣	APPRO	核准	版本	AO

MAPX

MODIFICATION

DRW

DATE